

Base Antennas

VG1502 VG1505 VG4505



VG1502 VG4505

Patented Internal Match - Patent #5,612,705

150-174 MHz / 450-512 MHz

The Laird Voyager® is field tunable for fast field installation and deployment. The rugged design provides high performance in harsh environments. The Voyager® is intended for applications that require weather durability, ease of installation and higher gain. Features include 6061-T6 aluminum construction and a patented broadband internal matching network. gold anodized aluminum construction and plated brass “N” connectors. Each VOYAGER® is tested on a HP® network analyzer prior to shipment.

FEATURES / BENEFITS

- **Patented internal matching:** Will not ice up, corrode, or de-tune.
- **Internally potted:** Eliminates moisture build up and is vibration resistant.
- **Gold anodized:** Harder than diamonds coating that is corrosion resistant and durable
- **UV inhibiting insulators:** Will not crack or disassemble with UV exposure.
- **Nickel plated brass connector:** Will not seize or gall like aluminum.
- **Available FM2 mounting kit:** For the fastest, easiest, and most durable mounting.


SPECIFICATIONS

ELECTRICAL	
Frequency range	See chart
VSWR	< 1.5:1
Nominal gain	See chart
Maximum power	250 W
Nominal impedance	50 Ω
Vertical Beamwidth	2 dBi: 70°, 5 dBi: 35°
Bandwidth @ 1.5:1 VSWR	2 dBi: 5% of center frequency. 5dBi: 2.5% of center frequency. 6 dBi: 2% of center frequency.
Bandwidth @ 2.0:1 VSWR	2 dBi: 10% of center frequency. 5dBi: 5% of center frequency. 6 dBi: 4% of center frequency.
Termination	N Female
Lightning Protection	DC Ground
MECHANICAL	
Finish	Gold Anodized
Radiator Material	6061-T6 Aluminum Tube
Wind Survival	100 M.P.H. (Standard)
Length	VHF: 0 dBi 55", 5dBi 102" UHF: 0 dBi 25", 5 dBi 35" typical extended
Weight	VHF Unity: 1.2 lbs. VHF 5dBi: 2.5 lbs. UHF Unity: 0.6 lbs. UHF 5 dBi 1.5 lbs.
Equivalent Flat Plate Area	VHF Unity: 36"² VHF 5 dBi: 72"² UHF Unity: 15"² UHF 5 dBi: 22"²
Windthrust @ 100 M.P.H. & 0°F	VHF Unity: 4.5 lbs. VHF 5 dBi: 11.6 lbs. UHF Unity: 2.5 lbs. UHF 5 dBi: 4 lbs.
Mounting information (sold separately)	FM2 All VHF & UHF Models

ORDERING GUIDE

Model	Frequency	Gain
VG1502	150-174 MHz	2 dBi
VG1505	150-174 MHz	5 dBi
VG4505	450-512 MHz	5 dBi
FM2	Mounting Bracket (1 pair)	

RADIATION PATTERNS

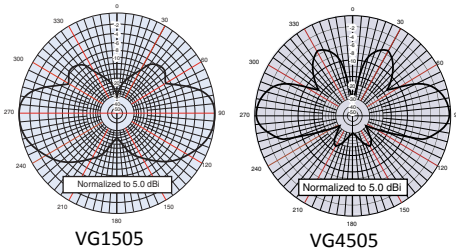

Americas: +1.847 839.6925

IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941 IAS-EUSales@lairdtech.com

Asia: IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-Voyager 150-174_450-512 0516

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2016 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Laird Connectivity](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [Y4503](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [C37](#) [MAF94051](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#) [MIKROE-2352](#)