


2.50mm (.098") Pitch Header

5045

Vertical, Square Pin Polarizing Lock



Features and Benefits

- Sizes 2 to 20 circuits
- 0.64mm (.025") square wire pins

Reference Information

Packaging: Bulk
 UL File No.: E29179
 CSA File No.: LR19980
 Mates With: 5051 housings, KK® 2.50mm (.098") and 5102-N
 Designed In: Millimeters

Electrical

Voltage: 250V
 Current:

AWG	22	24	26	28
	3.0A	2.5A	2.0A	1.5A

Contact Resistance: 20 milliohms max.
 Dielectric Withstanding Voltage: 1000V AC/1 min.
 Insulation Resistance: 1000 Megohms min.

Physical

Housing: 6/6 nylon, UL 94V-0
 Contact: Brass
 Plating: See Table
 Operating Temperature: -40 to +105°C

Circuits	Order No.		Lead-free
	Tin	Gold	
2	22-04-1021	22-11-1021	Yes
3	22-04-1031	22-11-1031	
4	22-04-1041	22-11-1041	
5	22-04-1051	22-11-1051	
6	22-04-1061	22-11-1061	
7	22-04-1071	22-11-1071	
8	22-04-1081	22-11-1081	
9	22-04-1091	22-11-1091	
10	22-04-1101	22-11-1101	
11	22-04-1111	22-11-1111	


Circuits	Order No.		Lead-free
	Tin	Gold	
12	22-04-1121	22-11-1121	Yes
13	22-04-1131	22-11-1131	
14	22-04-1141	22-11-1141	
15	22-04-1151	22-11-1151	
16	22-04-1161	22-11-1161	
17	22-04-1171	22-11-1171	
18	22-04-1181	22-11-1181	
19	22-04-1191	22-11-1191	
20	22-04-1201	22-11-1201	

www.molex.com/customer.html?seriesNumber=5045

2.50mm (.098") Pitch Mini-Latch™ Header

5046

Right Angle Friction Lock

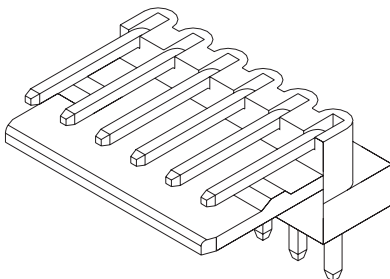

Features and Benefits

- Sizes 2 to 15 circuits
- 0.64mm (.025") square wire pins

Reference Information

Packaging: Bulk
 UL File No.: E29179
 CSA File No.: LR19980
 Mates With: 5051 and 51191 housings
 Designed In: Millimeters

Electrical

Voltage: 250V
 Current:

AWG	22	24	26	28
	3.0A	2.5A	2.0A	1.5A

Contact Resistance: 20 milliohms max.
 Dielectric Withstanding Voltage: 1000V AC/1 min.
 Insulation Resistance: 1000 Megohms min.

Physical

Housing: 6/6 nylon, UL 94V-0
 Contact: Brass
 Plating: Tin
 Operating Temperature: -40 to +105°C

Circuits	Order No.	Lead-free
2	22-05-1022	Yes
3	22-05-1032	
4	22-05-1042	
5	22-05-1052	
6	22-05-1062	
7	22-05-1072	
8	22-05-1082	

Circuits	Order No.	Lead-free
9	22-05-1092	Yes
10	22-05-1102	
11	22-05-1112	
12	22-05-1122	
13	22-05-1132	
14	22-05-1142	
15	22-05-1152	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [67230-005LF](#)