




TRC $\Phi 4.5 \times 10.5$ RoHS Compliant

复合保险丝

Compound Fuse

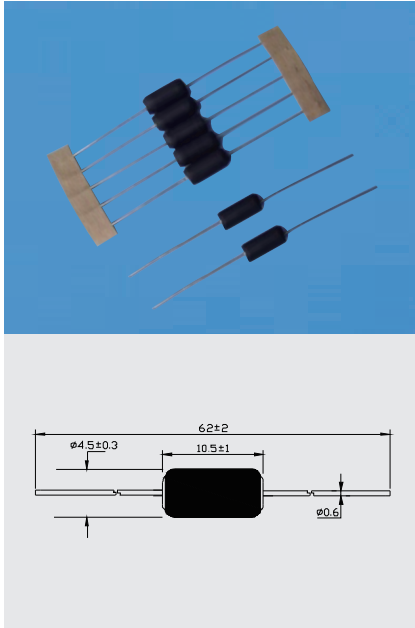

测试标准:
Testing Standard:
IEC60691 IEC-61000-4-5 IEC60127-8 UL1412

工作温度:
Operating Temperature:
-55°C ~ +125°C

额定分断能力:
Interrupting Rating:
300 Amperes at 250V AC

材料:
Materials:
End cap: sn plated iron
Tube: ceramic tube
Lead wire: tinned copper wire
Coat: EVA

焊接方法:
Soldering Method:
Wave soldering: 260°C, 5s max
Manual soldering: 350°C, 3s max

包装:
Packaging:
Automaton taped 1000PCS per inner, 10000PCS per carton

目录编号: Catalog No. 1:1W 2:2W B:3% C:5% D:10%

| 系列 Series | 目录编号 Catalog No. | 额定功率 Rated Power (W) | 额定阻值 Rated Resistance (Ω) | 精度 Tolerance (%) | 额定动作温度 Rated Functioning Temperature Tf ($^{\circ}\text{C}$) | 认证 Approvals | |
|--------------|---------------------|-------------------------|---------------------------------------|---------------------|---|---|---|
| | | | | | |  |  |
| TRC | TRC0041/2C | 1W/2W | 0.47 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0091/2C | 1W/2W | 0.91 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0111/2C | 1W/2W | 1.1 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0121/2C | 1W/2W | 1.2 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0151/2C | 1W/2W | 1.5 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0201/2C | 1W/2W | 2.0 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0221/2C | 1W/2W | 2.2 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0271/2C | 1W/2W | 2.7 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0281/2C | 1W/2W | 2.8 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0331/2C | 1W/2W | 3.3 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0471/2C | 1W/2W | 4.7 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0511/2C | 1W/2W | 5.1 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0561/2C | 1W/2W | 5.6 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0601/2C | 1W/2W | 6.0 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0681/2C | 1W/2W | 6.8 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0751/2C | 1W/2W | 7.5 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0821/2C | 1W/2W | 8.2 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC0911/2C | 1W/2W | 9.1 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC1101/2C | 1W/2W | 10 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC1121/2C | 1W/2W | 12 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC1221/2C | 1W/2W | 22 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC1331/2C | 1W/2W | 33 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC1471/2C | 1W/2W | 47 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC1511/2C | 1W/2W | 51 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC1561/2C | 1W/2W | 56 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |
| TRC | TRC1681/2C | 1W/2W | 68 Ω | $\pm 5, \pm 10$ | 115-226 $^{\circ}\text{C}$ | ○ | ● |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuses with Leads \(Through Hole\)](#) category:

Click to view products by [lanson](#) manufacturer:

Other Similar products are found below :

[89096-013](#) [89096-015](#) [A170100400](#) [BKPCH-5-R](#) [252010](#) [252.062](#) [SS-5-800MA-AP](#) [SS-5F-3.15A-AP](#) [252004](#) [263.750](#) [LKB-3](#) [0252001.M-0471005.MAT1L](#) [0473004.MAT1L](#) [0473.750HAT1L](#) [0471002.MAT1L](#) [0471.500MAT1L](#) [0491002.MAT1](#) [0473001.HAT1L](#) [0473002.HAT1L](#) [0473.500HAT1L](#) [SS-5-1.6A-AP](#) [SS-5F-2.5A-AP](#) [SR-5H-2.5A-AP](#) [SS-5-6.3A-BK](#) [BK-AGC-2-1-2-R](#) [BK-GMA-8-R](#) [BK-GMD-4-R](#) [BK-GMT-4A](#) [BK-MDL-1](#) [BK-PCD-5-R](#) [BK-C520-5-R](#) [BK-GMC-10-R](#) [BK-MDA-V-30-R](#) [BK-S500-500-R](#) [BK-SFE-20](#) [BK-GMA-1-25-R](#) [GMQ-3-2-10](#) [GLX-12](#) [PCB-34-R](#) [SR-5H-4A-AP](#) [RST 5-AMMO](#) [PCF-1/2-R](#) [SR-5H-3.15A-BK](#) [SR-5H-2A-BK](#) [047101.5MAT1L](#) [0471003.MAT1L](#) [GFA-12](#) [89096-005](#) [SR-5F-1-6A-BK](#)