




<b>DATA SHEET</b>	5550 6585
<b>SILVYN® FPAG</b>	valid from : 26.10.2004

The SILVYN® FPAG straight conduit gland gives a high tensile strength with its all round teeth and vibration protection.  
The gland can be removed from the conduit using a small screwdriver.

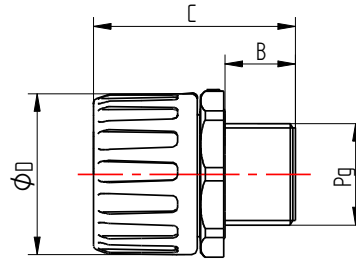

**Dimension table:**

Part no.	connection thread	B	C	ØD	suitable conduit
5550 6585	SILVYN FPAG Pg 7	9,0	32,5	19,0	FPAS 10
5550 6605	SILVYN FPAG Pg 9	10,0	37,0	23,5	FPAS 13
5550 6625	SILVYN FPAG Pg 11	10,0	36,0	28,5	FPAS 16
5550 6635	SILVYN FPAG Pg 13,5	10,0	36,0	28,5	FPAS 16
5550 6655	SILVYN FPAG Pg 16	11,0	41,0	32,0	FPAS 21
5550 6665	SILVYN FPAG Pg 21	12,0	47,0	44,0	FPAS 28
5550 6675	SILVYN FPAG Pg 29	12,0	49,0	50,5	FPAS 34
5550 6685	SILVYN FPAG Pg 36	12,0	56,5	62,7	FPAS 42
5550 6695	SILVYN FPAG Pg 48	12,0	61,0	76,0	FPAS 54

**Technical features:**

Connecting thread: Pg 7 to Pg 48 in acc. to DIN 40 430  
 Protection class: IP 66 bar, test in acc. to DIN 40 050  
 Temperature range: - 40°C to +135°C  
 Colour RAL: 9005 (UV resistant) (7001)  
 Properties: Anti-vibration and tamper resistant  
 High pull off strength  
 Flame retardant UL 94 V2  
 Halogen free  
 Oil and solvent resistant  
 Material: PA 66

Approvals:



For more information please see our current catalogue.  
Please do not hesitate to contact our laboratory if there any questions regarding resistance against aggressive agents and special oil.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Lapp Kabel manufacturer](#):*

Other Similar products are found below :

[00008746](#) [00008749](#) [00008779](#) [00008822](#) [00008867](#) [00008899](#) [00008979](#) [00009045](#) [00100004](#) [00100014](#) [00100024](#) [00100034](#) [0010004](#)  
[0010005](#) [0010006](#) [0010007](#) [0010008](#) [0010009](#) [0010010](#) [0010011](#) [0010012](#) [0010016](#) [00100214](#) [00100224](#) [00100234](#) [0010025](#) [0010026](#)  
[0010027](#) [0010028](#) [0010029](#) [0010030](#) [0010031](#) [0010032](#) [0010033](#) [0010034](#) [00100414](#) [00100424](#) [00100444](#) [0010045](#) [0010046](#) [0010047](#)  
[0010049](#) [0010050](#) [0010052](#) [0010054](#) [0010056](#) [00100634](#) [00100644](#) [00100654](#) [00100664](#)