

REVERSE VOLTAGE: 20 - 80 V
CURRENT: 0.5 A
SOD-123FL






Features

- ✧ Low forward surge current
- ✧ Ideal for surface mouted applications
- ✧ Low leakage current

Mechanical Data

- ✧ Case:JEDEC SOD-123FL,molded plastic over passivated chip
- ✧ Polarity: Color band denotes cathode end
- ✧ Weight: 0.0008 ounces, 0.022 gram
- ✧ Mounting position: Any

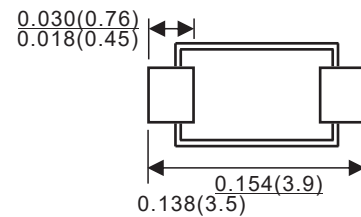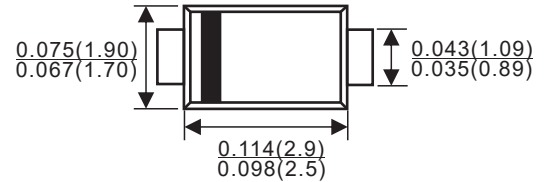

Dimensions in inches and(millimeters)

Absolute Maximum Ratings (Ta = 25 °C)





Symbol	Parameter	Value					Units
V _{RRM}	Maximum recurrent peak reverse voltage	20	30	40	60	80	V
V _{RMS}	Maximum RMS voltage	14	21	28	42	56	
I _O	Continuous Forward Current	0.5					A
I _{FSM}	Non-repetitive Peak Forward Surge Current ^{*1}	15					A
P _d	Power Dissipation	410					mW
T _J	Operating temperature range	-55 to +175					°C
T _{STG}	Storage Temperature	-55 to +150					°C

^{*1} 8.3 ms single half sine-wave

Electrical Characteristics (Ta = 25 °C)

Device	Symbol	Parameter	Conditions	Min	Typ	Max	Units
MBR0520	V _F	Forward Voltage	I _F = 0.5A			0.45	V
MBR0530						0.55	
MBR0540						0.55	
MBR0560						0.70	
MBR0580						0.80	
MBR0520	I _R	Reverse Current	V _R = 20V			20	μA
MBR0530			V _R = 30V				
MBR0540			V _R = 40V				
MBR0560			V _R = 60V				
MBR0580			V _R = 80V				
MBR series	C _T	Capacitance	V _R = 4V, f = 1MHz		30		pF

Typical Characteristics

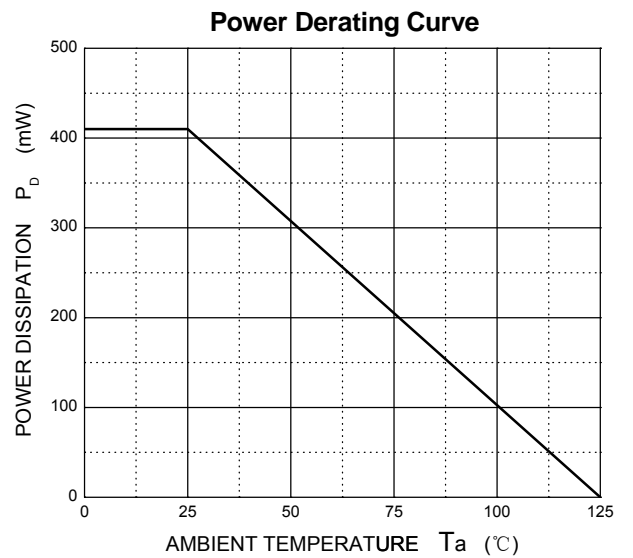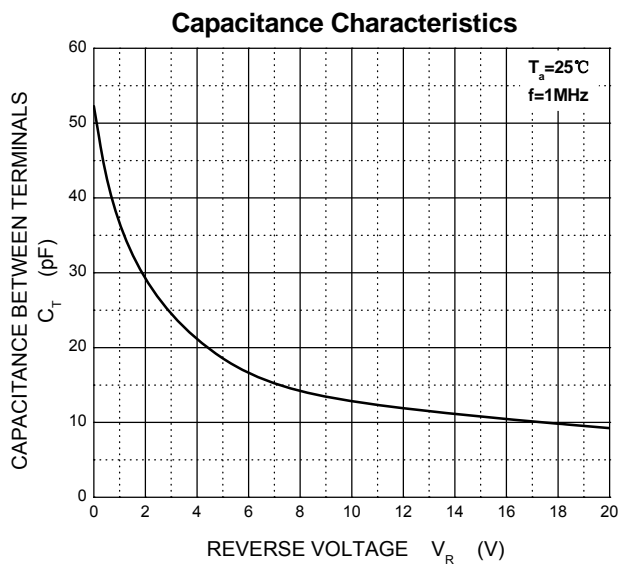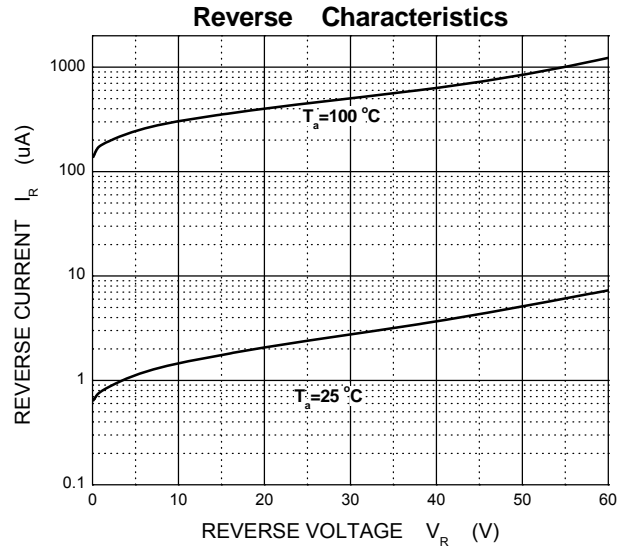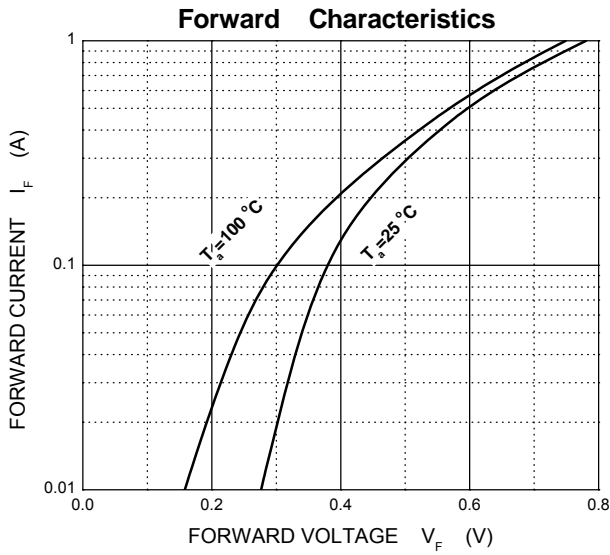

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [LGE](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS16E6433HTMA1](#)
[BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#)
[SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#)
[MBRB30H30CT-1G](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#)
[NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA2100-HF](#)
[ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ060-M3/5BT](#)
[NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#)