




MA500-1 - MA500-3

Adjustable Torque Screwdrivers with Window Scale and ESD Safe



PRODUCT DETAILS



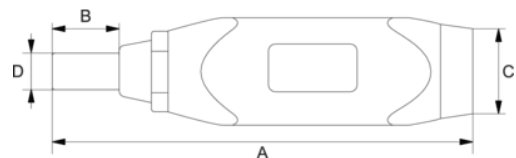


- Over-torque limiting clutch
- Single scale in cN.m
- Range covering between 10 cN.m and 450 cN.m torque values
- Torque measurement clockwise only, can be used to loosen fasteners without affecting the internal mechanism
- Accurate to $\pm 6\%$ CW
- Clicking system triggers a tactile and audible signal
- 1/4" hex non-magnetic spring-loaded bit holder to avoid damaging sensitive equipment or components in electronic applications
- All-metal 3-lobe handle
- Easy to operate
- Easy-read scale
- Lindström's torque screwdrivers offer comfort with a User-friendly shape and non-slip grip
- Ideal choice for flexible applications as well as volume production
- Supplied in an adjustable semi-transparent square tube
- Supplied with a factory declaration of conformity in compliance with international standards
- Standards: ISO 6789/IEC61340-5-1
- ESD safe (IEC 61340-5-1 and EN 100015-1)
- Made in USA



Follow the Fish!



PRODUCT ATTRIBUTES

Product					A	B	C	D	
MA500-3A			1/4 in	5 cNM	171 mm	18,2 mm	32 mm	9,6 mm	0.308 kg
MA500-1A			1/4 in	1 cNM	138 mm	18,2 mm	28 mm	9,6 mm	0.2 kg
MA500-2A			1/4 in	2 cNM	157 mm	18,2 mm	28 mm	9,6 mm	0.26 kg



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Screwdrivers, Nut Drivers & Socket Drivers](#) category:

Click to view products by [Lindstrom](#) manufacturer:

Other Similar products are found below :

[1406504-2](#) [272012M](#) [271001M](#) [30246](#) [HMM-HH](#) [32024](#) [TL10416](#) [612020B](#) [35-045](#) [6951](#) [83](#) [9977](#) [EMF](#) [99833](#) [RB1](#) [S3166V](#) [X103V](#)
[XTD10TP](#) [X108N](#) [HS7N](#) [HS618N](#) [LN25MMN](#) [HS18N](#) [P4N](#) [R146N](#) [P12SN](#) [R5324N](#) [99764N](#) [P8N](#) [99312N](#) [R3163N](#) [SX101N](#) [LN22N](#)
[XTD10N](#) [9955MMN](#) [995MMN](#) [996MMN](#) [LN25N](#) [THS9N](#) [R3166N](#) [R144N](#) [RB2N](#) [HS10N](#) [99964BPN](#) [HS11N](#) [HS12N](#) [THS8N](#) [TL12N](#)
[LN23BPN](#) [R5168N](#)