

SMD Wire Wound Common Mode Line Filter---CLF Series



Feature

- Compact Size.
- Mn and Ni-Zn cores for different noise suppression frequency range.
- RoHS compliant.
- Operating temperature range $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$ (Including self - temperature rise).

Application

- Low voltage Power Supply.
- CAN BUS.


Production identification

CLF 9060 - 2R2 Y
 ① ② ③ ④


- ① Series name: SMD Common Mode Line Filter
- ② Size: $9.2 \times 6.0 \times 5.0 \text{mm}$
- ③ Inductance: $2.2 \mu\text{H}$
- ④ Tolerance: $\pm 30\%$ or $\pm 50\%$

Series Shape and Dimensions (Unit:mm)


Dimensions(mm):

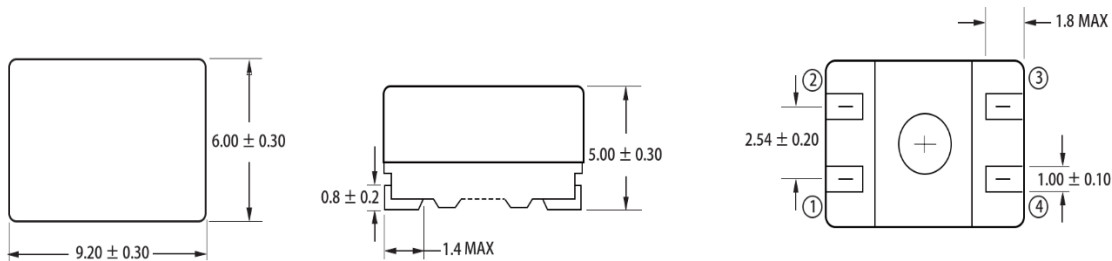

Recommended Layout:



Schematic:



Notes:

CLF9060 SPQ=1000.




SMD Wire Wound Common Mode Line Filter---CLF Series



CLF9060 Electrical Characteristics

Part Number	Inductance (μH)	DCR Max (Ω)	Rate Current (A)	Impedance(Z)	
				Freq. Range(MHz)	Min. Value(Ω)
CLF9060-100Y	10+50%/-30%	0.08	1.6	20-300	200
CLF9060-250Y	25±30%	0.16	1.0	20-150	600
CLF9060-400Y	40±30%	0.25	0.9	20-100	800
CLF9060-510Y	51±30%	0.16	1.0	20-100	1500
CLF9060-251Y	250±50%	0.13	1.2	3.0-20	600
CLF9060-471Y	470±50%	0.14	1.1	2.0-20	1000
CLF9060-501Y	500±50%	0.15	1.0	1.0-20	1000
CLF9060-102Y	1000±50%	0.31	0.8	1.0-15	1500
CLF9060-202Y	2000±50%	0.42	0.6	1.0-5	3000
CLF9060-472Y	4700±50%	0.90	0.4	0.3-3	4000
CLF9060-652Y	6500±50%	1.05	0.3	0.3-2	5000

Typical Impedance vs. Frequency Curves

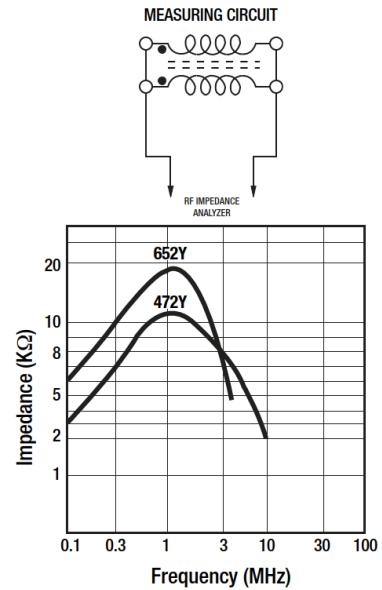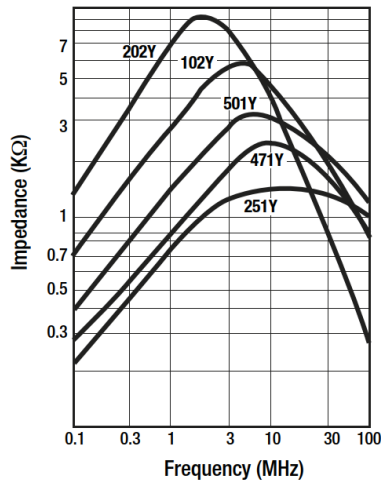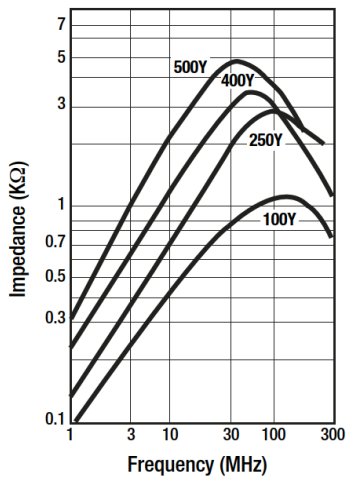

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [Linekey](#) manufacturer:

Other Similar products are found below :

[74279408](#) [PE-62911NL](#) [PE-64683](#) [RD5122-6-9M6](#) [RGCMF1210900H3T](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [T8114NLT](#) [RD5122-10-6M0](#)
[TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSC1520JH000](#)
[UALSU10VR15019](#) [UALSU9VD070100](#) [36-00037](#) [5701610000](#) [UALW21HS200290](#) [UALW21HS072450](#) [UALSU9HF050500](#)
[UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#) [PE-67531](#) [TLH10UB 113](#)
[OR5](#) [2752045447](#) [CMS3-11-R](#) [7351V](#) [7408-RC](#) [CMF16-153131](#) [744252510](#) [T8116NLT](#) [CMS2-10-R](#) [DLW44SN101SK2L](#) [FE2X10-4-2NL](#)
[744253200](#) [744253101](#) [744252220](#) [TX8111NLT](#) [UAL30VR3500470](#) [CTX01-19077-R](#) [T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#)
[7446630047](#)