



281/282 Series Panel Mount Fuseholders for MICRO™/TR3 Fuses

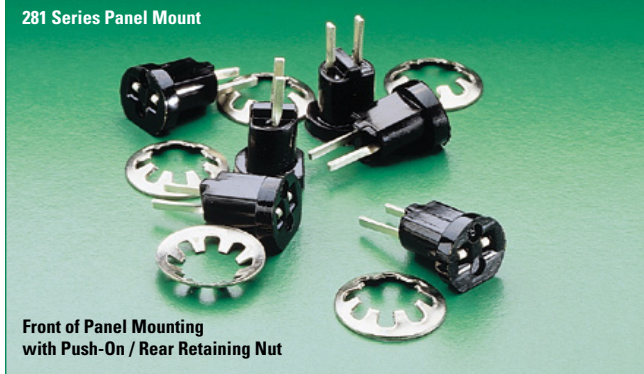


Dimensions units in inch (mm)

0281 0001
Front of Panel Mounting with Push-On / Rear Retaining Nut

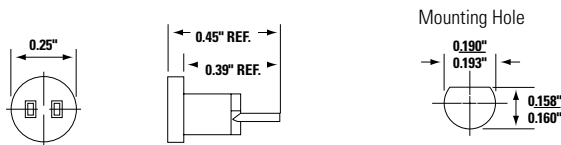


Dimensions units in inch (mm)

0282 0002 and 0282 0008
Rear of Panel Mounting with Threaded Knurled / Front Retaining Nut

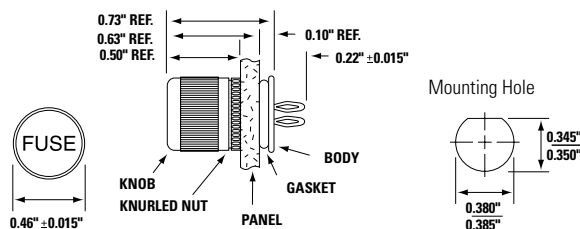

0282 0001 and 0282 0007
Front of Panel Mounting with Threaded Hex / Rear Retaining Nut

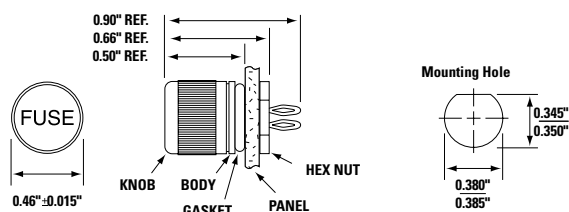

Product Characteristics

| Compatible Fuses | MICRO™/TR3 |
|---------------------------|--|
| Description | Panel mount holder designed for Littelfuse MICRO™/TR3 type and other fuse series with .025" diameter leads rated to 5 amps |
| Electrical Specs | Rated at 5 amperes for any voltage up to 125 |
| Mounting Specs | Maximum panel thickness is .09" |
| Ambient Temp. | -40 °C to +125 °C |
| Retaining Hardware | "Push-On" retaining nut |
| Molded Material | Black Thermoset |
| Terminal Material | Beryllium copper with silver plating |

Product Characteristics

| Compatible Fuses | MICRO™/TR3 |
|---------------------------------------|--|
| Description | RF-shielded and drip-proof screw-on knob design enables use of Littelfuse MICRO™/TR3 fuses when presence of moisture exists at front of panel-s1 |
| Electrical Specs | Rated at 5 amperes for any voltage up to 125 |
| Mounting Specs | Front panel mount, maximum panel thickness: .093" Rear panel mount, maximum panel thickness: .125" |
| Ambient Temp. | -40 °C to +125 °C |
| Mounting Gasket Options | Neoprene (282001, 282002) or Conductive Silicone (282007, 282008) |
| Retaining Hardware Options | Threaded Hex Nut (282002, 282008) or Threaded Knurled Nut (282001, 282007) |
| Molded Material | Black thermoset |
| Housing, Knob and Nut Material | Aluminum, untreated |
| Terminal Material | Beryllium copper with silver plating |
| Knob Seal | Buna "N" O-ring inside the knob |

Note: Refer to [Fuseology](#) for information on proper fuseholder re-rating.

Additional Information



Datasheet 281 Series



Resources 281 Series



Samples 281 Series



Datasheet 282 Series



Resources 282 Series



Samples 282 Series

Ordering Information

| Ordering Number | Packing |
|-----------------|-------------------|
| 02810001H | Bulk (100 Pieces) |

| Ordering Number | | Gasket Type | Packing |
|---|--------------------------------------|---------------------|-------------------|
| Rear Mounting (Threaded Knurled Nut) | Front Mounting (Threaded Hex Nut) | | |
| 02820002Z | 02820001Z | Neoprene | Bulk (100 Pieces) |
| 02820008Z | 02820007Z | Conductive Silicone | Bulk (100 Pieces) |

Note: These products are shipped unassembled and without fuse device

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuse Holder](#) category:

Click to view products by [Littelfuse](#) manufacturer:

Other Similar products are found below :

[570-290-741P40](#) [570-290-751P40](#) [020417G](#) [020418E](#) [6R30A1B](#) [F600A3B](#) [80910030](#) [8601.2020](#) [G15A2SPQ](#) [9-3557-GP REV A](#) [HDJ-B](#)
[R6J30A3S](#) [HFH-1](#) [RF30A2B](#) [RF30A3SP](#) [15600-08-10](#) [BK/FHN19G](#) [BK/HHM](#) [BK/HKP-CCHH](#) [BK/HKP-JJ](#) [BK/HTJ-LES-FUSE](#) [HMG-](#)
[241](#) [HTJ-LES-FUSE](#) [C4044-1](#) [2086-1](#) [2193](#) [2602](#) [2650](#) [178.000100](#) [FHN31G1](#) [T30A2B](#) [G4PB8](#) [2660](#) [2799](#) [CQ-209V](#) [HKP-CCHH](#)
[R6F30A2S](#) [341001A](#) [345621A](#) [CVRMCC](#) [4202](#) [4407](#) [4408](#) [4413](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [BK/FHN31G1](#) [BK/HC-5](#)