

LogiLink®



2-Port USB Quick Charger

Art. No.: PA0164

Compact and light-weighted 2-port USB car charger, compatible to QC 3.0/2.0 fast charging. Suitable for travelling!

Features:

- » Support QC 3.0/2.0 Fast Charging
- » Input: 12V/24V DC
- » USB 1 Output: 3.6V-6.5V/3A (19.5W), 6.5V-9V/2A (18W), 9V-12V/1.5A (18W)
- » USB 2 Output: 5V/2.1A (10.5W)
- » Supports: OCP, OVP, OTP short circuit protection
- » Built in intelligent IC, compatible with iPhone/iPad/mobile devices/Tablet PC/power banks and other USB devices



Specification:

Input	12V/24V DC
Input Current	3A max
Output	USB1: 3.6V-6.5V/3A (19.5W), 6.5V-9V/2A (18W) 9V-12V/1.5A (18W) USB2: 5V/2.1A (10.5W)
Standby Power Loss	≤0.1W
Ripple And Noise	<300mV
Port	2x USB-A female
Operating Temperature Range	0~45°C
Storage Temperature Range	-20°C ~ 85°C
Operating Relative Humidity	10% ~ 80% RH
Storage Relative Humidity	10% ~ 93% RH
Efficiency	88%
Dimension	79 x 34 x 34 mm
Weight	25g



PA0164



4 052792 047714

Made in China





* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered namework of their respective owners.

LogiLink®



2-Port USB Quick Charger

Art. No.: PA0164

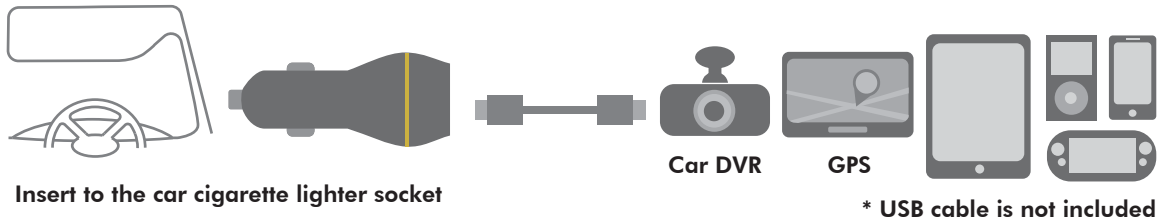

Package Contents:

- » 1 x USB Car Charger
- » 1 x User Manual

Package Informations:

- » Packing Dimension: mm
- » Packing Weight: kg
- » Carton Dimension: mm
- » Carton Q'ty: pcs
- » Carton Weight: kg

Best Connectivity



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered namework of their respective owners.



PA0164



4 052792 047714

Made in China

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Circular Connector](#) category:

Click to view products by [Logilink](#) manufacturer:

Other Similar products are found below :

[C015](#) [10F006](#) [001](#) [1](#) [5M2530B10P](#) [600247N007](#) [600259N006](#) [600273N007](#) [600432N009](#) [6280-2PG-519](#) [6280-3PG-311](#) [6280-3SG-311](#)
[6280-7SG-3DC](#) [6280-7SG-522](#) [6282-5PG-311](#) [6282-6PG-519](#) [6282-8SG-311](#) [6283-11](#) [6283-15](#) [6290](#) [6293](#) [6382-2PG-311](#) [6382-2PG-3DC](#)
[6382-2SG-321](#) [6382-2SG-3DC](#) [6382-4SG-516](#) [67-03E20-37P](#) [681-PMG](#) [CXC3106A1811S](#) [CXS3102A14S2P](#) [CXS3102A181S](#)
[CXS3106A14S6S](#) [D38999/20FC8SA L/C](#) [MB12P-1](#) [MB12R-6](#) [7251-2PG-300](#) [7251-2SG-300](#) [7251-4PG-300](#) [7251-4SG-300](#) [7251-5PG-300](#)
[7251-5SG-300](#) [7251-6SG-300](#) [7251-7PG-300](#) [7251-8PG-300](#) [7271-6SG-300](#) [7282-3PG-300-CH3](#) [73000005663](#) [75-190011-03P](#) [75-190216-08S](#) [75-190218-10P](#) [75-214636-52P](#) [75-474118-10P](#) [75-474211-03P](#)