

M12-Splitters/T-Connectors


ASBS 2 M12-S2326 | ASBS 2 M12-S2325
ASBS 2 M12-S1387 | ASBS 2 M12-S3995



M12 Male to 2xM12 Female

Splitter/T-connector, two way, 4-poles with one M12 male connector and two M12 female connectors.


ASBS 2 M12-S2326

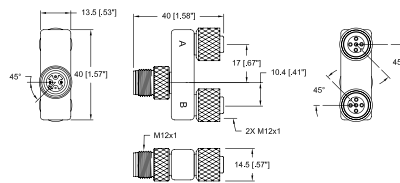


M12 Male to 2xM12 Female

Splitter/T-connector, two way, 5-poles with one M12 male connector and two M12 female connectors.


ASBS 2 M12-S2325

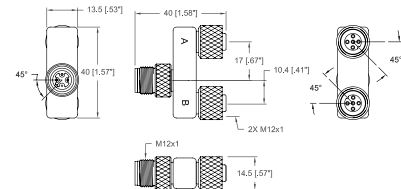

ASBS 2 M12-S3187

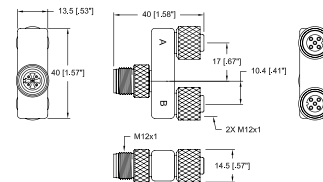


ASBS 2 M12-S3995

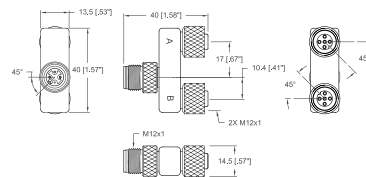


Pin Assignments

Face Views

ASBS 2 M12-S2326




ASBS 2 M12-S2325




Wiring Diagrams


ASBS 2 M12-S2326




ASBS 2 M12-S2325



ASBS 2 M12-S3187



ASBS 2 M12-S3995





M12-Splitters/T-Connectors

ASBS 2 M12-S2326 | ASBS 2 M12-S2325 | ASBS 2 M12-S3187 | ASBS 2 M12-S3995

Technical Data

Environmental









Degree of protection IP 67 / NEMA 6P
 Operating temperature range -15°C (+5°F) / +90°C (+194°F)

Mechanical

Molded body PUR, black
 Insert PUR, black
 Contact Brass, gold over nickel plated
 Coupling nut Brass, nickel-plated
 O-ring FKM

Electrical

Contact resistance ≤ 5 mΩ
 Current rating 4 A
 Voltage rating 250 V

Part Number	Pins	Characteristics
ASBS 2 M12-S2326	4	 
ASBS 2 M12-S2325	5	 
ASBS 2 M12-S3187	5	 
ASBS 2 M12-S3995	5	 

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [Lumberg](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [8R5006A18A120](#)
[1604232](#) [1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-](#)
[01088](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01032](#) [43-01162](#) [43-10000](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#)
[8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-01338](#) [XS2RD4265](#) [RSC 4/9](#)
[XS2R-D426-1](#) [XS8A-0441](#)