MSAT-P25

PIN Diode Attenuator Shunt Element

Rev. V1


MACOM

Features

- Low Distortion Harmonics @ 85 dBc
- Broadband performance, >10 GHz
- Low Insertion Loss & High Attenuation, 27 dB
- RoHS* Compliant

Description

A broadband, High Linearity medium power shunt PIN Attenuator element $1.9 \times 1.1 \text{ mm}$ DFN package. This device is designed for wireless Telecommunication infrastructure and test instrument applications. It is also suited for other applications in $0.1 \sim 10 \text{ GHz}$ range.



Electrical Specifications: $T_A = +25^{\circ}C$ (measured on evaluation board)

Parameter	Test Conditions	Units	Min.	Тур.	Max.
Breakdown Voltage (V _{BR})	I _R = 10 μA	V	200	—	_
Lifetime (L _T)	I _F = 10 m, I _R = 6 Ma, 10% / 90%	ns	2000	3000	5000
Minimum Series Resistance (R _s)	I = -100 mA, 500 MHz	Ω	_	1.5	2.5
High Series Resistance (R _S)	I = -10 μΑ, 500 MHz	Ω	1200	2200	3000
Low Series Resistance (R _s)	I = -50 mA, 500 MHz I = -50 mA, <10 GHz	Ω	20 28	30 35	40

Absolute Maximum Ratings

Parameter	Absolute Maximum	
Forward Current (I _F)	200 mA	
Reverse Voltage (V _R)	200 V	
Thermal Resistance (θ_{JC})	+20°C/W	
Junction Temperature (T _J)	+175°C	
Storage Temperature (T _{STG})	-65°C to +125°C	
Assembly Temperature (T _{SOLDER})	+260°C	

* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

1

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.


MSAT-P25

PIN Diode Attenuator Shunt Element




Rev. V1

Performance Curves

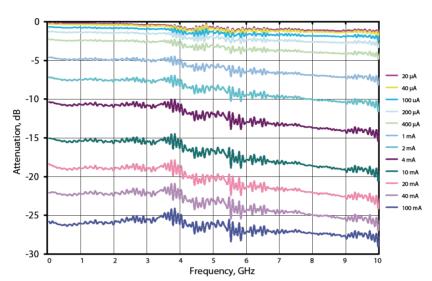

Attenuation vs. Current



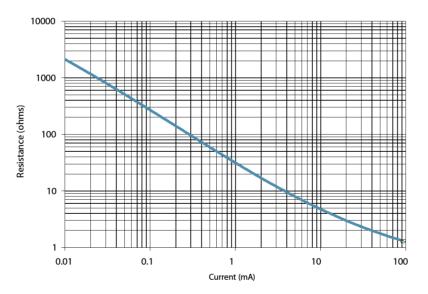

2


MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

MSAT-P25


PIN Diode Attenuator Shunt Element

Rev. V1

PCB Layout

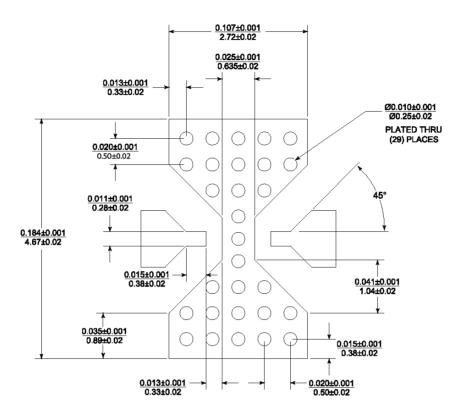

Outline (2012)

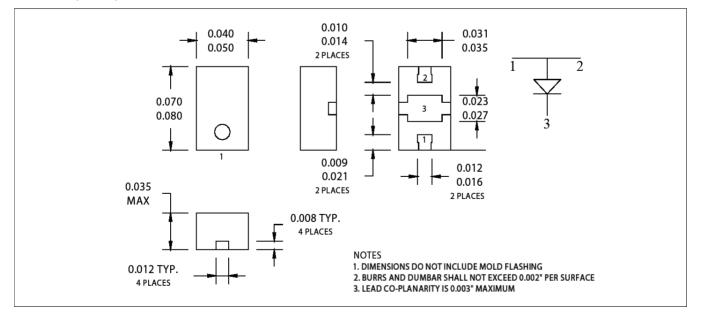

3

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.

For further information and support please visit: <u>https://www.macom.com/support</u>



PIN Diode Attenuator Shunt Element



Rev. V1

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

⁴

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for PIN Diodes category:

Click to view products by MACOM manufacturer:

Other Similar products are found below :

MA45471 MA4SPS502 APD2220-000 APD0810-000 MA4GP907 MA4L032-186 MA4L401-30 MA4P606-258 MA4P7435NM-1091T MA4PK2000 MA4PK2001 MA4PK2004 MADP-007167-12250T MADP-030025-13140P MA4SPS421 MA4PBL027 MA4P404-30 MA4AGFCP910 MA4P7101F-1072T MA4L022-30 MA47047-54 BAR 89-02LRH E6327 UM7108B UM9701 1SV308,L3F UM9301SM 5082-3077 GC4723-42 MA4L011-1088 MSW2001-200 SMP1321-000 M17X1008 UM4010SM UM6002B UM7006A UM7006B UM7108C GC4742-42 MADP-000015-000030 MGPN1503-C01A UMX512 LXP1000-23-2 LXP1004-23-2 MPP4205A-206 MPP4201-206 LXP1002-23-0 LXP1004-23-0 MPP4202-206 MPP4205-206 MPC8050-206