

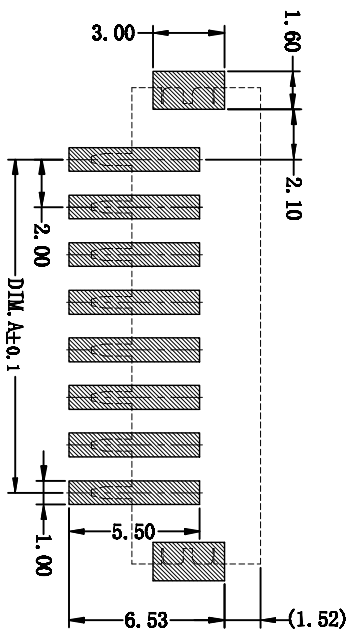


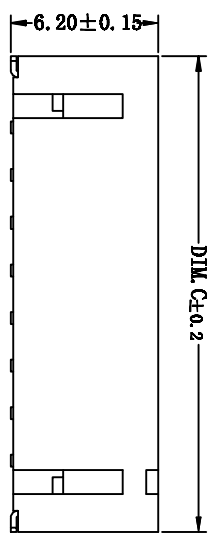



注：本板为禁止传输、复制、编辑文件，以及用其内容进行复制

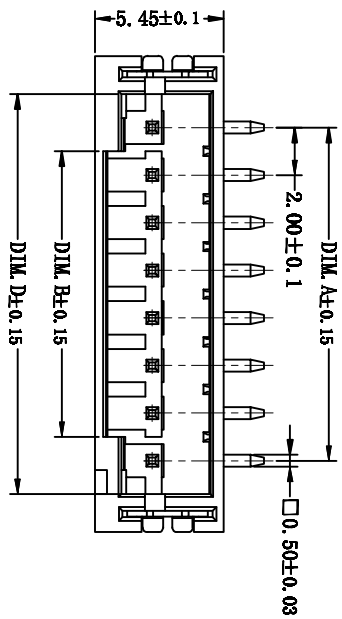

Circuits	Dimensions (mm)			
	A	B	C	D
02	2.00	1.00	8.00	4.80
03	4.00	2.00	10.00	6.80
04	6.00	4.00	12.00	8.80
05	8.00	6.00	14.00	10.80
06	10.00	8.00	16.00	12.80
07	12.00	10.00	18.00	14.80
08	14.00	12.00	20.00	16.80
09	16.00	14.00	22.00	18.80
10	18.00	16.00	24.00	20.80
11	20.00	18.00	26.00	22.80
12	22.00	20.00	28.00	24.80
13	24.00	22.00	30.00	26.80
...	...	...	...	...
20	38.00	36.00	44.00	40.80

- 技术要求:
- 1、塑件材料: LCP (UL-94V-0)
  - 2、接插件: 黄铜镀锡
  - 3、接插电阻:  $\leq 10m\Omega$
  - 4、绝缘电阻:  $\geq 1000M\Omega$
  - 5、额定电压: 250V AC DC
  - 6、额定电流: 2.0A AC DC
  - 7、耐压: 能承受1000V AC/Minute
  - 8、工作温度:  $-25^{\circ}\sim +105^{\circ}$
  - 9、可靠性试验: 浸锡面积 $\geq 95\%$ 温度 $260^{\circ}\text{C}$ , 时间 $2.5\pm 0.5$ 秒
  - 10、熔和锡等六大有害物质含量符合环保要求

How to order

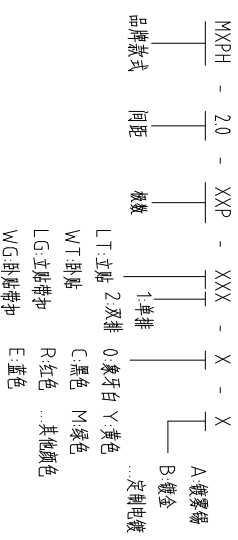

SUGGESTED PCB LAYOUT (COMPONENT SIDE)

GENERAL TOLERANCES

0.X	$\pm 0.25$	X' $\pm 3^{\circ}$
0.XX	$\pm 0.12$	
0.XXX	$\pm 0.05$	X'X' $\pm 0.5^{\circ}$

序号	名称	材料	数量	备注
1	接插电阻	LCP(UL94V-0)	1	
2	接插件		1	
3	射形贴片板		1	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	SHEET/OF	1/1
APP	DATE	SCALE	MM	A4	
NAME: MXP H-2.0-XXP-LT1					

MAXXU 慈溪市迈旭电子有限公司

CIXI MAXXU ELECTRONICS CO.,LTD

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [MAX](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)  
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)  
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)  
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)  
[803-43-024-10-001000](#)