

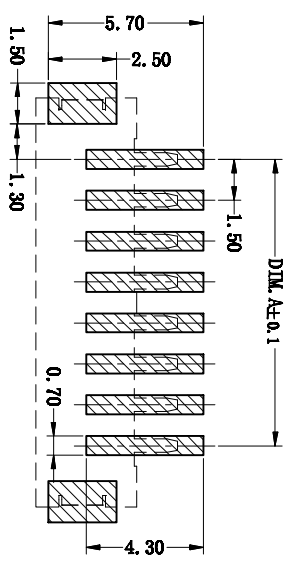

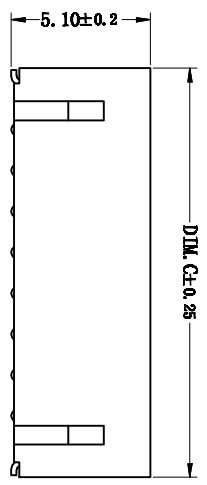



注：本板为禁止传输、复制、编辑文件，以及用其内容进行交流

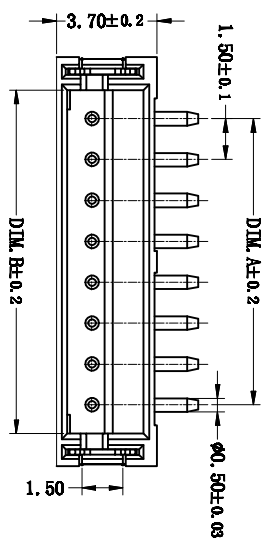

**SUGGESTED PCB LAYOUT
(COMPONENT SIDE)**

GENERAL TOLERANCES

0.X	±0.25	X.°	±3°
0.XX	±0.12	X.X°	±0.5°
0.XXX	±0.05	X.X°	±0.5°

序号	名称	材料	数量	备注
1	贴片电阻	L2P (0402-0)	1	
2	贴片电容		1	
3	贴片焊球		1	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	23.08.10	UNITS	MM
APP	DATE		SCALE	1:1	A4
	NAME				MXZH-15-XXP-LT1


MAXXU 慈溪市迈旭电子有限公司
CIXI MAXXU ELECTRONICS CO.,LTD

REV	ECN NO.	2	3	4	5	6

Circuits	Dimensions (mm)		
	A	B	C
02	1.50	3.60	6.00
03	3.00	5.10	7.50
04	4.50	6.60	9.00
05	6.00	8.10	10.50
06	7.50	9.60	12.00
07	9.00	11.10	13.50
08	10.50	12.60	15.00
09	12.00	14.10	16.50
10	13.50	15.60	18.00
11	15.00	17.10	19.50
12	16.50	18.60	21.00
13	18.00	20.10	22.50
...
20	28.50	30.60	33.00

- 技术要求:**
- 1、塑件材料: LCP (UL-94V-0)
 - 2、接触件: 黄铜镀镍
 - 3、接触电阻: $\leq 20m\Omega$
 - 4、绝缘电阻: $\geq 500M\Omega$
 - 5、额定电压: 125V AC DC
 - 6、额定电流: 1.0A AC DC
 - 7、耐压: 能承受500V AC/Min ute
 - 8、工作温度: $-25^{\circ}\sim +105^{\circ}$
 - 9、可焊性试验: 浸锡面积 $\geq 95\%$ 温度 $260^{\circ}\pm 5^{\circ}$, 时间 2.5 ± 0.5 秒
 - 10、铅和镉等六大有害物质含量符合环保要求

How to order

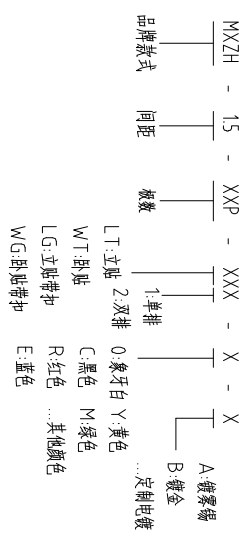

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [MAX](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)
[803-43-024-10-001000](#)