



NOTE:
 ▲ Material & Finish See Table;
 2. Circuit Diagram For Switch



3. Characteristic:
 3-1.Current Rating :1A max.
 3-2.Contact Resistance:50mOhms max
 3-3.Insulation Resistance:1000M0hmsΩ min./500VDC
 3-4.Dielectric Withstanding Voltage:500VAC/1minute
 3-5.Mating Force: 8N Max, Withdrawal Force: 1N Min.;
 3-6.Durability: 3000 Cycles
 3-7.Operating Temperature:-25°C to+85°C
 4. Critical Dimensions Marked ▼ " Should Check By QC.
 5. Please Contact PROMAX Sales Representative to Verify Product Details.

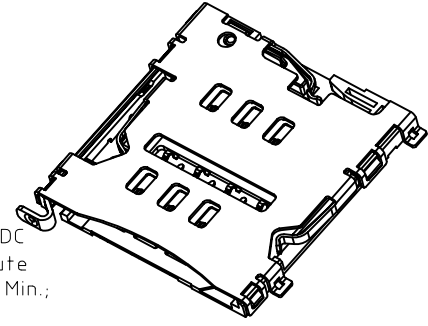

6	Shell	Stainless Steel	Nickel Under Plated Overall.
5	Lever	Stainless Steel	/
4	Cam	Stainless Steel	/
3	Housing	Thermoplastics	Black,UL94V-0
2	Detect	Copper Alloy	Gold Flash on Solder Tails ; Gold Flash on Contact Area;
1	Terminal	Copper Alloy	Nickel Under Plated Overall.
Item	Part Name	Material	Description

General		Angle		设计 DESIGN	校阅 CHECK	承认 APPRO.
X±0.50		X'±2°				
.X±0.30		.X'±1°				
.XX±0.20		.XX'±0.5°				
GENERAL TOLERANCE UNLESS OTHERWISE NOTED						
NEW RELEASE						
工程变更通知单号 ECN(DCN) NO.	版次 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.	

兆星精密电子 (深圳) 有限公司

E TITLE: 卡托式 MicroSIM卡 卡座

PART NO. ZX-MSIM-281.55J

PRODUCT SPEC. MICRO SIM CARD

FILE NAME.

SCALE 1:1 UNIT:mm A4 SHEET:1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Memory Card Connectors](#) category:

Click to view products by [Megastar](#) manufacturer:

Other Similar products are found below :

[6407-249V-25273P](#) [6407-249V-25343P](#) [6426-201-21343](#) [69.920.0553.0](#) [MCR60A-98D-2.54DSA\(70\)](#) [809180410000000](#) [DM3AT-SF-PEJM5\(41\)](#) [IC11S-BUR-PNEJL\(71\)](#) [C70210M0083692](#) [2041353-2](#) [308-DS1P0811-192](#) [HM2P09PDR360N9LF](#) [10014744-011TLF](#) [11327-001](#) [11327-002](#) [NX1-32T-KT3K\(05\)](#) [95622-003LF](#) [84648-056HLF](#) [CCM03-3109 B LFT](#) [MS3116J10-6PW](#) [2309923-1](#) [61126-050CAHLF](#) [GTFP08432B1HR](#) [G85D1160022HHR](#) [SCE2MSDZN76A121SN](#) [10014744-011ALF](#) [10014744-011LF](#) [10057542-1211FLF](#) [10067972-000LF](#) [10067972-050LF](#) [10122302-20110LF](#) [G85D1162022HHR](#) [TF-05A](#) [M6014-12](#) [XKNANO-1412](#) [SMN-304-ARP6](#) [MIS11-S1F1-2000-A](#) [SMN-308-ARSP7](#) [MCS-302S-KT1B](#) [SMN-308-ACSP7](#) [K-DYX-008](#) [K-DYX-004](#) [C7024-03](#) [SMO-1030](#) [MCS-110-KT](#) [SIM-217](#) [SNO-1355-KT](#) [SMO-1025-P10](#) [SIM-211S-P6](#) [SNO-1440](#)