







- Common mode chokes for telecom applications
- High impedance to minimize common mode noise
- Excellent EMI performance
- Operate temperature range: -40 °C to +125 °C (Including self temperature rise)
- Storage temperature range: -40 °C to +125 °C



Electrical Specifications @25 °C


Part Number	OCL @100KHz, 0.1V	DCR	Turns Ratio	Rated Current $\Delta T \cong 40^\circ\text{C}$	Hi-Pot 1mA/1S/50Hz
	1-4, 2-3				1-4 TO 2-3
CM422SG471N	470uH $\begin{smallmatrix} +50\% \\ -30\% \end{smallmatrix}$	200m Ω Max.	1 : 1	0.90A Max.	500Vac
CM422SG102NB	1000uH $\begin{smallmatrix} +50\% \\ -30\% \end{smallmatrix}$	300m Ω Max.	1 : 1	0.70A Max.	500Vac
CM422SG222N	2200uH $\begin{smallmatrix} +50\% \\ -30\% \end{smallmatrix}$	540m Ω Max.	1 : 1	0.50A Max.	500Vac
CM422SG472N	4700uH $\begin{smallmatrix} +50\% \\ -30\% \end{smallmatrix}$	900m Ω Max.	1 : 1	0.30A Max.	500Vac
CM422SG722N	7200uH $\begin{smallmatrix} +50\% \\ -30\% \end{smallmatrix}$	1500m Ω Max.	1 : 1	0.28A Max.	500Vac

MECHANICAL

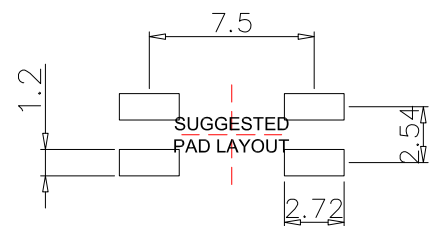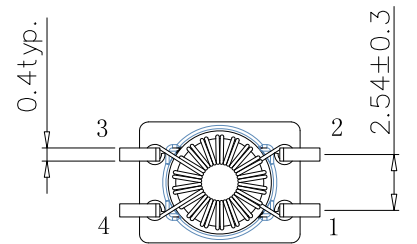


Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS


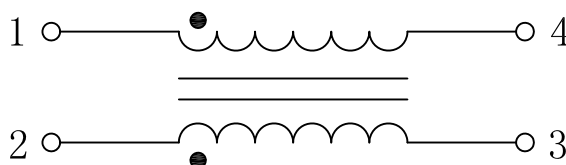


Impedance Vs Frequency


Common Mode

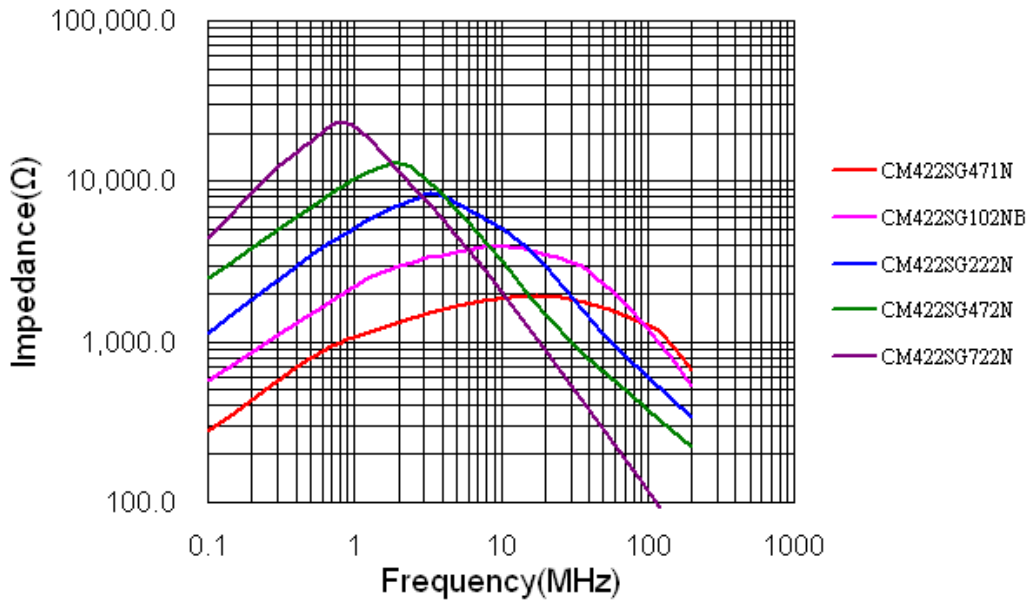

Different Mode

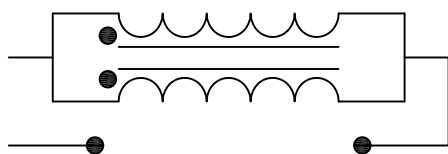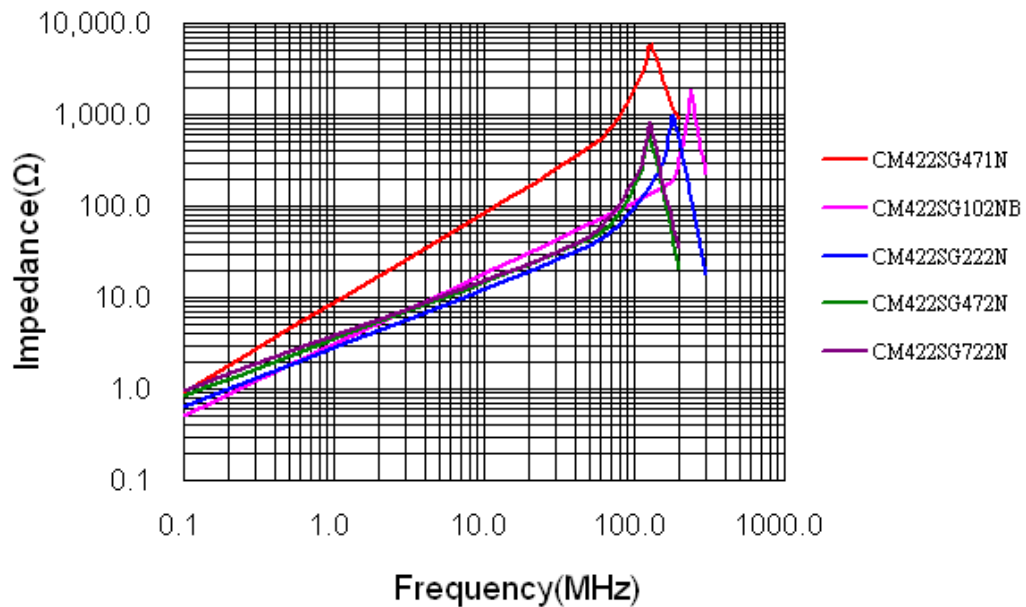

Common Mode

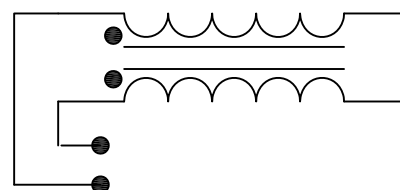

Different Mode

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [Mentech](#) manufacturer:

Other Similar products are found below :

[PE-64683](#) [RD5122-6-9M6](#) [RD6137-6-7M5](#) [RD8147-16-3M0](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [RD7147-25-0M7](#) [TCM0806G-350-2P-T](#)
[TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [UALW21HS072450](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#)
[36-00029-01](#) [PE-67531](#) [TLH10UB](#) [113 0R5](#) [2752045447](#) [7351V](#) [CMF16-153131](#) [RD7147-6-6M0](#) [T8116NLT](#) [FE2X10-4-2NL](#) [36-00029-07](#)
[T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#)
[WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#) [PAC6006.264NLT](#)
[PH9408.105NLT](#) [PH9408.494NLT](#) [PAC6006.104NLT](#)