

PIC24FJ256GB410 Plug-In Module (PIM) Information Sheet

Overview

The PIC24FJ256GB410 Plug-in Module is designed to demonstrate the capabilities of the PIC24FJ256GB410 family using the Explorer 16 and LCD Explorer Demonstration Boards. Most of the pins from the device are mapped directly to the PIM connector (100-Pin ICE). The exceptions are those pins that are remapped to provide remappable functionality to the pins in the PICtail™ Plus socket. [Table 1](#) below shows the exceptions of the PIC24FJ256GB410 pins that are not directly connected to the ICE connector.

Pin Mapping

There are several device pins that don't have a one-to-one connection to the ICE connector. Some are hard-wired to a certain location, while others are mapped to the connector through jumpers.

[Table 1](#) summarizes the device pins that don't have one-to-one connections.

Table 1: Pin Mapping Exceptions (No Direct Connections)

Pin Function	Device Pin	PIM Pin	Jumper
SEG12/RP16/USBID/RF3	51	95	N/A
VBUS/RF7	54	1	J2
SEG50/OCM1C/CTED3/RG15	1	1	J2
D-/RG3	56	89	J4
SEG46/PMD9/RG1	89	89	J4
D+/RG2	57	90	J5
SEG49/PMD8/RG0	90	90	J5
COM4/SEG47/SCK4/PMD10/RF1	88	14	J6
COM4/SEG47/SCK4/PMD10/RF1	88	88	J6
SEG1/AN21/C1INC/C2INC/C3INC/RP27/DAC1/PMA2/PMALU/RG9	14	51	J7
SEG1/AN21/C1INC/C2INC/C3INC/RP27/DAC1/PMA2/PMALU/RG9	14	14	J7
SEG59/CTED11/PMA16/RG14	95	N/C	N/A

Jumpers

[Table 2](#) is the jumper table on the silkscreen of the PIM. This table uses schematic net names rather than the fill pin function.

Table 2: Jumpered Pins

Jumper	Pin 1	Pin 2	Pin 3
J2	SEG50/RG15	PIM_1	VBUS/RF7
J4	PMD9/RG1	PIM_89	D-/RG3
J5	PMD8/RG0	PIM_90	D+/RG2
J6	PIM_88	COM4/PMD10/RF1	PIM_14
J7	PIM_14	RG9	PIM_51

Americas

Atlanta - 678-957-9614
 Austin - 512-257-3370
 Boston - 774-760-0087
 Chicago - 630-285-0071
 Cleveland - 216-447-0464
 Dallas - 972-818-7423
 Detroit - 248-848-4000
 Houston - 281-894-5983
 Indianapolis - 317-773-8323
 Los Angeles - 949-462-9523
 New York - 631-435-6000
 Phoenix - 480-792-7200
 San Jose - 408-735-9110
 Toronto - 905-673-0699

Europe

Austria - Wels - 43-7242-2244-39
 Denmark - Copenhagen - 45-4450-2828
 France - Paris - 33-1-69-53-63-20
 Germany - Dusseldorf - 49-2129-3766400
 Germany - Munich - 49-89-627-144-0
 Germany - Pforzheim - 49-7231-424750
 Italy - Milan - 39-0331-742611
 Italy - Venice - 39-049-7625286
 Netherlands - Drunen - 31-416-690399
 Poland - Warsaw - 48-22-3325737
 Spain - Madrid - 34-91-708-08-90
 Sweden - Stockholm - 46-8-5090-4654
 UK - Wokingham - 44-118-921-5800

Asia/Pacific

Australia - Sydney - 61-2-9868-6733
 China - Beijing - 86-10-8569-7000
 China - Chengdu - 86-28-8665-5511
 China - Chongqing - 86-23-8980-9588
 China - Dongguan - 86-769-8702-9880
 China - Hangzhou - 86-571-8792-8115
 China - Hong Kong SAR - 852-2943-5100
 China - Nanjing - 86-25-8473-2460
 China - Qingdao - 86-532-8502-7355
 China - Shanghai - 86-21-5407-5533
 China - Shenyang - 86-24-2334-2829
 China - Shenzhen - 86-755-8864-2200
 China - Wuhan - 86-27-5980-5300
 China - Xiamen - 86-592-2388138
 China - Xian - 86-29-8833-7252
 China - Zhuhai - 86-756-3210040
 India - Bangalore - 91-80-3090-4444
 India - New Delhi - 91-11-4160-8631
 India - Pune - 91-20-3019-1500
 Japan - Osaka - 81-6-6152-7160
 Japan - Tokyo - 81-3-6880-3770
 Korea - Daegu - 82-53-744-4301
 Korea - Seoul - 82-2-554-7200
 Malaysia - Kuala Lumpur - 60-3-6201-9857
 Malaysia - Penang - 60-4-227-8870
 Philippines - Manila - 63-2-634-9065
 Singapore - 65-6334-8870
 Taiwan - Hsin Chu - 886-3-5778-366
 Taiwan - Kaohsiung - 886-7-213-7828
 Taiwan - Taipei - 886-2-2508-8600
 Thailand - Bangkok - 66-2-694-1351

01/27/15



MICROCHIP

Microchip Technology Inc. • 2355 West Chandler Blvd. • Chandler, AZ 85224-6199


www.microchip.com

The Microchip name and logo, the Microchip logo, and MPLAB are registered trademarks of Microchip Technology Inc. in the U.S.A. and other countries. PICtail is a trademark of Microchip Technology Inc. in the U.S.A. and other countries. All other trademarks mentioned herein are property of their respective companies. © 2015, Microchip Technology Incorporated, Printed in the U.S.A. All Rights Reserved. 6/15

DS50002360A

PIC24FJ256GB410 Plug-In Module (PIM) Information Sheet

Schematic Revision 1.1

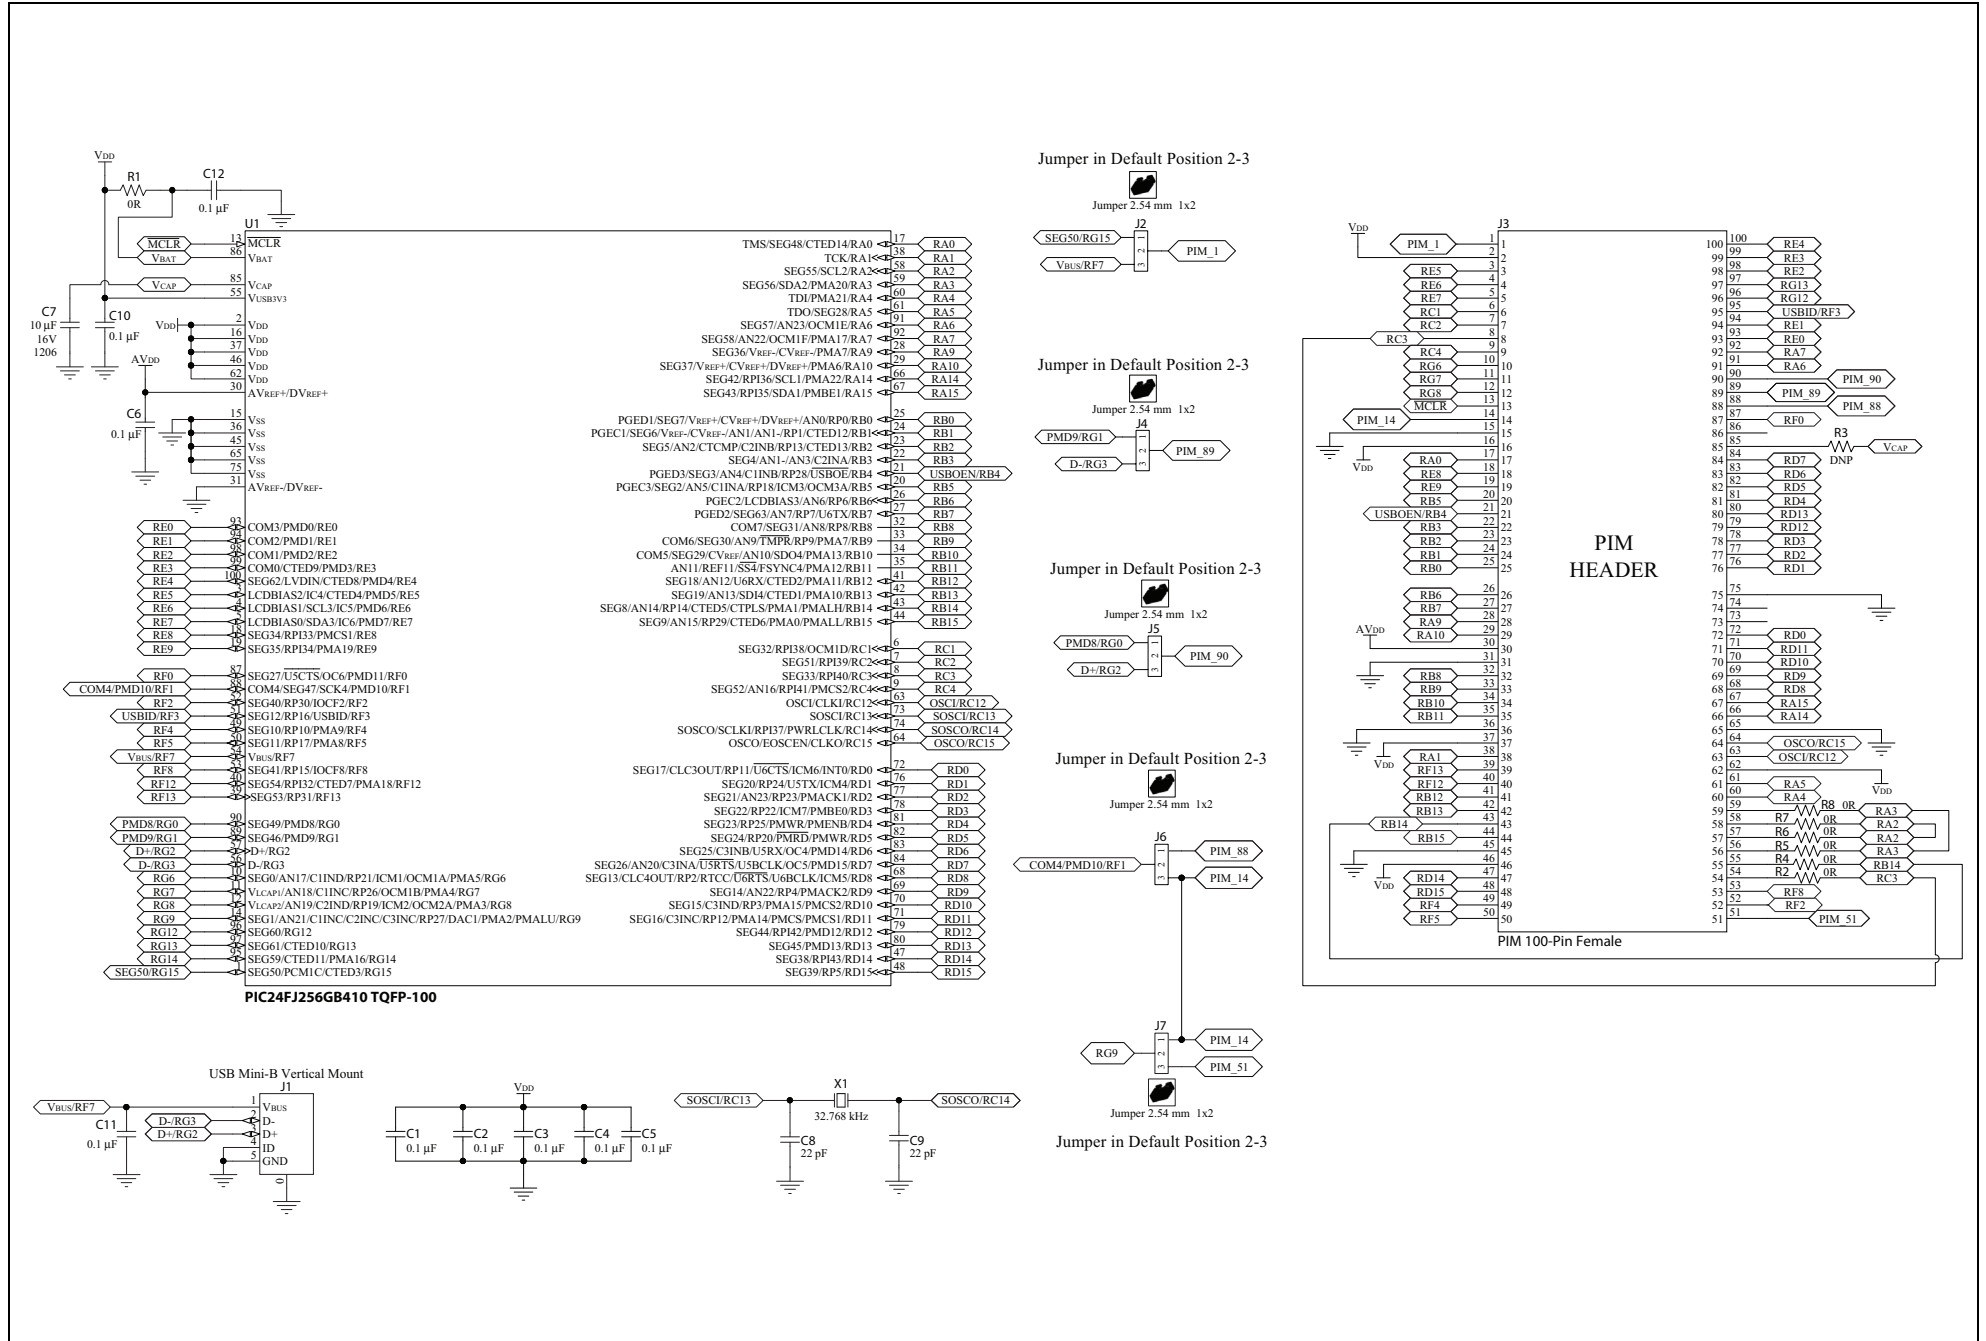

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Daughter Cards & OEM Boards](#) category:

Click to view products by [Microchip](#) manufacturer:

Other Similar products are found below :

[ADZS-21262-1-EZEXT](#) [27911](#) [SPC56ELADPT144S](#) [TMDXRM46CNCD](#) [DM160216](#) [EV-ADUCM350GPIOHZ](#) [EV-ADUCM350-BIO3Z](#)
[ATSTK521](#) [1130](#) [MA160015](#) [MA180033](#) [MA240013](#) [MA240026](#) [MA320014](#) [MA330014](#) [MA330017](#) [TLK10034SMAEVM](#) [MIKROE-](#)
[2152](#) [MIKROE-2154](#) [MIKROE-2381](#) [TSSOP20EV](#) [DEV-11723](#) [MIKROE-1108](#) [MIKROE-1516](#) [SPS-READER-GEVK](#) [AC244049](#)
[AC244050](#) [AC320004-3](#) [2077](#) [ATSMARTCARD-XPRO](#) [EIC - Q600 -230](#) [ATZB-212B-XPRO](#) [SPC560PADPT100S](#) [SPC560BADPT64S](#)
[MA180018](#) [EIC - Q600 -220](#) [AC164134-1](#) [BOB-12035](#) [STM8/128-D/RAIS](#) [AC164127-6](#) [AC164127-4](#) [AC164134-3](#) [AC164156](#) [MA320021](#)
[MA320024](#) [DFR0285](#) [DFR0312](#) [DFR0356](#) [MA320023](#) [MIKROE-2564](#)