



**Fig. 1**

- Series 3XX are available with straight and right angle solder tails.
- Series 350 & 399...009 use MM #3404 and #5011 pins. See pages 179 & 181 for details.
- Series 301, 310 & 399...003 use MM #0156, #1001 & #1103 receptacles. See pages 136 & 137 for details.
- Receptacles use Hi-Rel, 4 finger #30 BeCu contact rated at 3 amps. See page 218 for details.
- Insulators are high temp. thermoplastic.

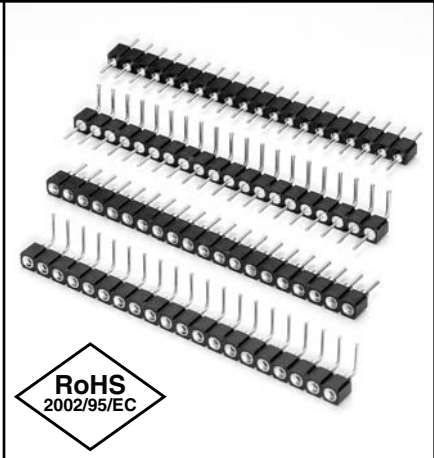


**RoHS**  
2002/95/EC

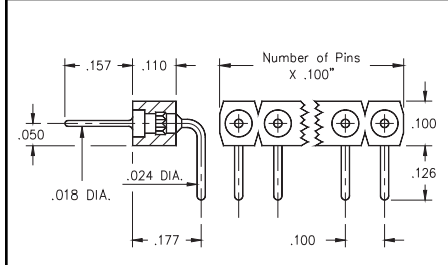


**Fig. 2**

<b>Ordering Information</b>	
<b>Fig. 1</b>	<b>Series 350...006      Straight Pin Header</b>
	350-XX-1__-00-006000 Specify # of pins → 01-64
<b>Fig. 2</b>	<b>Series 399...009      Right Angle Pin Header</b>
	399-XX-1__-10-009000 Specify # of pins → 02-64

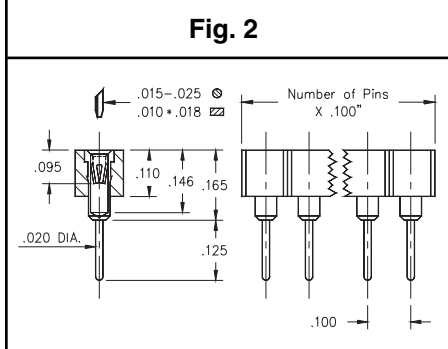


**Fig. 3**

<i>For Electrical, Mechanical &amp; Environmental Data, See pg. 4</i>	<b>XX=Plating Code See Below</b>	<i>For RoHS compliance select ◇ plating code.</i>
SPECIFY PLATING CODE XX=	10◇	90
Pin Plating	10μ" Au	200μ" Sn/Pb
	200μ" Sn	200μ" Sn

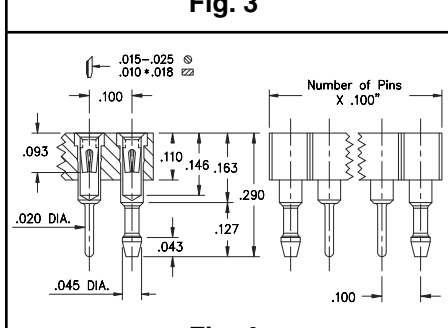

**Fig. 4**

<b>Fig. 3</b>	<b>Series 310...001      Straight Socket</b>
	310-XX-1__-41-001000 Specify # of pins → 01-64
<b>Fig. 4</b>	<b>Series 301...056      Socket w/ Retention Pegs</b>
	301-XX-1__-41-560000 Specify # of pins → 01-64
<b>Fig. 5</b>	<b>Series 399...003      Right Angle Socket</b>
	399-XX-1__-10-003000 Specify # of pins → 01-64

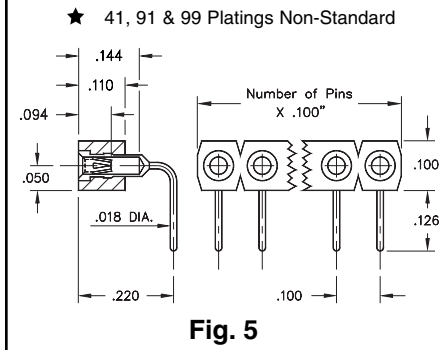

**Fig. 5**

<i>For Electrical, Mechanical &amp; Environmental Data, See pg. 4</i>	<b>XX=Plating Code See Below</b>	<i>For RoHS compliance select ◇ plating code.</i>
SPECIFY PLATING CODE XX=	13◇	91
Sleeve (Pin)	10μ" Au	200μ" Sn/Pb
Contact (Clip)	30μ" Au	10μ" Au
	30μ" Au	200μ" Sn/Pb
	10μ" Au	30μ" Au
	200μ" Sn	200μ" Sn
	200μ" Sn	200μ" Sn
	200μ" Sn	200μ" Sn

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Mill-Max](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [009176003701906](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#)