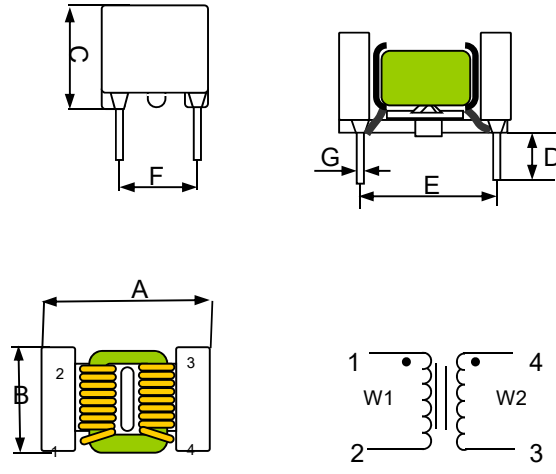


## SPECIFICATION FOR APPROVAL

CUSTOMER		CUST P/N.	
ITEM	Data Line Filter	Description	BCB0308WN-6R7
PART NO.	302-91939	DATE	2015.10.14

<p>(1) DIMENSION(UNIT:mm)</p> 		A	10.0±0.5	mm
		B	7.0±0.5	mm
		C	7.0±0.5	mm
		D	3.0±0.5	mm
		E	7.5±0.5	mm
		F	5.0±0.5	mm
		G	∅0.6(REF)	mm
		H		mm

(2) ELECTRICAL REQUIREMENTS			
TEST CONDITION	FREQUENCY	VOLTAGE	(3) TEST INSTRUMENTS
			LCR-METER:
L <sub>1-2=4-3</sub>	6.7μH(Min)	100KHz 1V	HP-4291A
			V WK3260B
DCR <sub>1-2=4-3</sub>	20.0mΩ(Max)	KHz V	DC RESISTANCE METER:
			V WK3260B
IDC	3.0A(Max) at ΔT=40°C (TYP)	100KHz 1V	CURRENT SOURCE:
			V TH2816B+1320
Z	600Ω(Min) @ 100MHz	KHz V	RFIMPEDANCE/MATERIAL ANALYZER
			V HP-4291A
		MHz V	GW PUNCTURE INSULATION TESTER
			HP-4291A

(4) TURNS: 10Ts(REF)

(5) MATERIAL LIST		
ITEM	MATERIAL	DESCRIPTION
1	CORE	C6 SH6.5×4.5×3CT
2	WIRE	∅0.35mm(2UEW+NY)
3	BASE	BA4.3-3.5
4	VARNISH	BC-359

REMARK:	APPROVED	CHECKED	DRAWN BY
	<i>Simon</i>	辛海峰	張小萍

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Common Mode Chokes / Filters](#) category:*

*Click to view products by [MINGSTAR](#) manufacturer:*

Other Similar products are found below :

[74279408](#) [PE-62911NL](#) [PE-64683](#) [RD5122-6-9M6](#) [RGCMF1210900H3T](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [T8114NLT](#) [RD5122-10-6M0](#)  
[TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#) [IND-0110](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSC1520JH000](#) [UALSU10VR15019](#)  
[UALSU9VD070100](#) [36-00037](#) [5701610000](#) [UALW21HS200290](#) [UALW21HS072450](#) [UALSU9HF050500](#) [UALSU9H0208000](#)  
[UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#) [PE-67531](#) [TLH10UB](#) [113 0R5](#) [2752045447](#)  
[CMS3-11-R](#) [7351V](#) [7408-RC](#) [CMF16-153131](#) [744252510](#) [T8116NLT](#) [CMS2-10-R](#) [DLW44SN101SK2L](#) [FE2X10-4-2NL](#) [744253200](#)  
[744253101](#) [744252220](#) [TX8111NLT](#) [UAL30VR3500470](#) [CTX01-19077-R](#) [T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [7446630047](#) [744136](#)