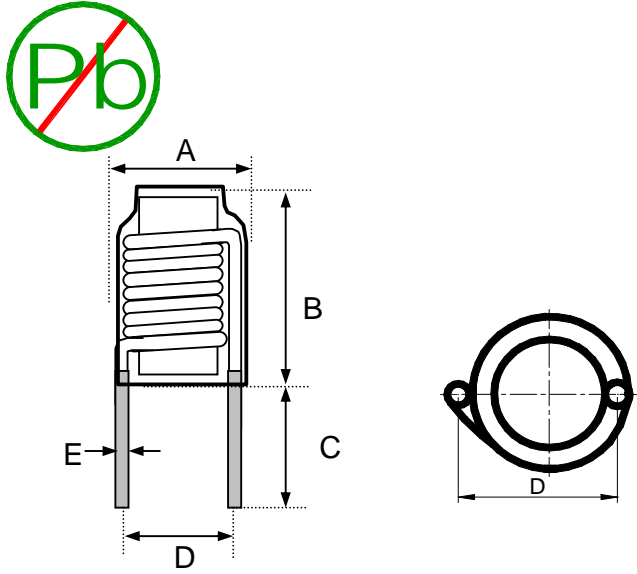


產品製作規格書

產品料號	398-95903	VER:0	產品名稱:	IPB0620N/1.0-17.5-4R7M						
圖面說明(單位:mm)			使用材料	注意事項						
			A	R 6x20 (無鉛)						
			B	Ø1.0mm(1PEW) 原色						
			C							
			D							
			E							
			F							
			尺寸 (mm)							
			A	12.0 (Max)	E	Ø1.0 ± 0.1				
			B	22.0 (Max)	F					
			C	3.5 ± 0.5	G					
D	8.5 ± 1.0	H								
	測試儀器	L (µH)	DCR Ω (Max)	IDC A(Max)	測試條件					
	TH2816B	4.7±20%	0.015	8.0	200KHz,0.25V					
客戶編碼	產品料號	送樣編號	修改項目	修改參數						
	398-95903	SZ09-01030								
作業內容			包裝方式							
1.用R6x20的無鉛CORE. 2.用1PEWØ1.0mm的馬達線,繞17.5Ts(REF). 或者用外調空芯線圈:Ø1.0x6.0x17.5 Ts. 3.CORE與線圈點2021A.B膠固定. 4.使用UL套管Ø9x22mm. 5.上錫高度:平CORE以上0.5~2mm. 6.生產以無鉛制程制作.			A	100	PCS/袋	D				
			B	3	袋/盒	E				
			C	10	盒/箱	F				
			7. 8. 9.			修改記錄				
							時間	料號	修改內容	
							1			
	2									
	3									
	4									
	5									
	6									
	7									
	8									
	9									
注意事項			備 注							
1.可使用同等功能儀器測試.										
2.以感值為主,圈數為輔.			A	1pcs產品的重量: 5.9g						
3.產品L值按100%全測, DCR值按10%抽測.			B							
			C							
			D							
核準:_____			審核:_____		製表: 劉麗	發文日期: 2009.03.27				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [MINGSTAR](#) manufacturer:

Other Similar products are found below :

[74279408](#) [PE-62911NL](#) [PE-64683](#) [RD5122-6-9M6](#) [RGCMF1210900H3T](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [T8114NLT](#) [RD5122-10-6M0](#)
[TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSC1520JH000](#)
[UALSU10VR15019](#) [UALSU9VD070100](#) [36-00037](#) [5701610000](#) [UALW21HS200290](#) [UALW21HS072450](#) [UALSU9HF050500](#)
[UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#) [PE-67531](#) [TLH10UB 113](#)
[OR5](#) [2752045447](#) [CMS3-11-R](#) [7351V](#) [7408-RC](#) [CMF16-153131](#) [744252510](#) [T8116NLT](#) [CMS2-10-R](#) [DLW44SN101SK2L](#) [FE2X10-4-2NL](#)
[744253200](#) [744253101](#) [744252220](#) [TX8111NLT](#) [UAL30VR3500470](#) [CTX01-19077-R](#) [T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#)
[7446630047](#)