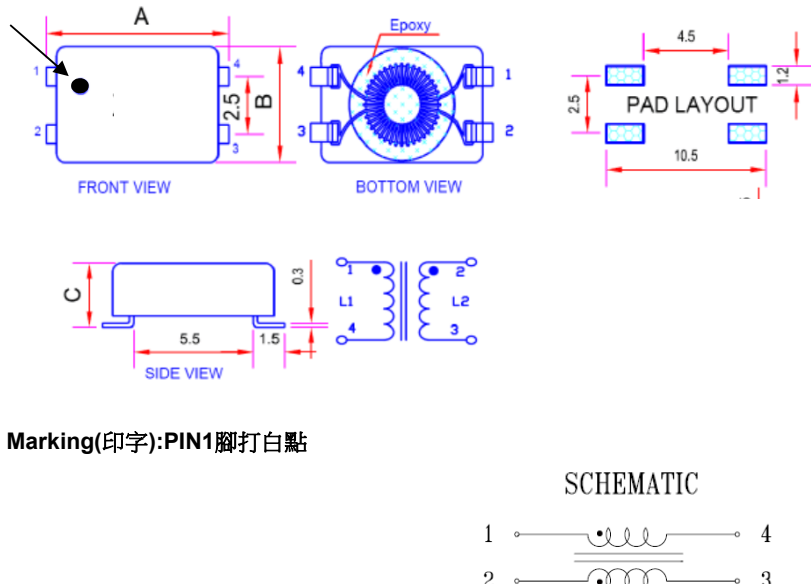



## SPECIFICATION FOR APPROVAL

CUSTOMER		CUST P/N.	
ITEM	Toroidal Coil Inductors	Description	TM391717N-681
PART NO.	302-98528	DATE	2018.07.06

<p><b>(1) DIMENSION(UNIT:mm)</b></p>  <p>Marking(印字):PIN1脚打白點</p> <p style="text-align: center;">SCHEMATIC</p> 		<b>A</b>	9.5(Max)	mm
		<b>B</b>	6.0(Max)	mm
		<b>C</b>	5.0(Max)	mm
		<b>D</b>		mm
		<b>E</b>		mm
		<b>F</b>		mm
		<b>G</b>		mm
		<b>H</b>		mm
		<b>I</b>		mm

(2)ELECTRICAL REQUIREMENTS			(3) TEST INSTRUMENTS	
TEST CONDITION	FREQUENCY	VOLTAGE	LCR-METER:	
				HP-4291A
L1=L2	680uH±35%	1KHz	0.25V	
DCR1=DCR2	120mΩ(Max)	KHz	V	DC RESISTANCE METER:
				V
I <sub>rms</sub>	1.2A(Max)atΔT=40℃(TYP)	KHz	V	CURRENT SOURCE:
				V
HP(L1TOL2)	100V/DC/3mA/1Sec			9073A

**(4)TURN:13TS(REF)**

(5)MATERIAL LIST		
ITEM	MATERIAL	DESCRIPTION
1	CORE	T3.94*1.78*1.78 R15K
2	WIRE	Ø0.15mm(2UEW-H)N
		Ø0.15mm(2UEW-H)R
3	VARNISH	BC-359
4	BASE	UBL023-4

REMARK:	APPROVED	CHECKED	DRAWN BY
	姜杰文	姜法寶	王艷

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [MINGSTAR](#) manufacturer:*

Other Similar products are found below :

[CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#)