


HIGH PASS FILTERS

Designer's Kit K2-HFCN+

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
THE SOLUTION!

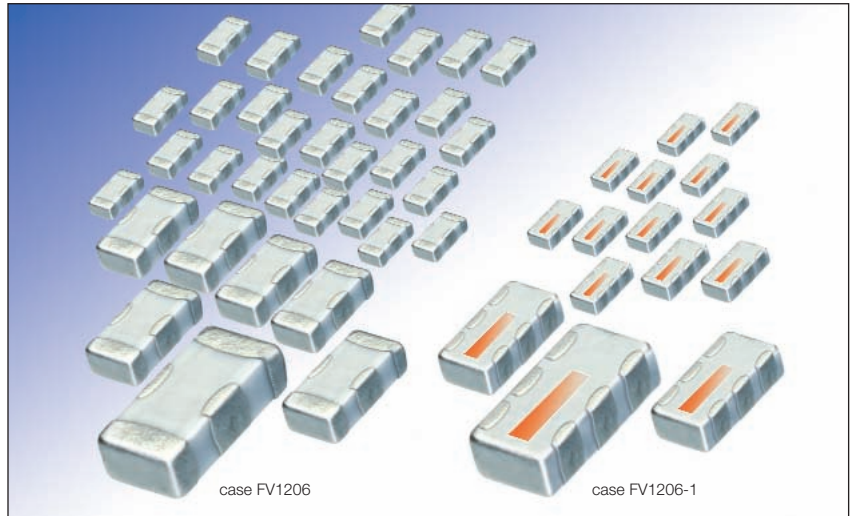

Passband 950 to 13000MHz

HFCN+ Features

- Wideband, 50Ω
- LTCC Low Temperature Co-fired Ceramic
- Small size (L)0.12" x (W)0.06"
- Temperature stable
- Repeatable performance
- Excellent power handling
- Hermetically sealed
- Low cost



All models are
RoHS compliant

Kit K2-HFCN+ Electrical specifications of each model (10 models, 5 of each, 50 total)

Model	Stopband (MHz) Min.		fco, (MHz) Nom. (loss 3dB) Typ.	Passband (MHz)		VSWR Typ.		Power Input* (W) Max.	No. of Sections	Case Style
	(loss > 40dB)	(loss > 20dB)		(loss <1.3dB) Max.	(loss <2dB) Typ.	Stopband	Freq.(MHz) 1.5:1			
HFCN-880+	500	640	880	1060-2500	950-3200	20:1	970-2400	7	7	FV1206
HFCN-1300+	680	930	1300	1510-4000	1400-5000	20:1	1400-4000	7	7	FV1206
HFCN-1320+	910	1060	1320	1700-3800	1400-5000	20:1	1700-3700	7	7	FV1206
HFCN-1600+	1090	1290	1600	1950-4000	1650-5000	20:1	1700-4000	7	7	FV1206
HFCN-1810+	1100	1480	1810	2250-3850	1950-4750	20:1	2250-3750	7	7	FV1206
HFCN-1910+	1075	1400	1910	2200-4400	2000-5200	20:1	2100-4500	7	7	FV1206
HFCN-2100+	1050	1530	2100	2500-5000	2200-6000	20:1	2400-5200	7	7	FV1206
• HFCN-3800+	3100	3200	3800	4500-9000	4250-10000	20:1	3950-10000	7	5	FV1206-1
• HFCN-5500+	4000	4500	5500	6600-11000	6000-11500	20:1	5600-11000	7	5	FV1206-1
• HFCN-8400+	5700	6000	8400	9500-13000	9000-13000	20:1	9000-13000	7	5	FV1206-1

• Patent Pending

* Passband rating, derate linearly to 3W at 100°C ambient



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

RF/IF MICROWAVE COMPONENTS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Development Tools](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[MAAM-011117](#) [MAAP-015036-DIEEV2](#) [EV1HMC1113LP5](#) [EV1HMC6146BLC5A](#) [EV1HMC637ALP5](#) [122410-HMC686LP4E](#) [ADL5363-EVALZ](#) [130437-HMC1010LP4E](#) [EKIT01-HMC1197LP7F](#) [SKYA21001-EVB](#) [SMP1331-085-EVB](#) [EVAL01-HMC1041LC4](#) [MAAL-011111-000SMB](#) [MAAM-009633-001SMB](#) [107712-HMC369LP3](#) [107780-HMC322ALP4](#) [SP000416870](#) [EV1HMC520ALC4](#) [EV1HMC244AG16](#) [EV1HMC539ALP3](#) [124694-HMC742ALP5](#) [SC20ASATEA-8GB-STD](#) [MAX2692EVKIT#](#) [SKY12343-364LF-EVB](#) [108703-HMC452QS16G](#) [119197-HMC658LP2](#) [EV1HMC647ALP6](#) [ADL5725-EVALZ](#) [106815-HMC441LM1](#) [UXN14M9PE](#) [SIMSA868-DKL](#) [SIMSA868C-DKL](#) [SKY65806-636EK1](#) [SKY68020-11EK1](#) [SKY67159-396EK1](#) [SKY66181-11-EK1](#) [SKY65804-696EK1](#) [SKY13396-397LF-EVB](#) [SKY13380-350LF-EVB](#) [SKY13355-374LF-EVB](#) [SKY13322-375LF-EVB](#) [SKY12207-478LF-EVB](#) [SE5023L-EK1](#) [SE5004L-EK1](#) [SE2436L-EK1](#) [Se2435L-EK1](#) [CLA4609-086-EVB](#) [SIMSA915C-DKL](#) [SIMSA915-DKL](#) [SIMSA433C-DKL](#)