

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **1042660110**
Status: **Active**
Overview: Lite-Trap and Mini Lite-Trap Connector System
Description: Bottom-Entry Lite-Trap SMT Wire-to-Board Connector, Push-Button Type, 1 Circuit

Documents:

3D Model	Packaging Specification PK-104266-001-001 (PDF)
Drawing (PDF)	Datasheet (PDF)
3D Model (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-104266-001-001 (PDF)	

Agency Certification

UL E29179

General

Product Family	PCB Receptacles
Series	<u>104266</u>
Application	Wire-to-Board
Overview	<u>Lite-Trap and Mini Lite-Trap Connector System</u>
Product Name	Lite-Trap
UPC	889056499057

Physical

Circuits (Loaded)	1
Circuits (maximum)	1
Color - Resin	Natural
Durability (mating cycles max)	25
Flammability	94V-0
Glow-Wire Capable	No
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	0.450/g
Number of Rows	1
Orientation	Bottom Entry
PCB Retention	None
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	N/A
Plating min - Mating	0.800µm
Polarized to PCB	No
Temperature Range - Operating	-60° to +130°C
Termination Interface: Style	Surface Mount


Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	320V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-104266-001-001
Product Specification	PS-104266-001-001
Sales Drawing	SD-104266-001-001

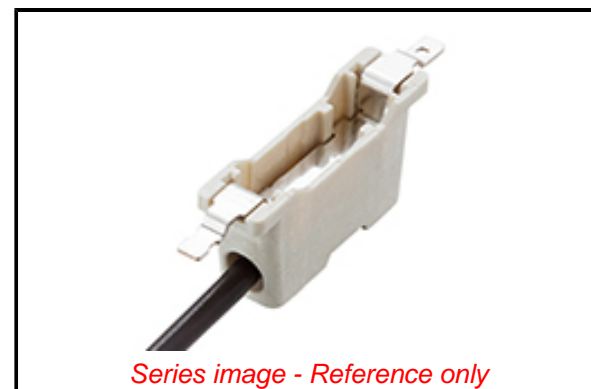

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ECHA_01_2020 (16
January 2020

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

104266 Series

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Lighting Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[293300-7](#) [293660-5](#) [CNX_H03_NTP](#) [30-9767-BU](#) [3605](#) [3-21030-1](#) [ZCH-110-RGB-I](#) [503471-0290](#) [ZCH-110-RGB-J](#) [217-0716-200](#)
[1954563-1](#) [1-293657-2](#) [2834036-1](#) [2834037-1](#) [1-2213222-4](#) [2-2213222-4](#) [2213222-4](#) [2834122-3](#) [2834122-5](#) [2834135-2](#) [FLA-R4142-30](#)
[FLA-R4162-30](#) [FLA-R2142-30](#) [FLA-R2162-30](#) [FLA-R2161-30](#) [FLA-R0161-30](#) [FLA-R0141-30](#) [FLA-R0142-30](#) [FLA-R0162-30](#) [FLA-C00-](#)
[00](#) [DGA00010553](#) [CNXV04NTP](#) [104128-0610](#) [503485-0000 \(Cut Strip\)](#) [503485-0000 \(Loose Piece\)](#) [503485-0000 \(MINI Reel\)](#) [1-2834074-2](#)
[1-2834074-3](#) [1357-AC PLUG W2C \(CHINA\)](#) [1357-AC PLUG W2 \(USA\)](#) [104266-0110](#) [CNXV02NTP](#) [2106212-1](#) [2-2834074-2](#) [104266-](#)
[0210](#) [293470-1](#) [293651-2](#) [293651-4](#) [1-2834006-2](#) [293651-1](#)