

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1054170334](#)  
**Status:** **Active**  
**Overview:** Mega-Fit Power Connectors  
**Description:** Mega-Fit Crimp Terminal, Male, Tin (Sn) Plating, 14 and 16 AWG, Reel

**Documents:**

<a href="#">Drawing (PDF)</a>	<a href="#">Application Specification 768232000-AS-000 (PDF)</a>
<a href="#">Product Specification 1054171000-PS-000 (PDF)</a>	<a href="#">Packaging Specification 1054170100-000 (PDF)</a>
<a href="#">Product Specification 1054171000-PS-CH-000 (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Product Specification 1054171000-PS-KO-000 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Product Specification 1054171000-PS-SPA-000 (PDF)</a>	

**General**

Product Family	Crimp Terminals
Series	<a href="#">105417</a>
Application	Power, Wire-to-Wire
Crimp Quality Equipment	Yes
Overview	<a href="#">Mega-Fit Power Connectors</a>
Product Name	Mega-Fit
UPC	191130081318

**Physical**

Gender	Male
Material - Metal	High Conductivity Copper
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.330/g
Packaging Type	Reel
Plating min - Mating	1.016µm
Plating min - Termination	1.016µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	3.15-3.58mm max.
Wire Size AWG	14, 16
Wire Size mm <sup>2</sup>	1.50-2.50


**Electrical**

Current - Maximum per Contact	26.0A
Voltage - Maximum	600V AC (RMS)/DC

**Material Info**

**Reference - Drawing Numbers**

Application Specification	768232000-AS-000
Packaging Specification	1054170100-000
Product Specification	1054171000-PS-000, 1054171000-PS-CH-000, 1054171000-PS-KO-000, 1054171000-PS-SPA-000
Sales Drawing	1054170100-000

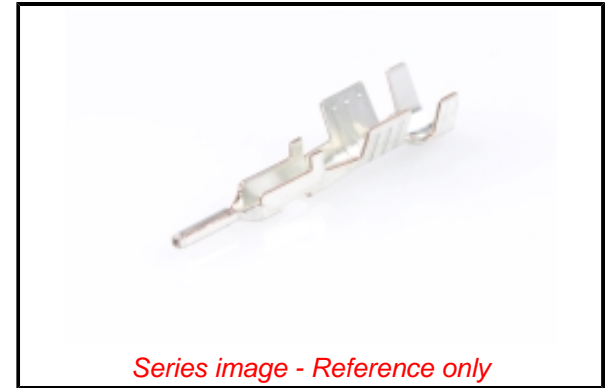

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[105417 Series](#)

**Use With**

Mega-Fit Plug Housing [105411](#) , [213814](#) ,  
[213815](#)

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

**Description**

**Product #**

Extraction Tool for Mega-Fit Crimp Terminals, 14-16 AWG	<a href="#">2002221200</a>
---	----------------------------

Hand Crimp Tool for Mega-Fit Crimp Terminals, 14 AWG, UL1007 and UL1015 Wire	<a href="#">2133091300</a>
--	----------------------------

Hand Crimp Tool 2133091400  
for Mega-Fit Crimp  
Terminals, 16 AWG,  
UL1007 and UL1015  
Wire  
FineAdjust Applicator639043500  
for Mega-Fit Crimp  
Terminals, 14-16  
AWG, UL1015 Wire  
FineAdjust Applicator639043600  
for Mega-Fit Crimp  
Terminals, 14-16  
AWG, UL1007 Wire

This document was generated on 09/07/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)  
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)