

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1200910025](#)
Status: **Active**
Overview: [Brad Nano-Change \(M8\) Products](#)
Description: Nano-Change (M8) Field Attachable Connector, 4 Poles, Straight, Male, Unshielded, Screw Termination, Cable Diameter 3.50-5.00mm

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Field Attachable / Accessories
Series	120091
Approvals	cCSAus certified
IP Rating	IP67
Material - Contact	Brass
Overview	Brad Nano-Change (M8) Products
Product Name	Nano-Change (M8)
Type	Field Attachable Connector
UPC	889056411950

Physical

Cable Diameter	3.50-5.00mm (.138-.197")
Coupling Type	External Thread
Diagnostics / LEDs	No
Diagnostics Port	No
Gender	Male
Keyway	None
Material - Connector Body	PA
Material - Coupling Nut	Zinc Die-Cast, Nickel-Plated
Material - Plating Mating	Gold
Net Weight	8.969/g
Orientation	Straight
Poles	4
Temperature Range - Operating	-40°C to +85°C
Wire Size AWG	20-26

Electrical


Current - Maximum per Contact	4.0A
Voltage - Maximum	30V

Material Info

Engineering Number	N04MA03134
--------------------	------------

Reference - Drawing Numbers

Sales Drawing	1200910025-000
---------------	----------------

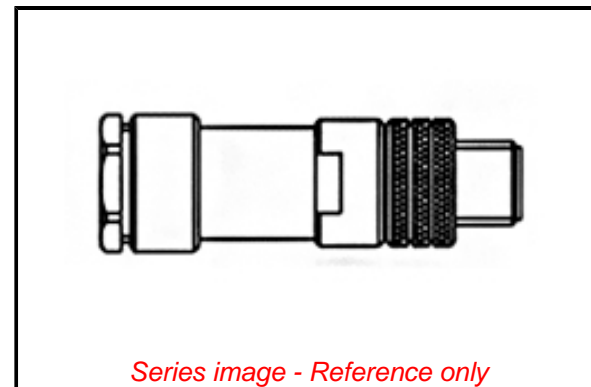

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant with Exemption 6(c)

REACH SVHC

Not Contained Per - ED/21/2016 (20 June 2016)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

50 Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

[120091](#) Series

Mates With

[1200910026](#)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [MA1EAF1200](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R4A00A18M020](#) [8R5000A16M005](#) [1200910008](#) [1200910011](#)
[1300140094](#) [130203-0054](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [8R4006A16M010](#) [8R5006A18A120](#) [1604232](#)
[1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-01016](#) [41-40011](#) [41-40017](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-](#)
[00002](#) [43-01166](#) [41-40005](#) [41-40016](#) [43-00161](#) [43-01191](#) [XS3P-M421-2](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R4006A16A120](#)
[8R4000A16M010](#) [RKC 50/16](#) [1R3004A20A1201](#) [6-22279-3](#) [N03FA03144](#) [1300140077](#) [XS8A-0441](#) [859RD04-103R004](#) [860RD04-113R004](#)
[860RD04-213R004](#) [860-X08-213R004](#) [1-213245-2](#) [2273142-2](#)