

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1200910026](#)  
**Status:** **Active**  
**Overview:** [Brad Nano-Change \(M8\) Products](#)  
**Description:** Nano-Change (M8) Field Attachable Connector, 4 Poles, Straight, Female, Unshielded, Screw Termination, Cable Diameter 3.50-5.00mm

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

Product Family	Field Attachable / Accessories
Series	<a href="#">120091</a>
Approvals	cCSAus certified
IP Rating	IP67
Material - Contact	Brass
Overview	<a href="#">Brad Nano-Change (M8) Products</a>
Product Name	Nano-Change (M8)
Type	Field Attachable Connector
UPC	889056411967

**Physical**

Cable Diameter	3.50-5.00mm (.138-.197")
Coupling Type	Internal Thread
Diagnostics / LEDs	No
Diagnostics Port	No
Gender	Female
Keyway	None
Material - Connector Body	PA
Material - Coupling Nut	Zinc Die-Cast, Nickel-Plated
Material - Plating Mating	Gold
Net Weight	9.000/g
Orientation	Straight
Poles	4
Temperature Range - Operating	-40°C to +85°C
Wire Size AWG	20-26

**Electrical**


Current - Maximum per Contact	4.0A
Voltage - Maximum	30V

**Material Info**

Engineering Number	N04FA03134
--------------------	------------

**Reference - Drawing Numbers**

Sales Drawing	1200910026-000
---------------	----------------

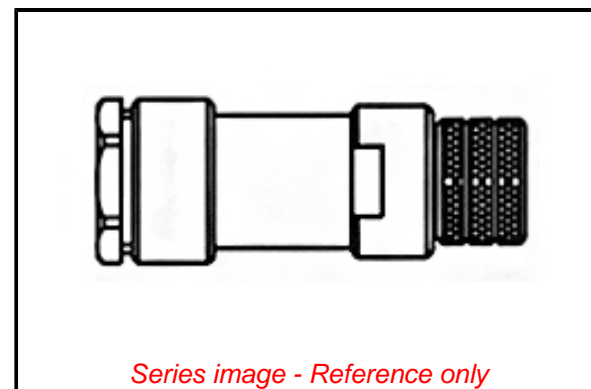

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant with Exemption 6(c)**

**REACH SVHC**

Not Contained Per -ED/01/2018 (15 January 2018)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

50 Image

Not Relevant

Not Contained

**Search Parts in this Series**

[120091 Series](#)

**Mates With**

[1200910025](#)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circular Metric Connectors](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)  
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [1R3006A20M005](#)  
[RF-12P1N8A90DU](#) [41-40011](#) [42-00006](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-01088](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-](#)  
[00343](#) [43-01026](#) [43-01162](#) [43-01173](#) [43-10000](#) [XS3P-M421-2](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R5006A16M020](#)  
[8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-16213](#) [43-01338](#) [XS2RD4265](#) [XS2R-D426-1](#)  
[XS8A-0441](#)