

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1300470037](#)
Status: **Active**
Overview: Brad Micro-Change (M12) Connectors
Description: Micro-Change (M12) PROFINET Field Attachable Connector, 4 Poles, D-Coded, Straight, Female, Shielded, Screw Termination, Cable Diameter 6.00-8.00mm

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Field Attachable / Accessories
Series	130047
Approvals	cCSAus certified
IP Rating	IP67
Material - Contact	Copper Alloy
Overview	Brad Micro-Change (M12) Connectors
Product Name	Micro-Change (M12)
Type	Field Attachable Connector
UPC	889056422055

Physical

Cable Diameter	6.00-8.00mm (.236-.315")
Coupling Type	Internal Thread
Diagnostics / LEDs	No
Diagnostics Port	No
Gender	Female
Keyway	D-coded
Material - Connector Body	Zinc Die-Cast
Material - Coupling Nut	Brass
Material - Plating Mating	Gold
Orientation	Straight
Poles	4
Temperature Range - Operating	-40°C to +85°C
Wire Size AWG	18

Electrical


Current - Maximum per Contact	4.0A
Voltage - Maximum	250V

Material Info

Engineering Number	E1AS00-32
--------------------	-----------

Reference - Drawing Numbers

Sales Drawing	1300470037-000
---------------	----------------

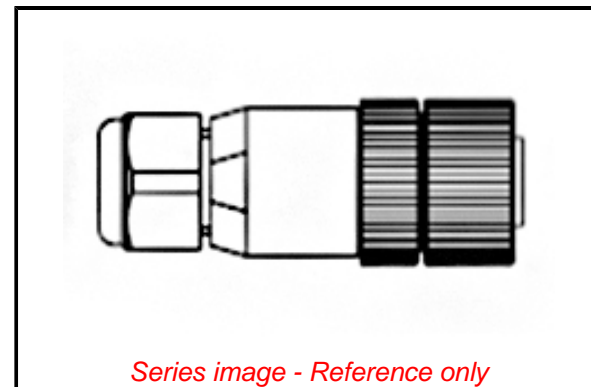

EU ELV

Not Relevant

EU RoHS

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

For more information, please visit [Contact US](#)

China ROHS

Not Reviewed

ELV

Not Relevant

RoHS Phthalates

Not Reviewed

Search Parts in this Series

[130047](#) Series

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[1424048](#) [1021212](#) [600X518037X](#) [6STD09SAM99B70X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [1200910002](#) [1201150041](#) [1203580030](#)
[1200700064](#) [1200700263](#) [1200700416](#) [1200730102](#) [1200770002](#) [1-2823588-2](#) [130203-0054](#) [1300140026](#) [1300150099](#) [1-3637-600-5205](#)
[1545399](#) [1594331](#) [1600413](#) [1612606](#) [1612618](#) [1614660](#) [1A4000-348](#) [CA06EW24-10P-B-03](#) [21036836414](#) [2823064-1](#) [1610759](#) [A1642LK-](#)
[II-T](#) [1R3006A20M005](#) [41-01016](#) [41-40011](#) [41-40017](#) [42-00006](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00002](#) [43-00113](#) [43-00130](#)
[43-01028](#) [43-01034](#) [43-01088](#) [43-01090](#) [43-01203](#) [43-01209](#) [43-01335](#)