

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1302990300](#)  
**Status:** **Active**  
**Overview:** Brad Micro-Change (M12) Connectors  
**Description:** Brad Micro-Change (M12) Harsh-Duty Receptacle, 5 Pole, A-Code, Right-Angle

**Documents:**

[Drawing \(PDF\)](#) [Packaging Specification PK-130299-001-001 \(PDF\)](#)  
[Product Specification PS-130299-001-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

Product Family Industrial Receptacles  
 Series [130299](#)  
 IP Rating IP67  
 Overview [Brad Micro-Change \(M12\) Connectors](#)  
 Product Name Micro-Change (M12)  
 Type PCB Mount  
 UPC 78172513054

**Physical**

Coupling Type Internal Thread  
 Gender Female  
 Keyway A-coded  
 Length N/A  
 Material - Component Nickel-plated Zinc Die-Cast  
 Mounting Thread Size M12 x 1.0  
 Net Weight 321.000/g  
 Orientation 90° Angle  
 Panel Mount Back, Front  
 Poles 5  
 Temperature Range - Operating -40° to +85°C  
 Wire Size AWG N/A  
 Wire/Cable Type N/A


**Electrical**

Current - Maximum per Contact 4.0A  
 Voltage - Maximum 250V AC/DC

**Material Info**

**Reference - Drawing Numbers**

Packaging Specification PK-130299-001-001  
 Product Specification PS-130299-001-001  
 Sales Drawing SD-130299-007-001

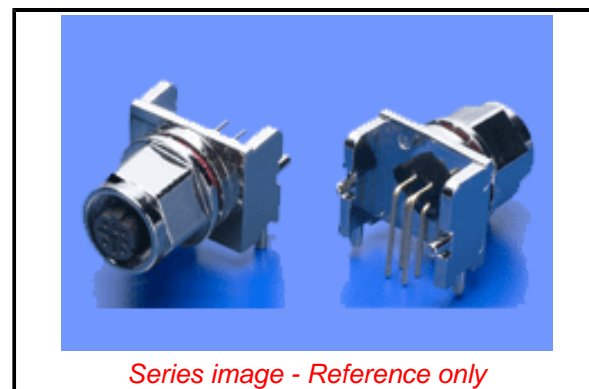

*Series image - Reference only*

**EU ELV**

**Not Reviewed**

**EU RoHS**

**Compliant with Exemption 6(c)**

**REACH SVHC**

Contained Per - D(2020)9139-DC (19 Jan 2021)  
 Dodecachloropentacyclo[12.2.1.16,9.02,13.05,10]o Lead

**Halogen-Free**

**Status**

**Not Relevant**

For more information, please visit [Contact US](#)

China ROHS

Not Relevant

ELV

Not Reviewed

RoHS Phthalates

Not Contained

**Search Parts in this Series**

[130299 Series](#)

**Mates With**

Male A-Code Cable Assembly

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circular Metric Connectors](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)  
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [1R3006A20M005](#)  
[RF-12P1N8A90DU](#) [41-40011](#) [42-00006](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-01088](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-](#)  
[00343](#) [43-01026](#) [43-01162](#) [43-01173](#) [43-10000](#) [XS3P-M421-2](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R5006A16M020](#)  
[8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-16213](#) [43-01338](#) [XS2RD4265](#) [XS2R-D426-1](#)  
[XS8A-0441](#)