



Order-No.	Shell Size / for No. of Contacts	B	C	D	E	∅F1 min - max	max I Rubber bushing	∅F2 Rubber bushing	H	U	V	W
FMK1G-09P-3360	1 / 9	±0.1	±0.3	±0.3	±0.3	3 - 9.5	6.5	FKT1-2	42	±0.4	±0.15	±0.2
FMK2G-15P-3360	2 / 15	25	31.6	39.5	15.2	3 - 8.5	6.5	FKT1-2	43.5	30.8	25	16.9
FMK3G-25P-3360	3 / 25	33.3	40	41	15.2	3 - 8.5	6.5	FKT1-2	47.5	39.1	33.3	25.2
FMK4G-37P-3360	4 / 37	47.04	53.7	45	15.2	3 - 8.5	8	FKT1-2A	50.5	53	47.04	38.9
		63.5	70.2	48	18.2	3 - 12	9	FKT3-4		69.3	63.5	55.3

# FMKYG-xxP-3360

e.g. FMK3G-25P-3360

\*1) Y for hood size 1, 2, 3 or 4

\*2) xx No. of contacts 09, 15, 25 or 37

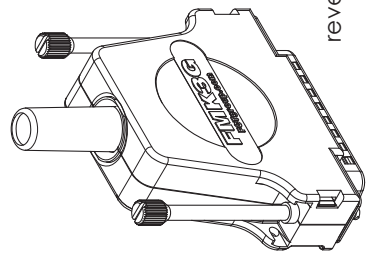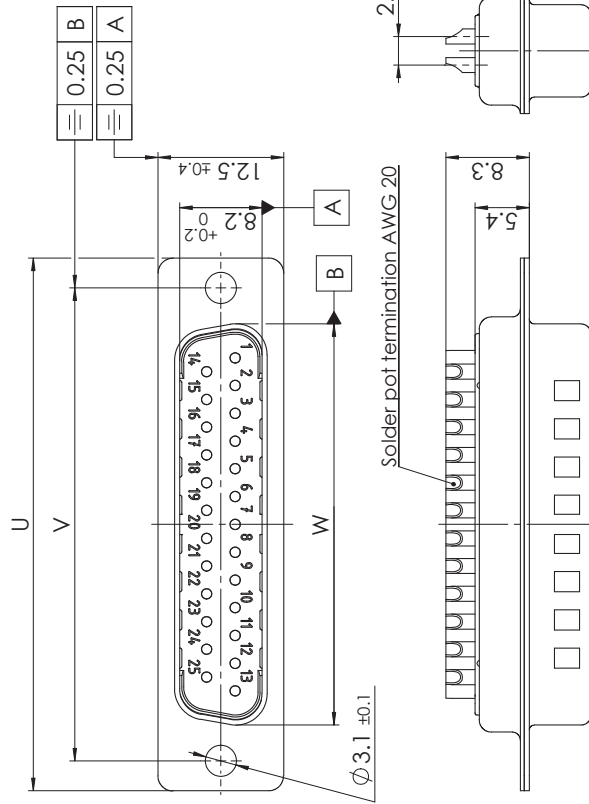


reverse side  
1:1

RoHS compliant

max. torque are 40 Ncm  
FMK1G-09P-3360 without Part-No. 7  
Part-No. 9 not mounted

∅F1 = Cable diameter without rubber bushing  
∅F2 = Cable diameter with rubber bushing

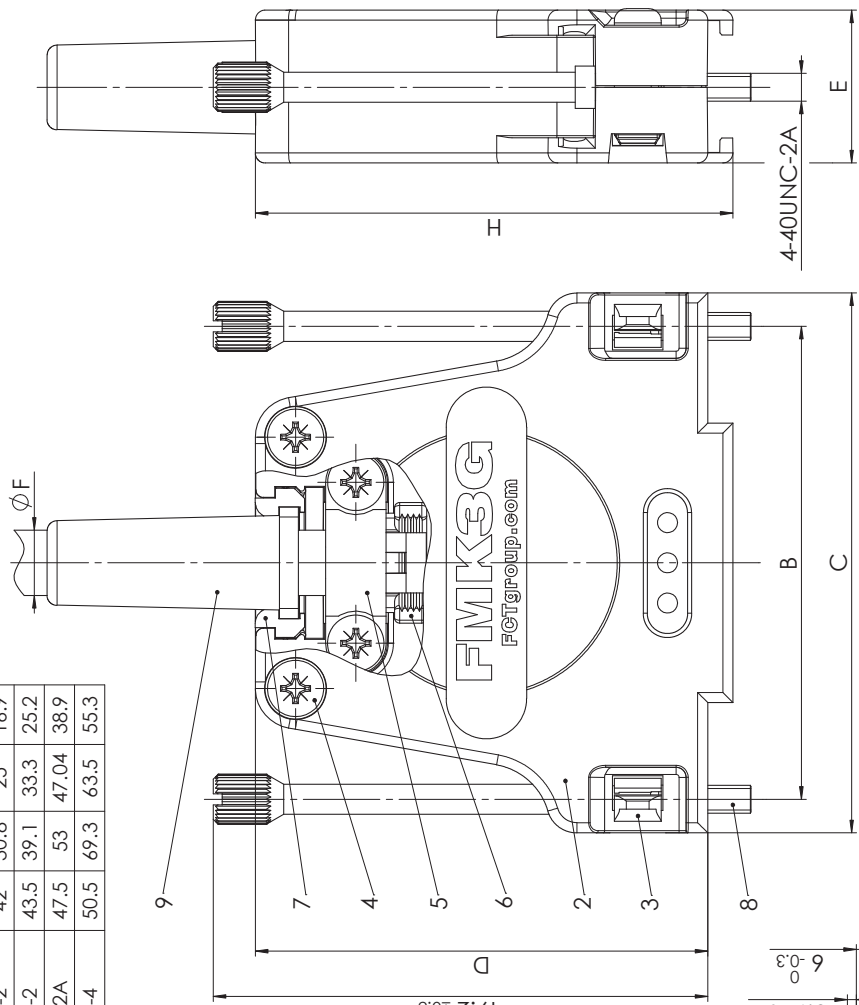

No.	Part	Type	Material
9	1	Rubber bushing	TPE
8	2	Knurled thumb screw	FRS1/5-K190 4-40 / Brass
7	0/2	Cable reduction plate	Zinc die-cast
6	1	Strain relief	ABS
5	1	Cable clamp	Steel
4	4	Screw	Case hardened steel
3	2	Catch spring	PEI
2	1	Hood	FMKYG / Zinc die-cast
1	1	D-Sub Connector	FxxP0G2
No.	St.	Type Description/Material	
		Surface plating/Colour/Class	

DRAWN		CHECKED		SCALE		TITLE	
NAME / DATE	28-03-2007	AMEYENRICHE	08-09-2016	2:1	Hood Connector Set		
REV.	2	DWG. NO.	FMKYG-xxP-3360	DATE	07-09-2016	CH.-NO.	22060
REPLACEMENT FOR:				ORIGINAL: DN A3-DRAWING AS A FILE			
PAGES:				1			

COMMENT: ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING, WITHOUT OUR PRIOR CONSENT. IT MAY NEITHER BE PUBLISHED NOR MADE AVAILABLE TO A THIRD PARTY. AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [D-Sub Adapters & Gender Changers](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[243A11600X](#) [30-9532P](#) [MAP3XAAAH02R262X](#) [500-135](#) [76000670](#) [FCE17-E09AD-250](#) [FCE17-E09AD-290](#) [173114-0099](#) [76000560](#)  
[GCHDLP44M44F](#) [GCLP37M37M](#) [76000702](#) [76000700](#) [GCHDLPF15M15M](#) [GCHDLPF15F15F](#) [76000698](#) [NADB9MF](#) [FCE17-C37AD-290](#)  
[30-9520](#) [P156-000](#) [P152-000](#) [2902318](#) [P150-000](#) [2902317](#) [320X10549X](#) [2902320](#) [230016003](#) [FCC17-A15AD-250](#) [FCC17-C37AD-450](#)  
[2796121](#) [56F705-004-LI](#) [FCE17B25AD2E0](#) [236017003](#) [234017003](#) [2902323](#) [2902326](#) [40-9538F](#) [163A50019X](#) [NADB15FF-B](#) [NADB9FF-](#)  
[B](#) [243A10030X](#) [76000671](#) [16-501373](#) [FCC17-A15AD-280](#) [FCC17-E09AD-210](#) [FCE17-A15AD-250](#) [FCE17-B25AD-210](#) [FCE17-B25AD-](#)  
[250](#) [FCE17B25AD290](#) [FCE17-E09AD-210](#)