


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0451360801](#)
Status: **Active**
Overview: [Mega-Fit Power Connectors](#)
Description: Mega-Fit-to-Mega-Fit Off-the-Shelf (OTS) Cable Assembly, Dual Row, 150.00mm Length, Matte Tin Plated, 8 Circuits, Black

Documents:

3D Model	Datasheet (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
3D Model (PDF)	

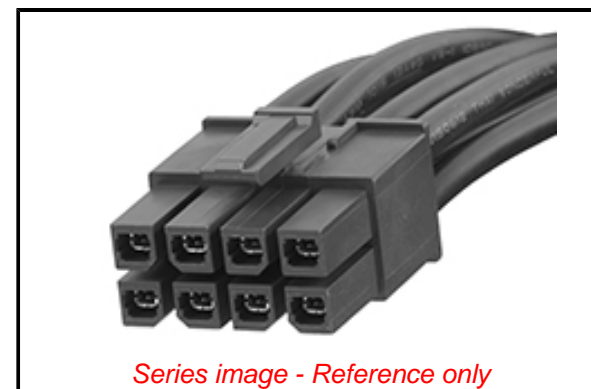

General

Product Family	Cable Assemblies
Series	45136
Application	Power, Wire-to-Board
Assembly Configuration	Dual Ended Connectors
Connector to Connector	Mega-Fit-to-Mega-Fit
Overmolded	No
Overview	Mega-Fit Power Connectors
Product Name	Mega-Fit
Type	Discrete Wire Assembly, High-Power Assembly
UPC	191128777889

Physical

Cable Length	150.00mm
Circuits (Loaded)	8
Color - Resin	Black
Gender	Female-Female
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Matte Tin
Material - Plating Termination	Matte Tin
Material - Resin	Nylon
Net Weight	70.758/g
Number of Rows	2
Packaging Type	Bag
Pitch - Mating Interface	5.70mm
Plating min - Mating	1.524µm
Plating min - Termination	1.524µm
Single Ended	No
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	3.90mm
Wire Size AWG	12
Wire/Cable Type	UL 1015

Electrical

Current - Maximum per Contact	23.0A
Voltage - Maximum	600V

Material Info

Reference - Drawing Numbers

Sales Drawing	451360801-000
---------------	---------------

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[45136 Series](#)

Mates With

Mega-Fit Header [76825](#) , [76829](#)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DC Power Cords](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[172-4000](#) [172-4101](#) [172-7443-E](#) [21033836407](#) [2J-1865A](#) [2R7006A20A120](#) [426055400-3](#) [MN47A4BC01M010](#) [H-OU-2](#) [CA0002](#)
[420680840-3](#) [426451500-3](#) [P162PT4-36](#) [1-832692-4](#) [FJ-VSP 3M](#) [96CB-POWER-B-1.8M2](#) [426040200](#) [CA0006](#) [H-OU-27](#) [1700019464](#) [FJ-](#)
[VSP 10M](#) [MN47B4BC01M040](#) [H-OU-20](#) [2-836917-8](#) [867566-1](#) [804001P03M050G](#) [2050KH1-BK](#) [426013710-3](#) [58257-1069](#) [216603-0037](#)
[1011147](#) [1011324](#) [1012028](#) [862545-5](#) [BXC-10567](#) [172-2555](#) [32102-022800-200-RS](#) [P29000-M2](#) [P29004-M2](#) [DC.CAB.0201.0150](#)
[DC.CAB.0301.0150](#) [DC.CAB.0610.0150](#) [DC.CAB.0700.0150](#) [DC.CAB.1000.0150](#) [DC.CAB.1000.0300](#) [DC.CAB.1100.0150](#)
[DC.CAB.1400.0150](#) [DC.CAB.1410.0150](#) [DC.CAB.1500.0150](#) [DC.CAB.1811.0150](#)