


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0462355001](#)  
**Status:** **Active**  
**Overview:** [Micro-Fit Connector System](#)  
**Description:** Micro-Fit RMF High Mating Cycle, Reduced Mating Force, Crimp Terminal, Female, with 0.38µm Selective Gold (Au) over Nickel (Ni), 20-24 AWG, with Lubricant

**Documents:**

<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary TS-46235-501-001 (PDF)</a>
<a href="#">Product Specification PS-46235-001-001 (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Packaging Specification PK-46235-001-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Test Summary TS-46235-001-001 (PDF)</a>	

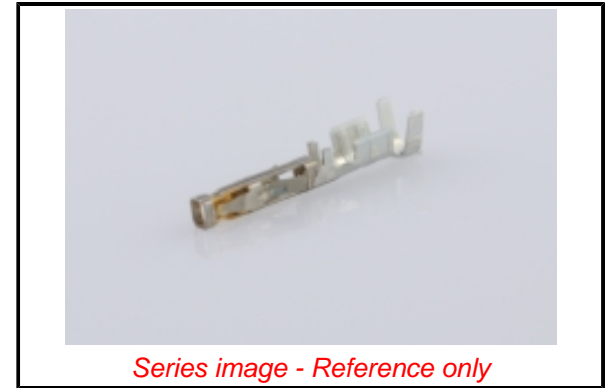

**General**

Product Family	Crimp Terminals
Series	46235
Application	Power, Wire-to-Board, Wire-to-Wire
Comments	90% increase in mating cycles (250 cycles) and up to 50% reduction in mating force
Crimp Quality Equipment	Yes
Overview	<a href="#">Micro-Fit Connector System</a>
Product Name	Micro-Fit RMF
UPC	883906382377

**Physical**

Durability (mating cycles max)	250
Gender	Female
Material - Metal	Copper-Zinc-Tin
Material - Plating Mating	Gold
Material - Plating Termination	Nickel
Net Weight	0.046/g
Packaging Type	Reel
Plating min - Mating	0.381µm
Plating min - Termination	1.270µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.85mm max.
Wire Size AWG	20, 22, 24
Wire Size mm <sup>2</sup>	N/A

**Electrical**

Current - Maximum per Contact	5.0A
-------------------------------	------

**Material Info**

**Reference - Drawing Numbers**

Packaging Specification	PK-46235-001-001
Product Specification	PS-46235-001-001
Sales Drawing	SD-46235-001-001
Test Summary	TS-46235-001-001, TS-46235-501-001

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[46235 Series](#)

**Mates With**

Micro-Fit 3.0 Male Crimp Terminals [43031](#)

**Use With**

Micro-Fit 3.0 Receptacle Housings [43025](#), [43645](#). Micro-Fit BMI Panel Mount Receptacle Housings [44133](#). Micro-Fit TPA Receptacle Housing [172952](#)

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

**Description**

**Product #**

Extraction Tool for [11030043](#)

Micro-Fit Terminals

PremiumGrade Hand[638192900](#)

Crimp Tool for Low

Force Micro-Fit 3.0

Terminals, 20-30  
AWG  
FineAdjust Applicator 639046500  
for Low-Force  
Micro-Fit 3.0  
Terminals, for 20-24  
AWG Wire with  
Insulation Diameter  
1.30-1.85mm  
T2 Terminator 639101400  
Tooling to be used  
with Low Force  
Crimp Terminals,  
20-24 AWG Wire

This document was generated on 01/26/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)