

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1200710044](#)  
**Status:** **Active**  
**Overview:** Brad Micro-Change (M12) Connectors  
**Description:** Micro-Change (M12) Single Keyway with PG7 Cable Fitting, 90° Angle Female, 5 Poles, Cable Diameter 3.30-6.60mm

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

CSA LR6837

**General**

Product Family Field Attachable / Accessories  
 Series [120071](#)  
 Approvals cCSAus certified  
 IP Rating IP67  
 Material - Contact Brass  
 Overview [Brad Micro-Change \(M12\) Connectors](#)  
 Product Name Micro-Change (M12)  
 Type Field Attachable Connector  
 UPC 78172553186

**Physical**

Cable Diameter 3.30-6.60mm (.130-.260")  
 Coupling Type Internal Thread  
 Diagnostics / LEDs No  
 Diagnostics Port No  
 Gender Female  
 Keyway Single  
 Material - Connector Body PA  
 Material - Coupling Nut Nickel-plated Brass  
 Material - Plating Mating Silver  
 Net Weight 29.937/g  
 Orientation 90° Angle  
 Poles 5  
 Temperature Range - Operating -25°C to +90°C  
 Wire Size AWG 18

**Electrical**


Current - Maximum per Contact 4.0A  
 Voltage - Maximum 30V AC / 36V DC

**Material Info**

Engineering Number 8A5001-31

**Reference - Drawing Numbers**

Sales Drawing SD-120071-010

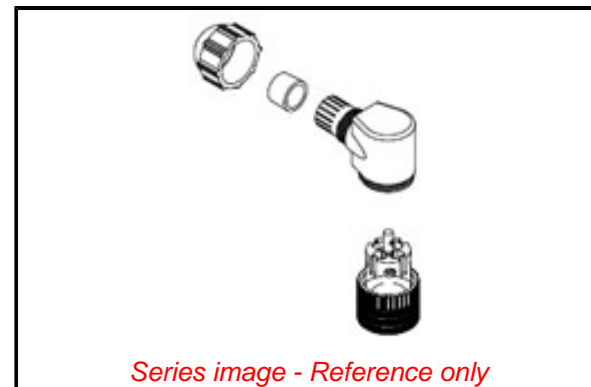

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant with Exemption 6(c)**

**REACH SVHC**

Contained Per - ECHA\_01\_2020 (16 January 2020)

Lead

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

50 Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

**Search Parts in this Series**

[120071 Series](#)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Molex manufacturer:](#)*

Other Similar products are found below :

[1201140065](#) [90814-0008](#) [38210-0105](#) [60506-C-50](#) [69008-0971](#) [73108](#) [79516-1043](#) [72903](#) [2002181200](#) [0982660216](#) [68301-1017](#)  
[03-12-1016](#) [71506-C](#) [90835-0003](#) [02-09-8104](#) [880504](#) [67490-3220](#) [53254-0710](#) [70984-4008](#) [03-12-2022](#) [89674-0805](#) [514412093](#)  
[0151340501](#) [54596-1010](#) [0191310031](#) [503308-4410](#) [02-09-6102](#) [0039000218](#) [89762-1582](#) [0011404526](#) [00136](#) [0022173102](#) [0026615060](#)  
[CR4006A30M003](#) [0039532085](#) [58098-0628](#) [0003092041](#) [0008520123](#) [0011030025](#) [0011184017](#) [0022162060](#) [0039302050](#) [0194180018](#)  
[01312](#) [M15730061](#) [61432](#) [6150300002](#) [CS63W64](#) [CS8264N](#) [CS8365N](#)