

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1300280023](#)
Status: **Active**
Overview: [DeviceNet Solutions](#)
Description: Micro-Change (M12) Double-Ended Cordset, 5 Poles, Male (Straight) to Female (Straight), 22 AWG, DeviceNet Thin Stranded Cable, 0.50m (1.64') Length

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR6837
 UL E152210

General

Product Family Industrial Cordsets
 Series [130028](#)
 Connector End A Micro-Change (M12)
 Connector End B Micro-Change (M12)
 IP Rating IP67
 Material - Contact Copper Alloy
 Overview [DeviceNet Solutions](#)
 Product Name DeviceNet, Micro-Change (M12)
 Protocol N/A
 Region Europe
 Type Double Ended
 UPC 78678801123

Physical

Cable Diameter 7.24mm (.285")
 Cable Length 0.50m (1.64')
 Color - Cable Jacket Gray
 Coupling Style Threaded
 Gender Female-Male
 Keyway Single
 LED Indicator No
 Material - Cable Jacket PVC
 Material - Connector Body PVC
 Material - Coupling Nut Die-Cast Zinc
 Material - Plating Mating Gold
 Net Weight 70.623/g
 Orientation Straight to Straight
 Poles 5
 Temperature Range - Operating -20°C to +80°C
 Wire Size AWG 22
 Wire/Cable Type Shielded-Twisted Pair

Electrical


Current - Maximum per Contact 4.0A
 Voltage - Maximum 250V AC/DC

Material Info

Engineering Number DND22A-M005

Reference - Drawing Numbers

Sales Drawing SD-130028-001

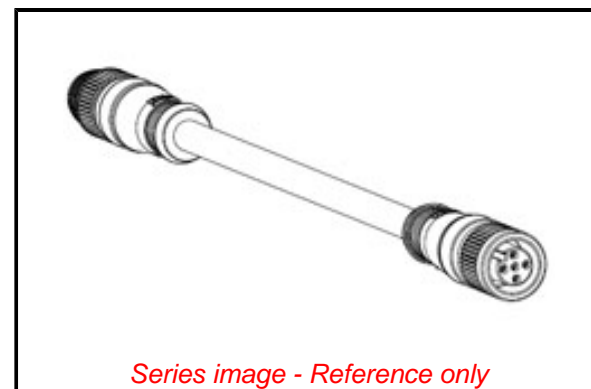

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 ECHA_01_2020 (16
 January 2020

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[130028 Series](#)

This document was generated on 02/17/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Molex manufacturer:](#)

Other Similar products are found below :

[1201140065](#) [90814-0008](#) [38210-0105](#) [60506-C-50](#) [69008-0971](#) [73108](#) [79516-1043](#) [72903](#) [2002181200](#) [0982660216](#) [68301-1017](#)
[03-12-1016](#) [71506-C](#) [90835-0003](#) [02-09-8104](#) [880504](#) [67490-3220](#) [53254-0710](#) [85071-0017](#) [70984-4008](#) [03-12-2022](#) [89674-0805](#)
[514412093](#) [0151340501](#) [54596-1010](#) [0191310031](#) [503308-4410](#) [02-09-6102](#) [0039000218](#) [89762-1582](#) [0011404526](#) [00136](#) [0022173102](#)
[0026615060](#) [CR4006A30M003](#) [0039532085](#) [58098-0628](#) [0003092041](#) [0008520123](#) [0011030025](#) [0011184017](#) [0022162060](#) [0039302050](#)
[0194180018](#) [01312](#) [M15730061](#) [61432](#) [6150300002](#) [CS63W64](#) [CS8264N](#)