


MTC 21000 SERIES – 250VAC, 0.3A to 3.6A,

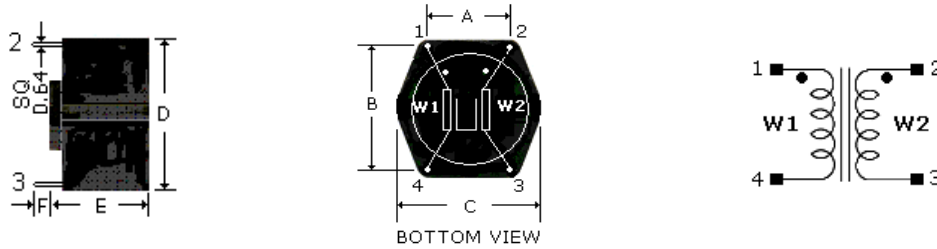

Unit: mm A: 10.0 B: 15.0 C: 18.0max D: 18max E: 12.0 F: 5+-1

PART NUMBER Horizontal Type	Inductance @10KHz 50mV Per winding	R DC per winding mOhm typical value	Rated Current (A)
MTC21001-E	400uH	15	3.6
MTC21002-E	820uH	36	2.6
MTC21003-E	1.0mH	62	2
MTC21004-E	1.5mH	90	1.5
MTC21005-E	2.7mH	151	1.5
MTC21006-E	3.3mH	170	1.5
MTC21007-E	3.9mH	230	1.3
MTC21008-E	4.7mH	258	1.2
MTC21009-E	5.6mH	276	1.2
MTC21009-02-E	6.0mH	220	1.5
MTC21010-01-E	6.8mH	290	1.2
MTC21010-E	6.8mH	380	1.0
MTC21011-E	10mH	547	0.7
MTC21011-01-E	10mH	250	0.7
MTC21012-E	15mH	670	0.6
MTC21013-E	27mH	1150	0.4
MTC21013-01-E	27mH	750	0.5
MTC21014-E	33mH	1350	0.4
MTC21015-E	39mH	1550	0.4
MTC21016-E	39mH	2000	0.4
MTC21017-E	47mH	1560	0.4
MTC21018-E	56mH	2450	0.3
MTC21019-E	68mH	2650	0.3

*** MTC210XX-XX-E last code "-E" : RoHS compliant, *Customer's specifications are welcome.**

Rated Inductance : measured at 25°C and 10KHz 50mV
 Tolerance: + 50 - 30%
 DC resistance: at 25°C
 Testing voltage 1500V,50Hz ,2 sec,(winding - winding)
 Over temperature of winding < 55°C
 Operating temperature range - 40°C ~ +125°C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Motocraft](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)