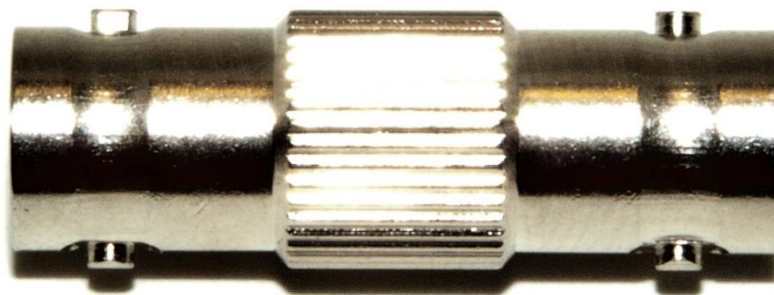


BU-P3283**(Adapter: BNC Female to Female)**

- The BU-P3283 is a female to female BNC adapter.
- Overall length 1.32" (33.5mm), OD = 0.49" (12.5mm)
- Material:

| | |
|----------------|----------------------------------|
| Body | Brass, tarnish-resistant plating |
| Center contact | Gold-plated beryllium copper |
| Dielectric | PTFE |
- Ratings:

| | |
|-------------|--|
| Impedance | 50 Ohms |
| Voltage | 30 VAC/60 VDC Max shield/earth 500VRMS inner conductor/shield |
| Temperature | -70°C to 170°C |
- RoHS 3 compliant

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Adapters - In Series](#) category:

Click to view products by [Mueller](#) manufacturer:

Other Similar products are found below :

[5916-1103-603](#) [5918-1103-000](#) [5919-1503-000](#) [651A505](#) [82-5552](#) [9030-9523-502](#) [A0407000](#) [R114703000W](#) [R125704000](#) [R125771001](#)
[R141710000W](#) [R141723161](#) [R141730000](#) [R143730700](#) [R143770000](#) [R161703000W](#) [R161730000](#) [R161753000W](#) [R161791530W](#)
[R201705000](#) [R222705200](#) [R222M40010W](#) [R316754000](#) [R405006000](#) [R443162000](#) [AD78TL](#) [HRM-513S](#) [1996352-2](#) [2157155-1](#) [252169-75](#)
[AD158](#) [2101130-1](#) [252186](#) [R114704000W](#) [R114720000W](#) [R125705001](#) [R125705701](#) [R125771000](#) [R125771001W](#) [R125791501W](#)
[R127704001](#) [R127.870.001](#) [R127872001](#) [R141717000](#) [R142710000](#) [R142723000](#) [R143703000](#) [R143704000](#) [R143705700](#) [R143710000](#)