


BU-P3846

(BNC Female to Female Adapter, Panel Mount)

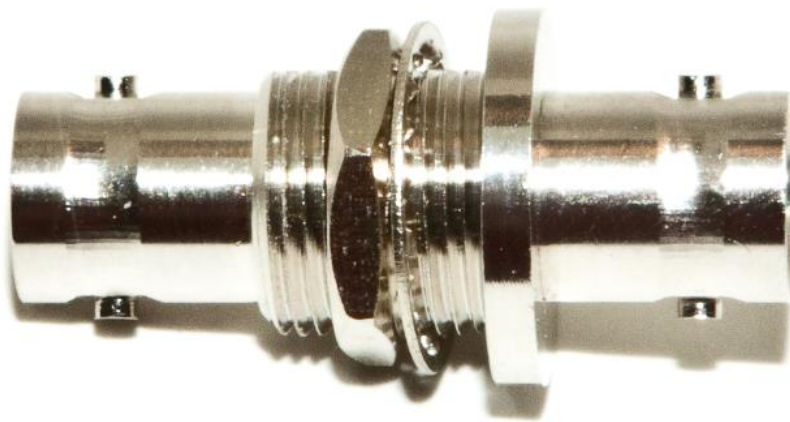

- Mueller's BU-P3846 is a female-female BNC adapter that mounts in panels up to 0.175" (4.45mm) thick.
- Recommended panel mounting hole is $\varnothing 0.50$ " (12.7mm).
- Material:

Body	Brass
Center contact	Gold-plated beryllium copper
Dielectric	PTFE
- Rating:

Voltage	Shield/contact, 500 VRMS Max.
Temperature	-65°C (-85°F) to 165°C (329°F)
Impedance	50 Ohms
- RoHS 3 compliant, exemption 6c

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Adapters - In Series](#) category:

Click to view products by [Mueller](#) manufacturer:

Other Similar products are found below :

[5916-1103-603](#) [5918-1103-000](#) [5919-1503-000](#) [651A505](#) [82-5552](#) [9030-9523-502](#) [A0407000](#) [R114703000W](#) [R125704000](#) [R125771001](#)
[R141710000W](#) [R141723161](#) [R141730000](#) [R143730700](#) [R143770000](#) [R161703000W](#) [R161753000W](#) [R161791530W](#) [R201705000](#)
[R222705200](#) [R222M40010W](#) [R316754000](#) [R405006000](#) [R443162000](#) [AD78TL](#) [HRM-513S](#) [1996352-2](#) [2157155-1](#) [252169-75](#) [AD158](#)
[2101130-1](#) [252186](#) [R114704000W](#) [R114720000W](#) [R125705001](#) [R125705701](#) [R125771000](#) [R125771001W](#) [R125791501W](#) [R127704001](#)
[R127.870.001](#) [R127872001](#) [R141717000](#) [R142710000](#) [R142723000](#) [R143703000](#) [R143704000](#) [R143705700](#) [R161715000W](#) [R161771000W](#)