


RoHS COMPLIANT

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	INITIAL DESIGN	2008/09/10	<i>Kevin H. Hsu</i>

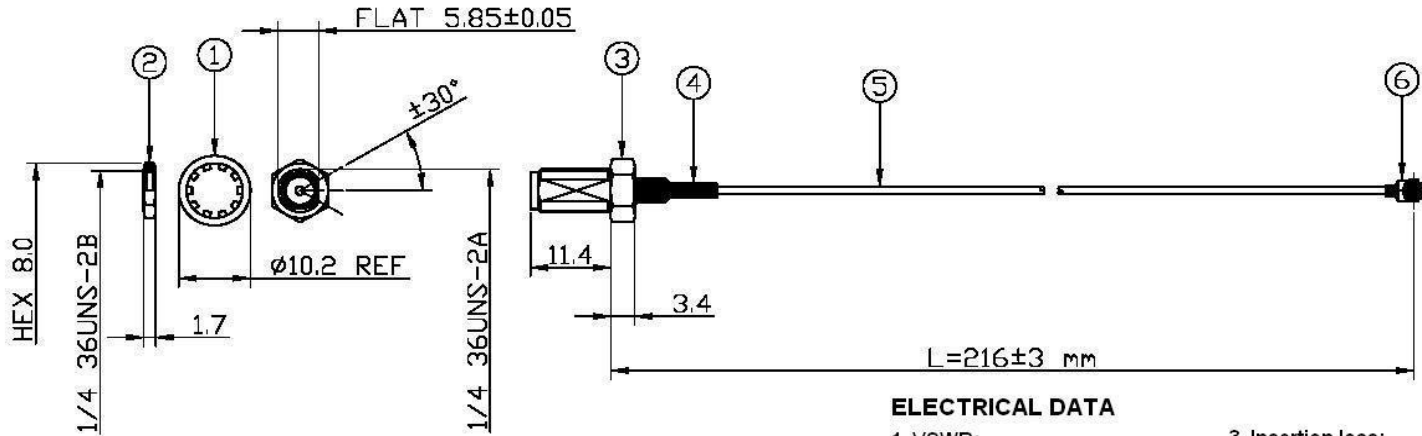

ELECTRICAL DATA

1. VSWR:	900MHz : 1.0758	3. Insertion loss:	900MHz : -.4934dB
	1.8GHz : 1.1069		1.8GHz : -.6824dB
	2.4GHz : 1.1508		2.4GHz : -.7853dB
	3.0GHz : 1.1197		3.0GHz : -.8740dB
2. Return loss:	900MHz : -.28.752dB	4. Impedance:	50 ohm
	1.8GHz : -.25.886dB		
	2.4GHz : -.23.061dB		
	3.0GHz : -.24.948dB		

Note: 1) THE ORENTATION SHOULD BE SAME AS SHOW.
 2) WASHER AND NUT SHOULD BE BULK PACKED SEPERATE FROM CABLE ASSEMBLY.

bec Bobbintron Electrical Corp.
 www.bobbintron.com

TITLE SMA bulk Jack + 1.13L216 + I-PEX			
DWG NO. 080910-03	CUSTOMER P/N 45009575L	UNIT mm	REV. 1
GENERAL TOLERANCES X NA XX NA XXX NA ANGLES NA		SCALE 1 : 1	APPROVALS
(UNLESS OTHERWISE SPECIFIED)		SIZE A4	DATE
			DRAWN BY: <i>Kevin H. Hsu</i> 2008/09/10
		SHEET 1 of 1	CHKD BY: <i>Kevin</i> 2008/09/10
			APPD BY: <i>Jared</i> 2008/09/10

NO	DESCRIPTION	Q'TY	DRAWN NO.
06	I-PEX MHF Plug	1	20278-111R-13
05	1.13-MIT coaxial cable (Gray)	1	
04	Heatshrink	1	
03	SMA ST bulk Jack	1	
02	Nut	1	
01	Washer	1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Multitech](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#)
[24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [25P203C25P2-](#)
[003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#)
[CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-](#)
[11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#) [PCX-](#)
[18-50](#) [Minibend-9](#) [Minibend-4](#) [BNC TO SMA Cable](#) [MIKROE-274](#) [Minibend-10](#)