


# Monolithic Ceramic Capacitors (High Frequency Type)

## ERB21B5C2E1R5CDX1□ (0805, C0G, 1.5pF, 250Vdc)

□: packaging code

- For your new designs, alternative parts should be used. These parts should be used only for existing design. Please consult with us for details.

RoHS regulation conformity parts

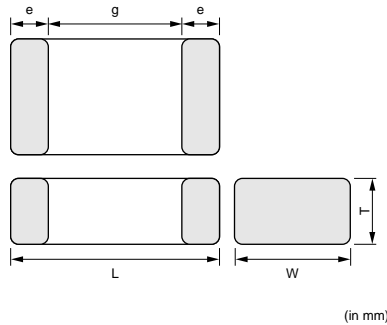

### ■ Dimensions

Length L	2.0mm±0.3mm
Width W	1.25mm±0.3mm
Thickness T	1.35mm+0mm
Electrode e	0.25mm min.
Electrode Gap g (min.)	0.7mm

### ■ Packaging

Code	Packaging	Minimum Quantity
L	180mm Embossed Tape	3000
K	330mm Embossed Tape	10000
B	Bulk(Bag)	1000

### ■ Rated Value

	Murata PN Code	Spec
Temperature Char.	5C	C0G (EIA), 0±30ppm/°C
Capacitance	1R5	1.5pF
Capacitance Tol.	C	±0.25pF
Rated Voltage	2E	250Vdc

### ■ Specifications

Please refer to 'ERB Series Specification and Test Methods' PDF file.

- This data sheet is applied for CHIP MONOLITHIC CERAMIC CAPACITOR used for General Electronics equipment for your design.

#### <Notice>

- Solderability of Tin plating termination chip might be deteriorated when low temperature soldering profile where peak solder temperature is below the Tin melting point is used. Please confirm the solderability of Tin plating termination chip before use.
- Use of Sn-Zn based solder will deteriorate reliability of MLCC. Please check with our sales representatives for the use of Sn-Zn based solder in advance.

- The RoHS compliance means that we judge from EU Directive 2002/95/EC the products do not contain lead, cadmium, mercury, hexavalent chromium, PBB and PBDE, except exemptions stated in EU Directive 2002/95/EC annex and impurities existing in natural world.
- This statement does not insure the compliance of any of the listed parts with any laws or legal imperatives developed by any EU members individually with regards to the RoHS Directive.

#### ⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Murata manufacturer](#):*

Other Similar products are found below :

[CSTCE20M0V53-R0](#) [DEA1X3F150JP3A](#) [NTPAA2R2LDNB0](#) [CSTCE16M0V53-R0](#) [GQM2195C1H470JB01D](#) [LQH3NPN1R0MM0L](#)  
[GRM188R71E473KA01D](#) [DLW5BTN501SQ2L](#) [GRM31CR70J106KA01L](#) [GRM155C80J105KE15D](#) [GRM188R71C103KA01D](#)  
[GRM21BR61H225KA73L](#) [MGJ2D051515SC](#) [82224C](#) [82473C](#) [GCJ31CR71H105KA12L](#) [GRM2165C1H101FA01D](#)  
[GRM55D7U3A103JW31L](#) [PTGL09AS2R2K3B51B0](#) [11R683C](#) [1217AS-H-1R5N=P3](#) [DD1274AS-H-220M=P3](#) [1422604C](#) [1447440C](#)  
[BPM15-120-Q12P-C](#) [NMK1212SC](#) [NMV1212DAC](#) [NXFT15XH103FA2B090](#) [LQH43MN330J03L](#) [GCM31CR71C106KA64K](#)  
[GRM033R71E122KA01D](#) [GRM1885C1H150FA01J](#) [GRM3195C2A471JD01D](#) [GRM55DR72E684KW01L](#) [RF1211C](#) [RF1238](#)  
[MGJ2D121509SC](#) [MGJ6D122005LMC-R7](#) [#B953AS-330M=P3](#) [HN-214](#) [HN-214X](#) [TZ03P450](#) [UEE-12/12.5-D48NB-C](#) [LBWB1ZZYDZ-](#)  
[DTEMP-SNIC-UART-A](#) [LLM315R70J225MA11L](#) [46334C](#) [DMS-40LCD-420S-C](#) [DR4103](#) [NCS3S4815SC](#) [NKE1212DC](#)