



Preliminary Specification of COAXIAL CONNECTOR

Preliminary SPEC No. : NMM04-PT0003D

Part Number : MXHQ87PK3000

Written by T. Yui

Checked by T. Kuriyama

Date 15 /May./2012

SPECIFICATION


Revised A: 28/May./'13 KT,B:17/Mar./'14,C:20/Mar./'14TT,D:10/Jun./'16,

1. MECHANICAL

>A>B>C

Manual measurement probe for MM8830-2600.

MM126714 and MM126712 are used as calibration adapter.

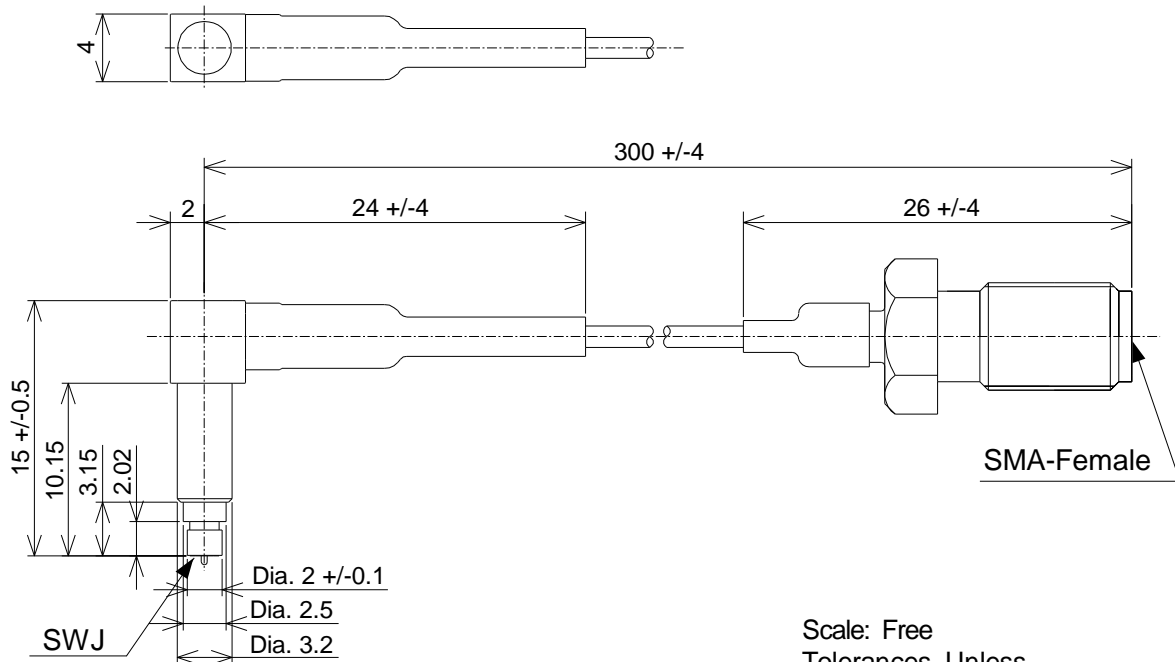

Scale: Free
Tolerances Unless
Otherwise Specified: +/-0.2
Unit: mm

2. RATING:

Item	Specification
Voltage Rating	30Vr.m.s. maximum
Nominal Frequency Range	DC to 6GHz
Nominal Impedance	50Ω
Temperature Rating	-40°C to +85°C
Insulation Resistance	500 MΩ minimum
Withstanding Voltage	No evidence of break down in AC200Vr.m.s, 1minute
Initial Contact Resistance (without conductor resistance)	70mΩ max.
A> Voltage Standing Wave Ratio (V.S.W.R.)	1.8max. (DC~3GHz) 2.1max. (3~6GHz)
A> Insertion loss	1.4dB max.(DC~3GHz) 2.4dB max. (3~6GHz)
A> Durability	2K cycles
A> Engage and disengage force. (PROBE side only)	a. Engagement 30N maximum b. Disengagement 5N minimum 20N maximum

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Murata](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#)
[24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-](#)
[50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [RF179-74BJ3-](#)
[77RP1-0305](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [MXHT83QE3000](#) [CCNTN2-MM-LL335-26](#)
[73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#)
[R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#)