


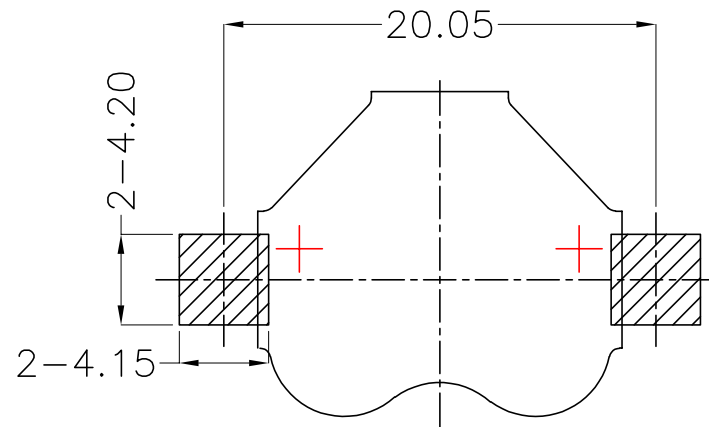


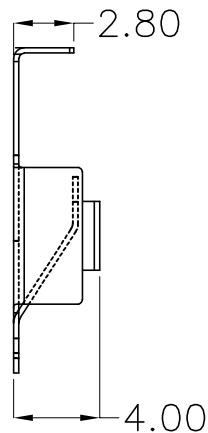

REV.	ECN NO.	REVISED	DATE

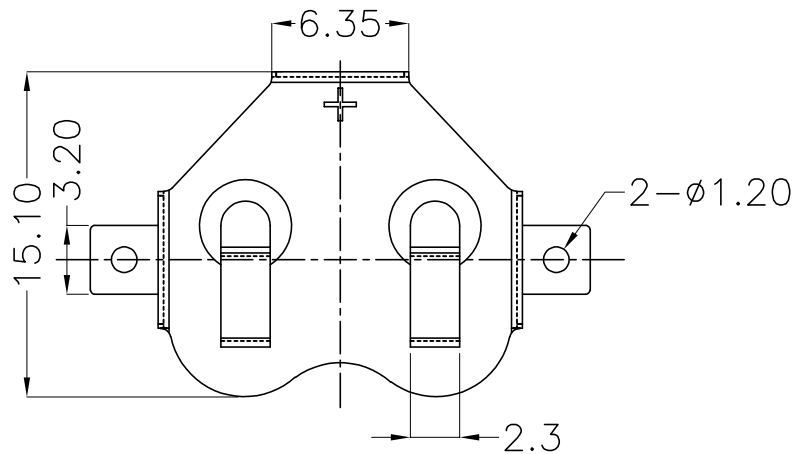


PCB Layout Diagram
Top View

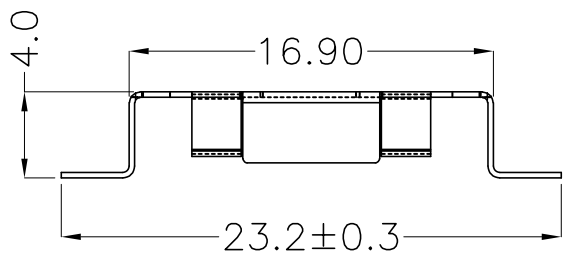


工程部
2024-01-12
LQ. HUANG

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美用 www.meiyangdz.com			
DECIMALS: X :±0.30 X.X :±0.25 X.XX :±0.20 X.XXX :±0.10	ANGLES: X :±1° X.X :±0.5°	DSND	HuangLieQing	DATE	2024-01-12
WEIGHT:		CHKD	ZhouRuicai	DATE	2024-01-12
SHEET 1 OF 2		APVD	XueShunyong	DATE	2024-01-12
		SCALE: 1:1	SIZE:	VIEW:	TITLE: 电池扣CR1632-W SMT 卷装
		UNIT: mm	REV.: A/0	OBJECT: MY	PART NO.: MY-1632-03-R
					DRAW NO.:MY-CP-0247

1	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.25mm	Ni-Plating
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR



产品

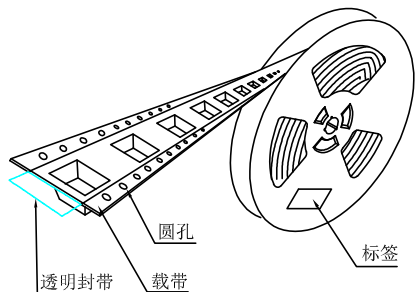


圆孔


透明封带

载带

标签

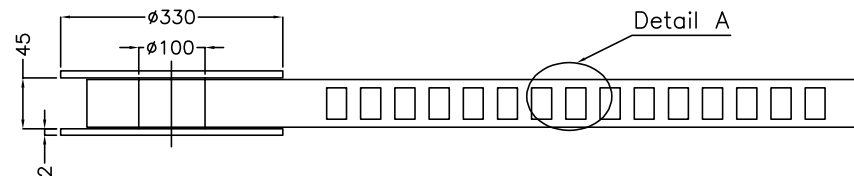

Detail A


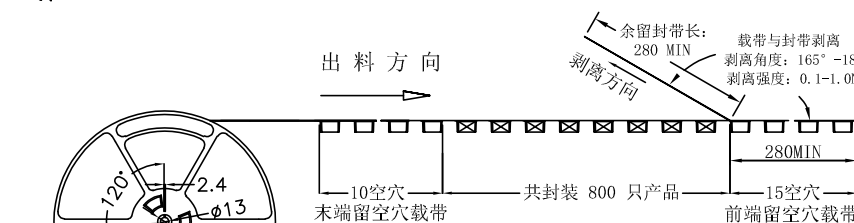


出料方向

余留封带长: 280 MIN
载带与封带剥离
剥离角度: 165° -180°
剥离强度: 0.1-1.0N


末端留空穴载带

共封装 800 只产品
15空穴
前端留空穴载带




标签朝上



6盘



塑料袋



外箱

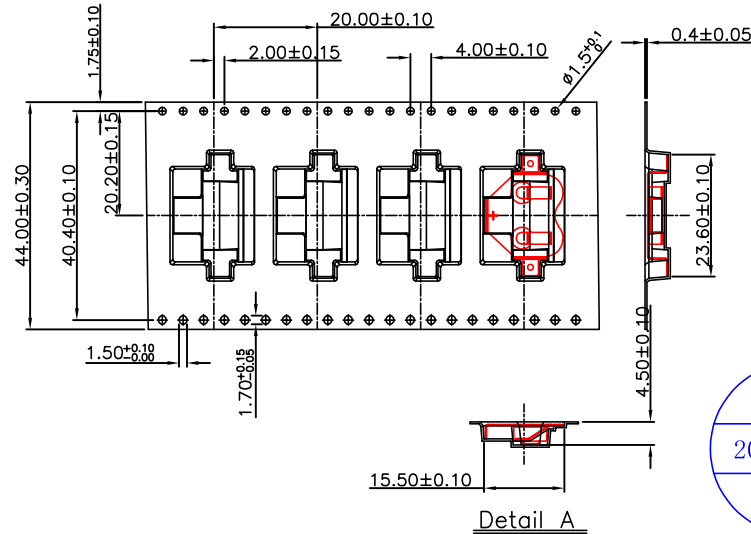

Detail A



技术要求:

- 圆孔十个孔距离累计允许公差为±0.2mm
- 带长250mm内容许弯曲度1mm
- 材料厚度以在载带边缘测量为准
- 所有尺寸定义依循EIA-481-C系准则定义之
- 材料: 黑色PS T=0.4mm
- 所有卷轮为灰蓝挖空旋转塑胶卷轮
- 整模成型长度: 16.5M,
- 非指明公差范围为: ±0.1mm; 超过250mm 不计算累计误差
- 型腔外形凡未标明处倒角R为0.2-0.3; 拔模斜度未标注的为3° 以下

包装信息:

- 每卷盘装产品 800 只, 卷盘外侧贴相关标签;
- 每 6 卷盘放在一个塑料袋中;
- 每外箱装6盘, 产品总数: 4800 只;
- 外箱上下用胶纸封成"工"字;
- 电池扣包材CR1632-W SMT 卷装(MY-1632-W-01-R)

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美阳 www.meiyangdz.com			
DECIMALS: X.X : ±*** X.XX : ±*** X.XXX : ±***	ANGLES: X : ±*** X.X : ±***	DSND	WangHeng	DATE	2024-01-13
		CHKD	ZhouRuicai	DATE	2024-01-13
		APVD	XueShun Yong	DATE	2024-01-13
WEIGHT:		SCALE:	SIZE: A4	VIEW:	
SHEET 2 OF 2		UNIT: mm	REV.: A/0	OBJECT: MY	
		TITLE:		电池扣CR1632-W SMT 卷装	
		PART NO.:		MY-1632-03-R	
		DRAW NO.:		MY-BD-0042	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Coin Cell Battery Holders](#) category:

Click to view products by [MYOUNG](#) manufacturer:

Other Similar products are found below :

[PDSN-11-D](#) [799-2007](#) [BH44AAB](#) [BH48DL](#) [BH8000](#) [MY-2430-01-R](#) [BS-16-B4AA006-R](#) [KH-CR1220-2](#) [BH-18650-A1AJ006](#) [BS-02-A1BK007](#) [BH-18650-A1AJ005](#) [BS-12-B3AA009-R](#) [BS-02-A1AK010-X](#) [BS-02-A1AJ010](#) [BS-03-A1AJ001](#) [MY-FJ-131-J-R](#) [MY-FJ-04-J-R](#) [BS-08-B2AA025](#) [BS-24-A1AJ017](#) [BH-18650-A5BJ001-2D](#) [BS-12-A1AJ002-Z](#) [BS-08-B2AA032](#) [MY-2032-04-R](#) [BS-12-B3AA011-R](#) [BS-621-B4AA001-R](#) [MY-ZJ-110](#) [MY-FJ-127-R](#) [BS-06-B4AA002-R](#) [MY-1220-04](#) [BH-AAA-A1AJ001](#) [BS-12-B3AA003-T](#) [MY-FJ-115II-R](#) [BS-06-B4AK001-R](#) [BH-18650-B1BA007](#) [MY-FJ-115II](#) [BH-AAA-B5AA001](#) [BE-13-017](#) [MY-2477-01](#) [BS-12-B3AA013](#) [BC-25-5PD-300](#) [BS-08-B2AA016-R](#) [MY-AAA-22-J](#) [MY-AA-14-J](#) [MY-AAA-24-J](#) [MY-2032-28](#) [BS-06-A4BK016](#) [MY-FJ-01](#) [MY-1025-01](#) [MY-AA-5355-J](#) [BS-05-A1BJ018](#)