

ON SHINE G.P.S. Antenna ANT-555

GPS ACTIVE ANTENNA



Features

- High gain and low noise figure
- With high rejection saw filter
- Include protection circuits for ESD
- Ultra low power consumption
- Excellent Temperature Stability
- Magnetic Mount Base
- Varied cable length and connectors are available

Application

- Car navigation system
- A.V.L tracking system

Specifications

Patch Antenna


Type	
Frequency	1575.42MHz +/-1.023MHz
Ground Plane	70x70mm
Bandwidth(at10dB return loss)	10MHz min
Gain at Zenith	+5.0dBi typ
Axial Ratio	3.0 dB max
VSWR	1.5 dB max
Impedance	50
Operating Temperature	-40 ~+85

LNA Performance

Type	
System Gain without cable	27 dB typ @3.0V(+25)
Noise Figure	1.2 dB typ (+25)
Output VSWR	2.0 dB max
SAW FILTER	Fo = 1575.42 MHz
Out of band rejection	Fo ± 50 MHz 40db typical
Voltage	2.7V~3.3V
Current Consumption	8 mA typ.
Operating Temperature	-40 ~+85

Others


Type	
Dimension	L: 46.5mmW:46.5mm H:14mm
Waterproof	100% waterproof
Plastic color	Black
Cable type	RG-174
Cable Length	2m , 3m , 5m
Connector Type	SMA & Others
Mounting Method	Magnet

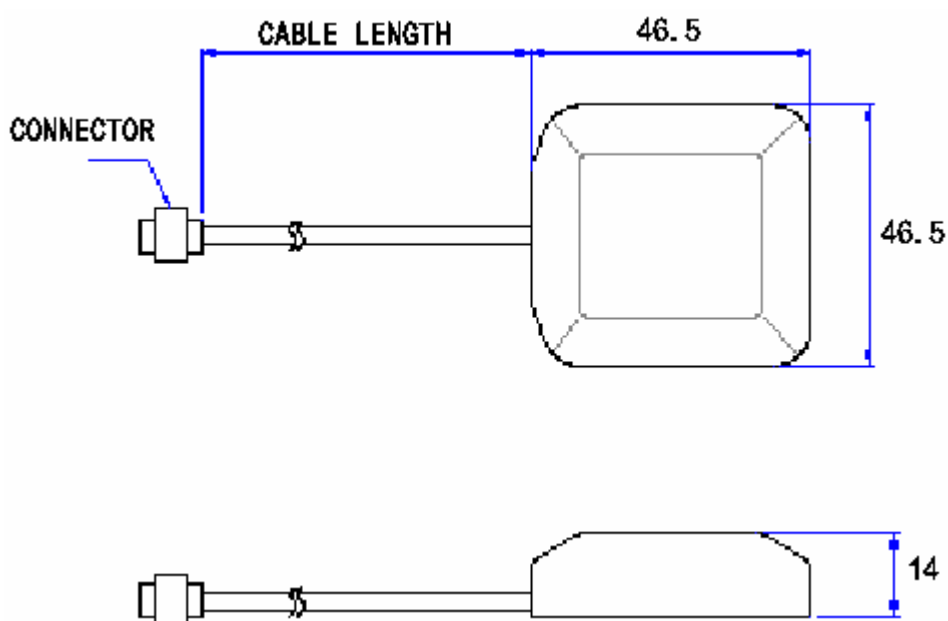


Response

Base on RG-174 5meters, SMA


S21

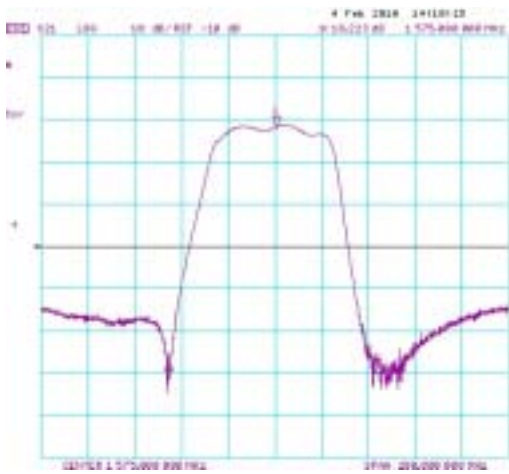


Wind Band

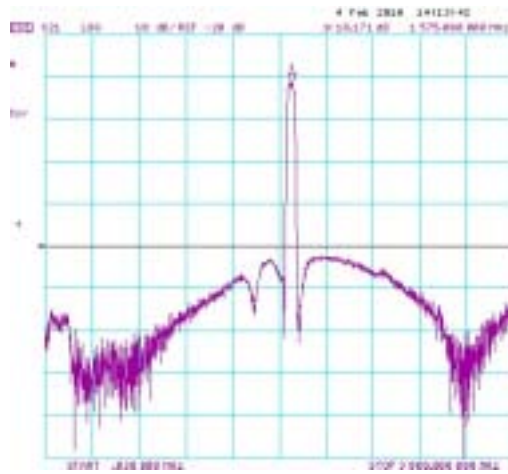


S22

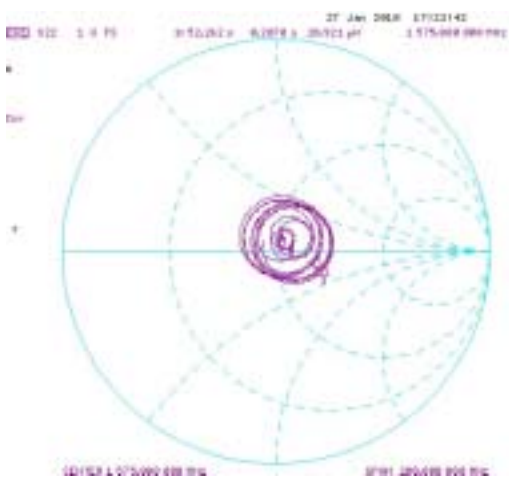


S22

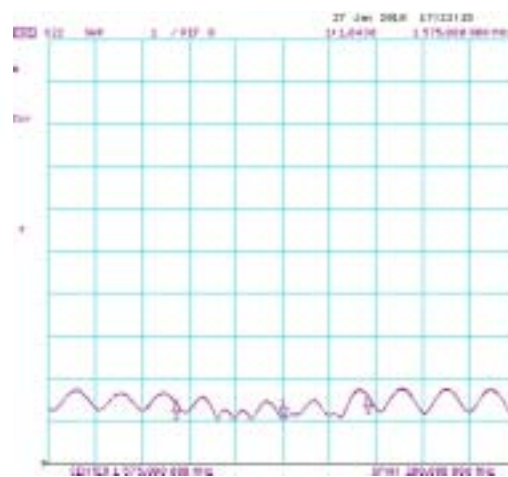

ESD TEST

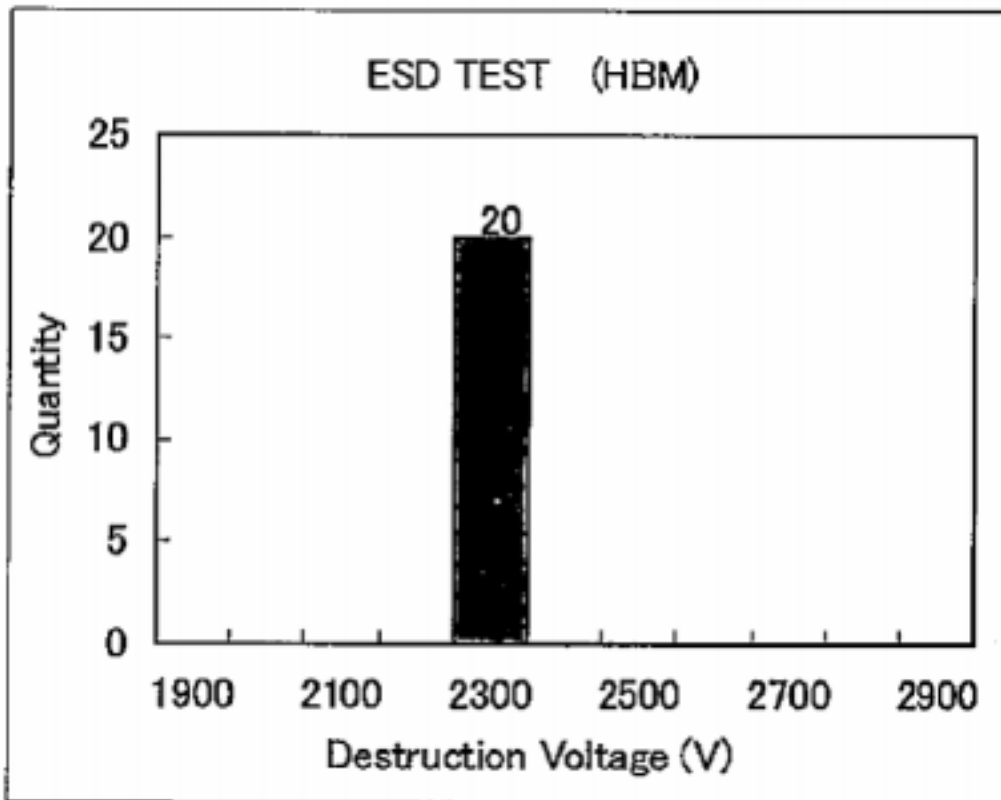

Noise Figure TEST

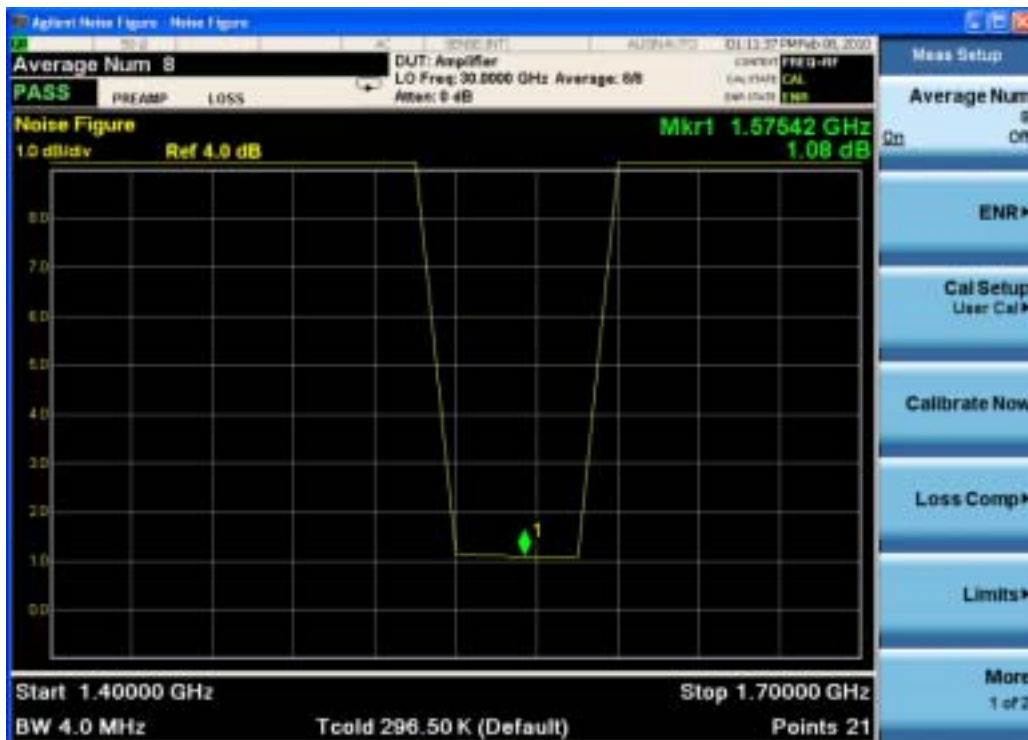

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [NetBurner](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [W3006VP](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [EXB144SM](#) [C37](#) [MAF94051](#) [GD35-17P-NF](#) [P1744](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#)