


Outline

Standard

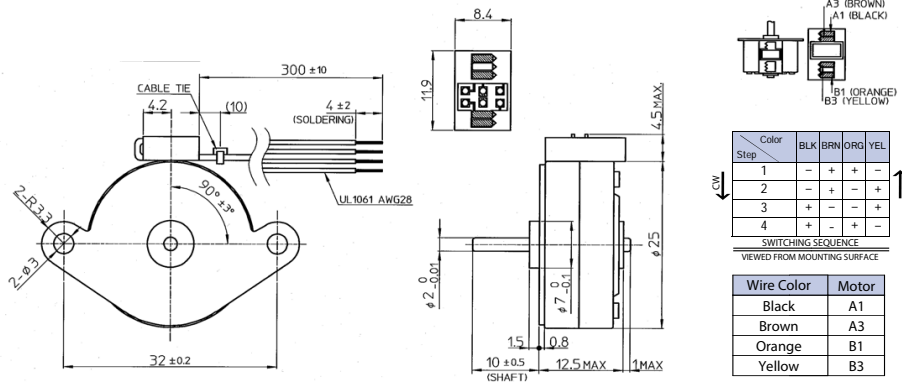

PM


*Please contact our sales for inventory and lot information. Specification may be changed without notice.

Specifications

Model	Drive Method	Drive Mode	Drive Voltage	Surge/Current	Coil Resistance	Drive IC
PM25S-048-HHC4	2-2 Phase	Bipolar Chopper	24 [V]	/600 [mA]/Phase (Peak)	16 [Ω]	UDN2917EB

Magnet Material	Stator Material	Shaft Length	Wire Length	Wire Holder	Front Plate	Electrical
MS70A	SUY/SPC (Ni)	10mm	300mm fly lead (no connector)	90 deg. Right	FPH	24V, 600mA Bipolar Constant Current 16 ohms, MS70A

Torque/Speed Characteristics

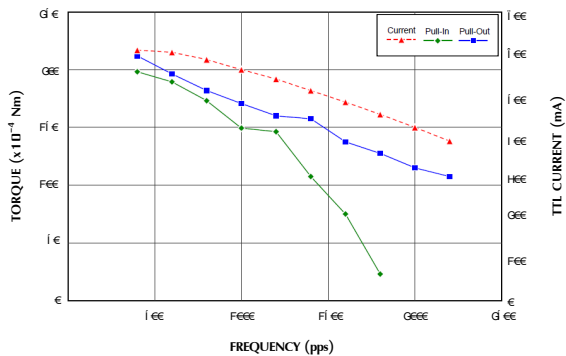

Frequency (pps)	400	600	800	1000	1200	1400	1600	1800	2000	2200
Pull-Out (x10 ⁻⁴ Nm)	211.8	196.1	181.4	170.6	159.9	156.9	137.3	127.5	114.7	106.9
Pull-In (x10 ⁻⁴ Nm)	198.1	189.3	172.6	149.1	146.1	106.9	74.5	22.6		
Current (mA)	607	602	584	560	537	509	480	450	419	386

(TTL Current = Over all current drawn by the driver)

*pps = Hz

Markings

Japan

NMB-MAT PM25S-048-HHC4
JAPAN H9804

Thailand

NMB-MAT PM25S-048-HHC4
THAILAND TA9804

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Stepper Motors](#) category:

Click to view products by [NMB Technologies](#) manufacturer:

Other Similar products are found below :

[HT17-275](#) [5014-020](#) [HT17-271D](#) [HT23-596](#) [HT23-597](#) [82924041](#) [82924036](#) [82924049](#) [82914016](#) [HT08-221](#) [STEPPER MOTOR WITH 28CM LEAD SCREW](#) [MS11HS3P4067-09RL](#) [ML23HS8P4150-09RL](#) [MS17HD6P4200-24RL](#) [MS11HS5P4150-13RL](#) [MS08HY1P4050-09RL](#) [MS08HY3P4050-02RL](#) [ML24HCAL3550-01RL](#) [MS17HD6P4100-16RL](#) [ML23HS8P4220-16RL](#) [MS17HD2P4200-20RL](#) [ML23HSAL4500-E](#) [ML23HS4P4150-06RL](#) [MS14HS5P4100-03RL](#) [MS17HD2P4100-27RL](#) [MS14HS1P4100-09RL](#) [ML34HD2L8500-01RL](#) [MS11HS1P4100-25RL](#) [ML23HSAP4150-04RL](#) [ML23HSAP4300-18RL](#) [ML23HS4P4100-02RL](#) [PL23HS8L4550-05RL](#) [PL23HSAL4500-05RL](#) [MS17HD4P4150-22RL](#) [HT23-598D-ZAA](#) [82930002](#) [HT34-504](#) [PD57-2-1378-TMCL](#) [HT17-268D-CAA](#) [103H8223-5141](#) [103H7126-5840](#) [SANYO MINIATURE STEPPER MOTOR](#) [STEPPER MOTOR BIPOLAR 42X38MM 2.8V 1.7A](#) [SY20STH30-0604A](#) [STEPPER MOTOR: UNIPOLAR/BIPOLAR 57Å—56MM](#) [PM25S-048-HHC4](#) [NSANYO PANCAKE STEPPER MOTOR: BIPOLAR 42×](#) [SP2563-5160](#) [FIT0278](#) [FIT0349](#)