



ELECTRONICS, INC.

44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinc.com>

NTE2636 Silicon NPN Transistor Horizontal Deflection ^w/Internal Damper Diode

Features:

- High Breakdown Voltage: $V_{CES} = 1500V$
- Built-In Damper Diode
- Isolated TO3PFM Type Package

Applications:


- TV/Character Display Horizontal Deflection Output

Absolute Maximum Ratings: ($T_A = +25^\circ C$ unless otherwise specified)

Collector–Emitter Voltage, V_{CES}	1500V
Emitter–Base Voltage, V_{EBO}	6V
Collector Current, I_C	8A
Collector Peak Current, $I_{C(peak)}$	9A
Collector Surge Current, $I_{C(surge)}$	18A
Collector–Emitter Diode Forward Current, I_D	8A
Collector Power Dissipation ($T_C = +25^\circ C$), P_C	50W
Operating Junction Temperature, T_J	+150°C
Storage Temperature Range, T_{stg}	-55° to +150°C

Electrical Characteristics: ($T_A = +25^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Emitter–Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 500mA, I_C = 0$	6	–	–	V
Collector Cutoff Current	I_{CES}	$V_{CE} = 1500V, R_{BE} = 0$	–	–	500	μA
DC Current Transfer Ratio	h_{FE}	$V_{CE} = 5V, I_C = 1A$	–	–	25	
Collector–Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 6A, I_B = 1.2A$	–	–	5	V
Base–Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 6A, I_B = 1.2A$	–	–	1.5	V
Collector–Emitter Diode Forward Voltage	V_{ECF}	$I_F = 8A$	–	–	2.0	V
Fall Time	t_f	$I_{CP} = 6A, I_{B1} = 1.2A, I_{B2} \cong -2.4A,$ $f_H = 31.5kHz$	–	–	0.5	μs

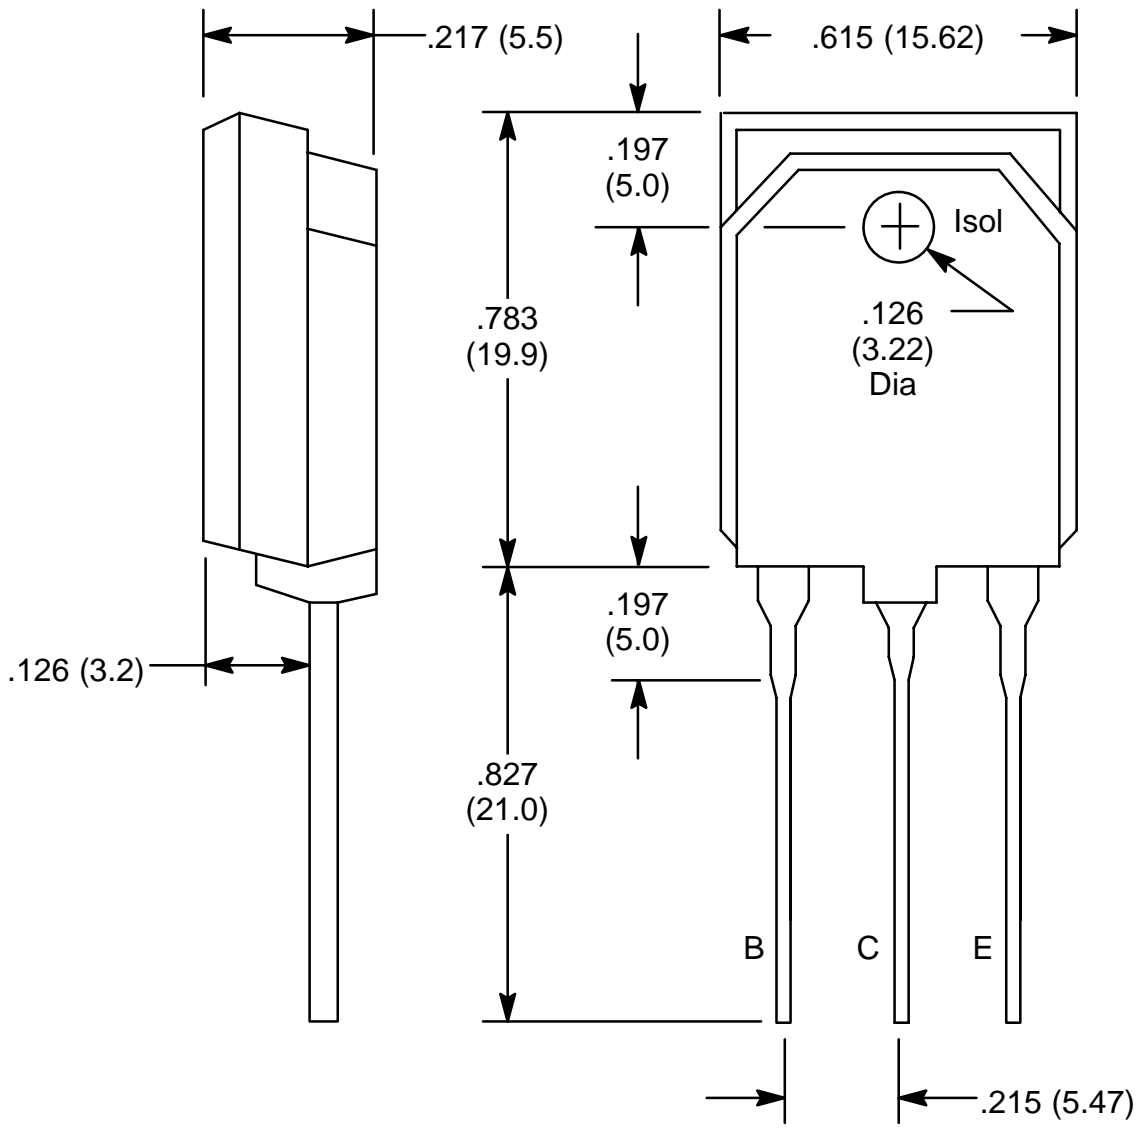

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)