



ELECTRONICS, INC.  
 44 FARRAND STREET  
 BLOOMFIELD, NJ 07003  
 (973) 748-5089  
<http://www.nteinc.com>



**NTE2688**  
**Silicon NPN Transistor**  
**Fast Switching for High Frequency Inverter**  
**TO220 Type Package**

**Features:**

- Collector–Emitter Sustaining Voltage:  $V_{CE(sus)} = 450V$  Min
- Fast Switching Speed
- Low Saturation Voltage

**Applications:**


- Switching Regulators
- High Frequency Inverters
- General Purpose Power Amplifiers

**Absolute Maximum Ratings:** ( $T_A = +25^\circ C$  unless otherwise specified)

Collector–Base Voltage, $V_{CBO}$ .....	600V
Collector–Emitter Voltage, $V_{CEO}$ .....	450V
Collector–Emitter Voltage ( $V_{EB} = 5V$ ), $V_{CEX}$ .....	600V
Emitter–Base Voltage, $V_{EBO}$ .....	7V
Collector Current, $I_C$	
Continuous .....	8A
Peak .....	16A
Base Current, $I_B$	
Continuous .....	4A
Peak .....	8A
Total Power Dissipation ( $T_C = +25^\circ C$ ), $P_D$ .....	60W
Operating Junction Temperature, $T_J$ .....	+150°C
Storage Temperature Range, $T_{stg}$ .....	-55° to +150°C
Thermal Resistance, Junction–to–Case, $R_{thJC}$ .....	2.08°C/W

**Electrical Characteristic:** ( $T_C = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Emitter Sustaining Voltage	$V_{CEO(sus)}$	$I_C = 0.2A, I_B = 0A$	450	-	-	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 4A, I_B = 0.8A$	-	-	1.0	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 4A, I_B = 0.8A$	-	-	1.5	V
Collector Cutoff Current	$I_{CBO}$	At rated voltage	-	-	100	A
	$I_{CEO}$	At rated voltage	-	-	100	A
Emitter Cutoff Current	$I_{EBO}$	At rated voltage	-	-	100	A
DC Current Gain	$h_{FE}$	$I_C = 4A, V_{CE} = 5V$	10	-	-	
		$I_C = 1mA, V_{CE} = 5V$	5	-	-	
Current Gain - Bandwidth Product	$f_T$	$I_C = 0.8A, V_{CE} = 10V$	-	20	-	MHz
Turn-On Time	$t_{on}$	$I_C = 4A, I_{B1} = 0.8A, I_{B2} = -1.6A,$ $R_L = 37.5^\circ, V_{BB2} = 4V$	-	-	0.5	s
Turn-Off Time	$t_{off}$		-	-	2.0	s
Fall Time	$t_f$		-	-	0.2	s

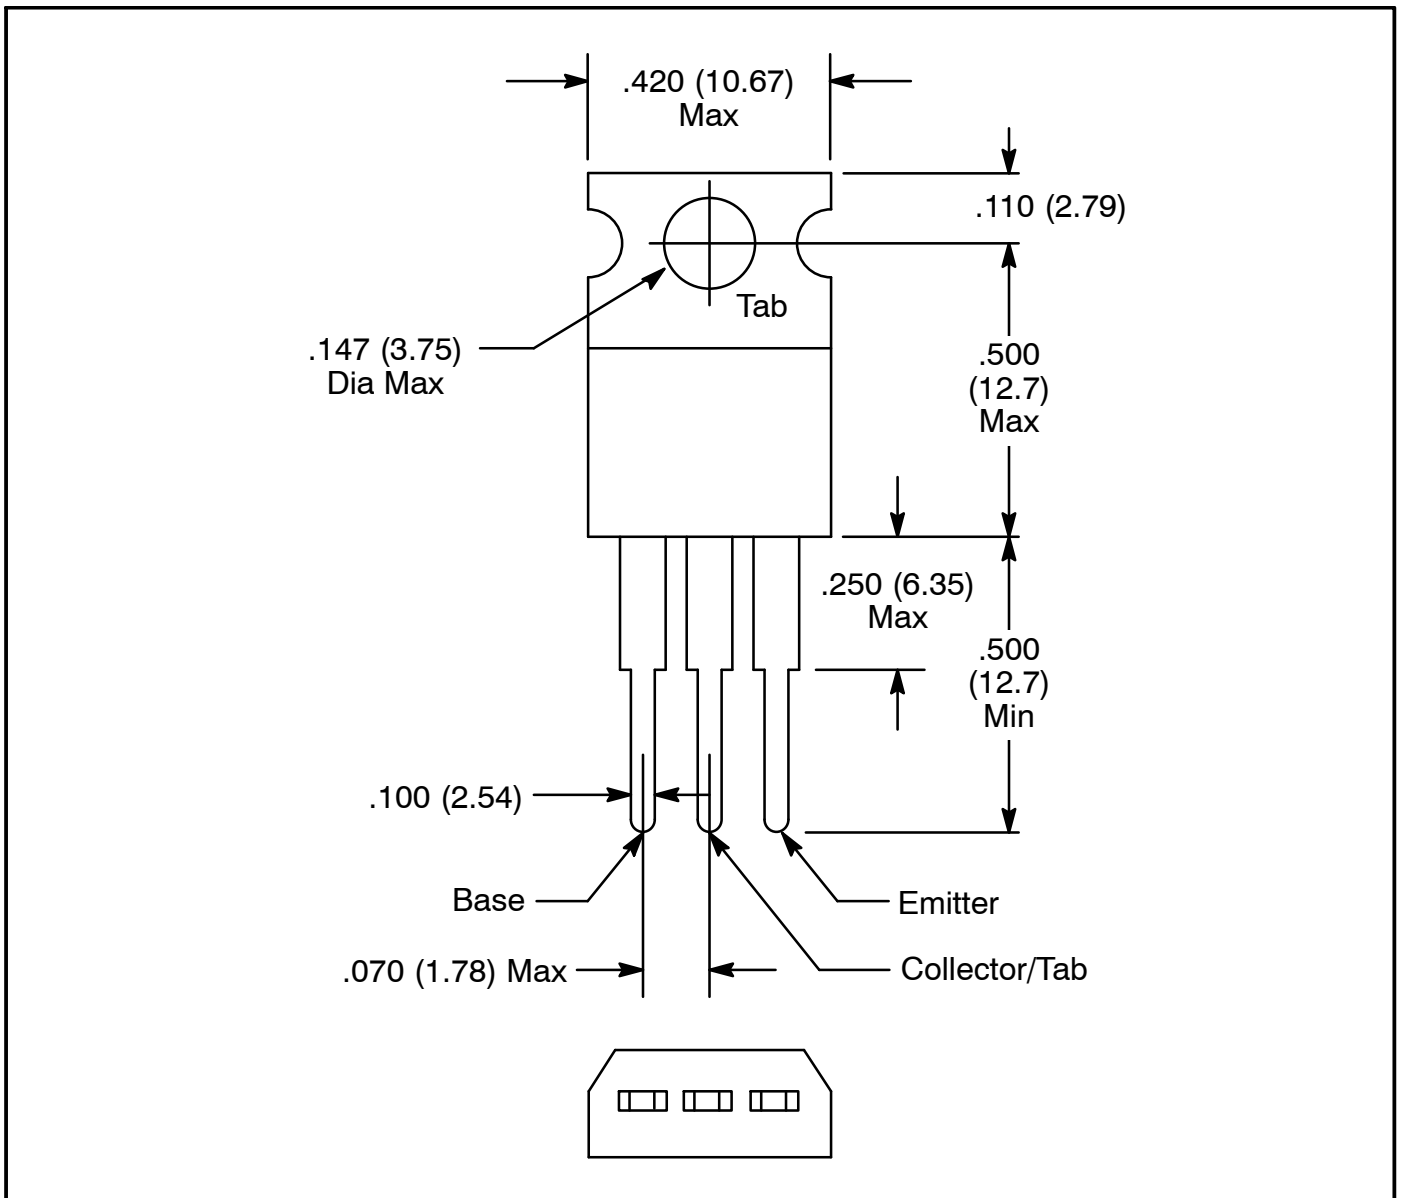

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [NTE manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)  
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)