

inspired LED

12VDC Class 2 Plug-In Power Supplies

Inspired LED's 12VDC Class 2 **Plug-in Power Supplies** are a simple, hassle-free way to power low voltage LEDs. Featuring our standard 3.5mm x 1.3 mm output plugs, these power supplies combine easily with Inspired LED products to create the perfect plug-and-play LED system for your home or business!




1 AMP Trimag (SKU# 3752)
 Class 2, Level VI, UL Listed E139777 3KZS
 1.6" (W) x 2.3" (H) x 1.3" (D)
 72" standard cable
 Input: 100-120 VAC, 50/60HZ, 0.3 AMP
 Output: 12VDC, 1 AMP
 (+) polarity indicated by white writing



2 AMP GME (SKU# 3542)
 Class 2, Level VI, UL Listed E251844
 1.79" (W) x 3.46" (H) x 1.29" (D)
 72" standard cable
 Input: 100-240 VAC, 50/60HZ, 0.8 AMP
 Output: 12VDC, 2 AMP
 (+) polarity indicated by white blocks



3.8 AMP GME (SKU# 4842)
 Class 2, Level VI, UL Listed E241618 85WU
 1.8" (W) x 3.8" (H) x 1.5" (D)
 72" standard cable
 Input: 100-240 VAC, 50/60HZ, 1.2 AMP
 Output: 12VDC, 3.8 AMP
 (+) polarity indicated by ribs

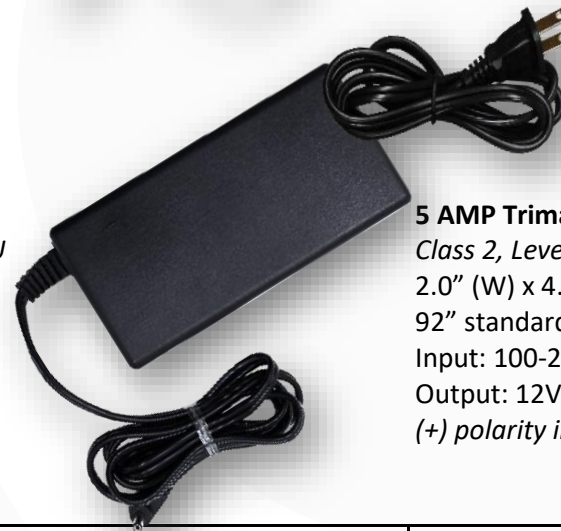

5 AMP Trimag (SKU# 3753)
 Class 2, Level VI, UL Listed E139777 3KSZ
 2.0" (W) x 4.6" (H) x 1.25" (D)
 92" standard cable
 Input: 100-240 VAC, 50/60HZ, 1.8 AMP
 Output: 12VDC, 5 AMP
 (+) polarity indicated by white blocks

Power Requirements*	Maximum Length of Flex Strip Lighting				Max Pro Series Panels		Max Designer Series Panels	
	Normal Bright	Super Bright	Ultra Bright	Mega Bright	21-LED	42-LED	10"	18"
1 Amp (12 Watt)	174" (10.8 Watt)	83.5" (10.8 Watt)	48.5" (10.8 Watt)	41.5" (10.8 Watt)	6 panels	3 panels	6 panels	3 panels
2 Amp (24 Watt)	347.5" (21.6 Watt)	166.5" (21.6 Watt)	97.5" (21.6 Watt)	84.5" (21.6 Watt)	12 Panels	6 Panels	12 Panels	6 Panels
3.8 Amp (45.6 Watt)	662" (41 Watt)	318" (41 Watt)	184.5" (41 Watt)	160.5" (41 Watt)	24 panels	12 panels	24 panels	12 panels
5 Amp (60 Watt)	871" (54 Watt)	418.5" (54 Watt)	243" (54 Watt)	211.5" (54 Watt)	32 panels	16 panels	32 panels	16 panels

**Please Note: Power requirements will vary slightly based upon system configuration, these are conservative values meant for general calculations only. Please contact Inspired LED directly for more information on powering large or complex systems.*



inspiredled.com



orders@inspiredled.com



(480) 941-4286



CLASS 2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [NthDegree](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [EUK-150S105DV](#) [LN1224CV](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 18W 24V ONE4ALL SC PRE](#) [LC 50W 200-350ML 170V FLEXC LP SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#) [LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC 34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#) [PWM-40-36](#) [PWM-60-36](#) [LUD-060S150BSF](#) [ESS010W-0750-12](#)