

OmniPreSense OPS241-B Short-Range Radar

OmniPreSense's OPS241-B is complete short-range FMCW (frequency modulated constant wave) radar solution providing range reporting for multiple objects in its field of view. All radar signal processing is done on board and a simple API reports the processed data. Flexible control over the reporting format and transmit power levels is provided.

The OPS241-B module can be connected to any Smart USB host (Raspberry Pi, Android device supporting OTG, PC or Mac) or Arduino using its UART interface to enable a simple IoT sensor.

Features

- 1-30m (3-98') detection range
- Range Resolution of 0.075m
- Reporting accuracy $\leq 10\%$
- Wide 78° beam width (-3 dB)
- UART and USB interface
- Simple API control, 14Hz report rate
- Industrial temp operation (-40 to +85°C)
- 1.4W Active power, 0.6W Idle power
- Small form factor 53 x 59 x 12 mm, 11g (sensor only)

Applications


- Traffic Monitoring
- IoT Sensor
- Drone/Robotics

Functionality


- Traffic Monitoring
- Speed/Direction Reporting
- Presence Detection
- Collision Avoidance



OPS241-B Sensor

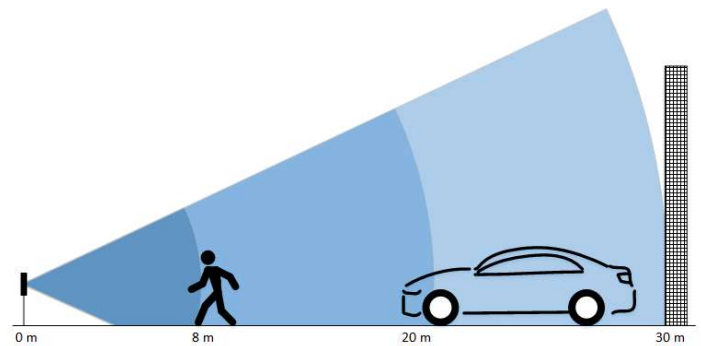

OPS241-B Detection Range

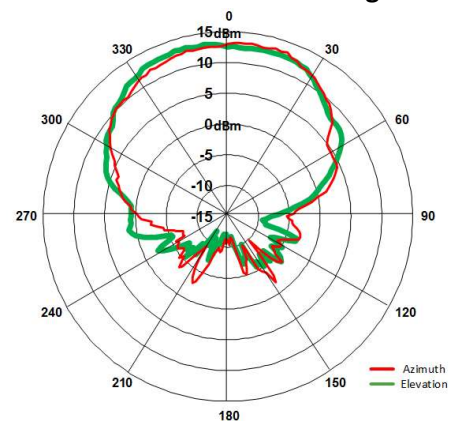

Antenna Pattern

Order Part Number

OPS241-B-FM-RP

Radar Sensor

www.omnipresense.com

OPS-PB-005-A

OmniPreSense Corporation 1650 Zanker Road, Suite 222 San Jose, CA 95112

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Distance Sensor Modules](#) category:

Click to view products by [OmniPreSense](#) manufacturer:

Other Similar products are found below :

[FP-D-405-5-C-F](#) [1137](#) [ILM12F-D-520-1-C-F](#) [ILM12F-DOE-520-7-289-F](#) [LC-LMD-635-03-01-A](#) [LC-LMD-650-01-03-A](#) [LC-LMD-650-02-01-A](#) [LC-LMD-650-02-03-A](#) [LC-LMD-650-03-01-A](#) [LC-LMD-650-05-05-A](#) [LC-LMD-780-01-01-A](#) [LC-LMD-780-01-03-A](#) [LC-LMD-850-01-01-A](#) [LC-LMD-850-01-03-A](#) [FP-D-520-10-C-F](#) [FP-D-520-5-C-F](#) [FP-D-650-1-C-F](#) [FP-L-520-10-50-C](#) [SEN0238](#) [TR-ONE-AS](#) [FP-D-405-16-E-F](#) [FP-D-635-13-E-F](#) [FP-D-635-17-C-F](#) [FP-D-635-3-E-F](#) [FP-D-635-40-C-F](#) [FP-D-635-7-E-F](#) [FP-D-635-8-C-F](#) [FP-D-650-20-C-F-24](#) [FP-D-650-25-E-F](#) [FP-D-650-3-E-F](#) [FP-D-660-40-C-F](#) [FP-D-670-1-C-F](#) [FP-D-850-1-C-F](#) [FP-D-850-5-E-F](#) [FP-D-905-7-E-F](#) [FP-L-650-1-50-C](#) [FP-L-905-5-50-C](#) [SEN0085](#) [FP-D-650-1-C-F-24V](#) [FP-MV18-ST-660-20-30-F-STD](#) [ILM12F-D-635-1-C-F](#) [ILM12F-L-520-7-58-F](#) [ILM12F-L-635-7-58-F](#) [LC-LMD-635-02-03-A](#) [LC-LMD-635-03-03-A](#) [LC-LMD-650-01-01-A](#) [LC-LMD-650-05-01-A](#) [28995](#) [FP-D-520-1-C-F](#) [FP-D-635-1-C-F-24V](#)