

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or unavteries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor and is officers, employees, uniotificated use, even if such claim any manner.


December 2014



FJB102 NPN High-Voltage Power Darlington Transistor

Features

- High DC Current Gain : h_{FE} = 1000 at V_{CE} = 4 V, I_C = 3 A (Minimum)
- Low Collector-Emitter Saturation Voltage

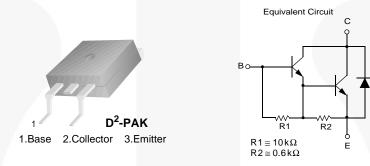

Ordering Information

Part Number	Top Mark	Package	Packing Method
FJB102TM	FJB102	TO-263 2L (D2PAK)	Tape and Reel

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at $T_c = 25^{\circ}C$ unless otherwise noted.

Symbol Parameter		Value	
V _{CBO}	Collector-Base Voltage	100	V
V _{CEO}	Collector-Emitter Voltage	100	V
V _{EBO}	Emitter-Base Voltage	5	V
Ι _C	Collector Current (DC)	8 15	
I _{CP}	Collector Current (Pulse) ⁽¹⁾		
Ι _Β	Base Current (DC)	1	А
P_{C} Collector Dissipation ($T_{C} = 25^{\circ}C$)		80	W
TJ	Junction Temperature	150	°C
T _{STG}	Storage Temperature Range	-65 to 150	°C


Note:


1. Pulse test: $pw \le 300 \ \mu s$, duty cycle $\le 2\%$.

Electrical Characteristics

Values are at $T_C = 25^{\circ}C$ unless otherwise noted.

Symbol	Parameter	Conditions	Min.	Max.	Unit
BV _{CEO} (sus)	Collector-Emitter Sustaining Voltage	I _C = 30 mA, I _B = 0	100		V
BV _{EBO}	Emitter-Base Breakdown Voltage	I _E = 500 μA, I _C = 0	10		V
I _{CBO}	Collector Cut-Off Current	$V_{CB} = 100 \text{ V}, I_{E} = 0$		50	μA
I _{CEO}	Collector Cut-Off Current	$V_{CE} = 50 \text{ V}, \text{ I}_{B} = 0$		50	μA
I _{EBO}	Emitter Cut-Off Current	$V_{EB} = 5 V, I_{C} = 0$		2	mA
h _{FE}	DC Current Gain	$V_{CE} = 4 V, I_{C} = 3 A$	1000	20000	
		$V_{CE} = 4 V, I_{C} = 8 A$	200		
V _{CE} (sat)		$I_{\rm C} = 3 \text{ A}, I_{\rm B} = 6 \text{ mA}$		2.0	V
	Collector-Emitter Saturation Voltage	I _C = 8 A, I _B = 80 mA		2.5	v
V _{BE} (on)	Base-Emitter On Voltage	$V_{CE} = 4 V, I_{C} = 8 A$		2.8	V
C _{ob}	Output Capacitance	$V_{CB} = 10 \text{ V}, \text{ I}_{E} = 0,$ f = 1 MHz		200	pF

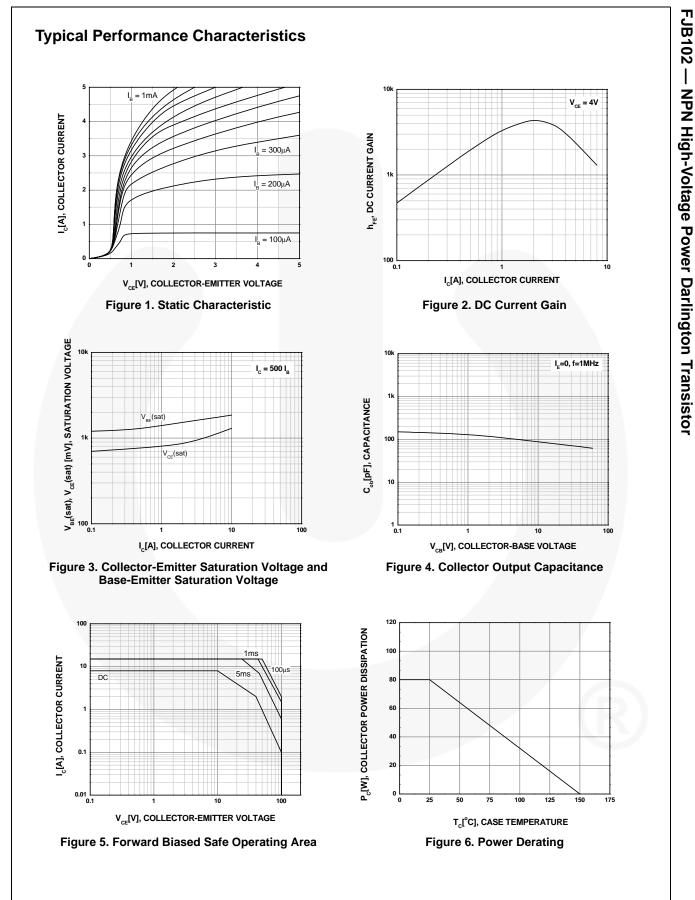

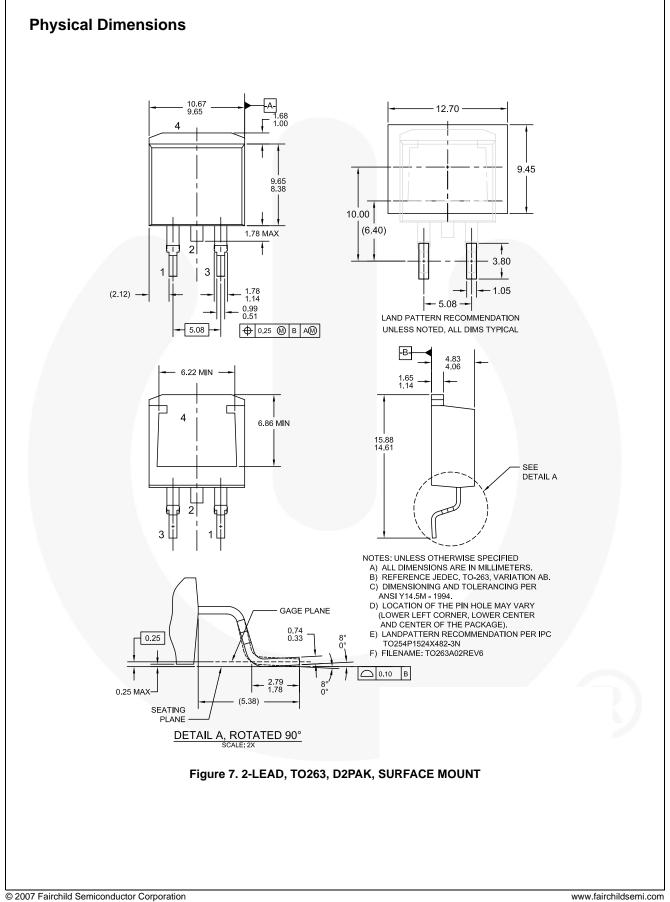

FAIRCHILD. TRADEMARKS The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks. AccuPower™ F-PFS™ **OPTOPLANAR[®]** Awinda **FRFET**[®] AX-CAP®* Global Power Resource ® TinyBoost® BitSiC™ GreenBridge™ TinyBuck® PowerTrench[®] Build it Now™ Green FPS™ TinyCalc™ PowerXS™ TinyLogic® CorePLUS™ Green FPS™ e-Series™ Programmable Active Droop™ CorePOWER™ Gmax™ TINYOPTO™ QFET **CROSSVOLT™** TinyPower™ GTO™ QS™ TinyPWM™ CTI ™ IntelliMAX™ Quiet Series™ TinvWire™ Current Transfer Logic™ RapidConfigure™ **DEUXPEED**[®] TranSiC™ Making Small Speakers Sound Louder ⊃™ Dual Cool™ and Better TriFault Detect™ Saving our world, 1mW/W/kW at a time™ EcoSPARK[®] TRUECURRENT®* MegaBuck™ SignalWise™ EfficientMax™ MICROCOUPLER™ μSerDes™ SmartMax™ ESBC™ MicroFET™ SMART START™ F R MicroPak™ Solutions for Your Success™ MicroPak2™ UHC Fairchild® SPM[®] MillerDrive™ Ultra FRFET™ Fairchild Semiconductor® STEALTH™ MotionMax™ UniFET™ FACT Quiet Series™ SuperFET[®] MotionGrid® VCX™ SuperSOT™-3 **FACT[®]** FAST® MTi[®] VisualMax™ SuperSOT™-6 MTx® VoltagePlus™ FastvCore™ SuperSOT™-8 MVN® XS™ SupreMOS® FETBench™ mWSaver® Xsens™ **FPS™** SyncFET™ OptoHiT™ 仙童™ Sync-Lock™ **OPTOLOGIC®**

* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT <u>HTTP://WWW.FAIRCHILDSEMI.COM</u>. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 172

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor haves against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death a

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Darlington Transistors category:

Click to view products by ON Semiconductor manufacturer:

Other Similar products are found below :

 NJVMJD128T4G
 281287X
 BDV64B
 NJVMJD117T4G
 LB1205-L-E
 2N6053
 MPSA14
 TIP140
 MPSA13
 TIP127L-BP
 2N6383

 ULN2003ACM/TR
 2N7371
 2N6058
 2N6059
 2N6051
 MJ2501
 MJ3001
 2SB1560
 2SB852KT146B
 2SD2560
 TIP112TU
 BCV27

 MMBTA13-TP
 MMSTA28T146
 NTE2557
 NJVNJD35N04T4G
 MPSA29-D26Z
 FJB102TM
 BSP61H6327XTSA1
 BU941ZPFI

 2SD1980TL
 NTE2350
 NTE245
 NTE2649
 NTE46
 NTE98
 ULN2003ADR2G
 NTE2344
 NTE2405
 NTE243
 NTE244

 NTE247
 NTE248
 NTE253
 NTE2548
 NTE261