

Type ACBP4-PL Auto Reset Circuit Breaker Automotive Type I Regular Automotive Blade Type



www.optifuse.com (619) 593-5050




Specifications:

Automatic Reset Type Circuit Breaker
 – Regular Blade Style
 Voltage: Up to 14VDC
 Amperage: 5A, 6A, 7.5A, 8A, 10A, 15A,
 20A, 25A, 30A
 Materials: Thermoplastic – (UL Rated 94-V-0)
 Terminals: Tin plated Brass Alloy
 Conforms to:
 American National Standard SAE J553 Type I
 Operating Temperature: -40° C ~ 85° C

| Part Number | Amperage | Body Color |
|---------------|----------|------------|
| ACBP4-PL-5A | 5A | Lt. Brown |
| ACBP4-PL-6A | 6A | Black |
| ACBP4-PL-7.5A | 7.5A | Brown |
| ACBP4-PL-8A | 8A | Brown |
| ACBP4-PL-10A | 10A | Red |
| ACBP4-PL-15A | 15A | Blue |
| ACBP4-PL-20A | 20A | Yellow |
| ACBP4-PL-25A | 25A | White |
| ACBP4-PL-30A | 30A | Green |


Cover is color coded to Amperage Ratings

Mechanical Dimensions: Inches [mm]

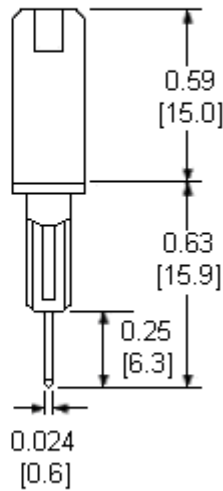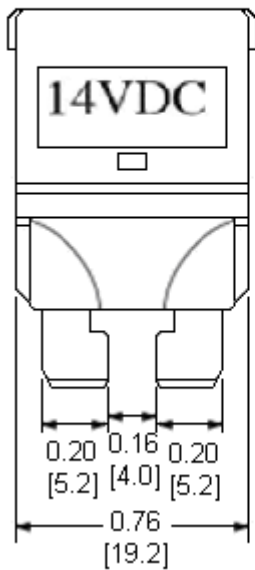

| Ampere Rated | Interrupt Rating |
|-----------------|------------------|
| 5A-10A version | 150A @ 14 VDC |
| 15A version | 225A @ 14 VDC |
| 20A version | 300A @ 14 VDC |
| 25A-30A version | 450A @ 14 VDC |

Time Current Curve

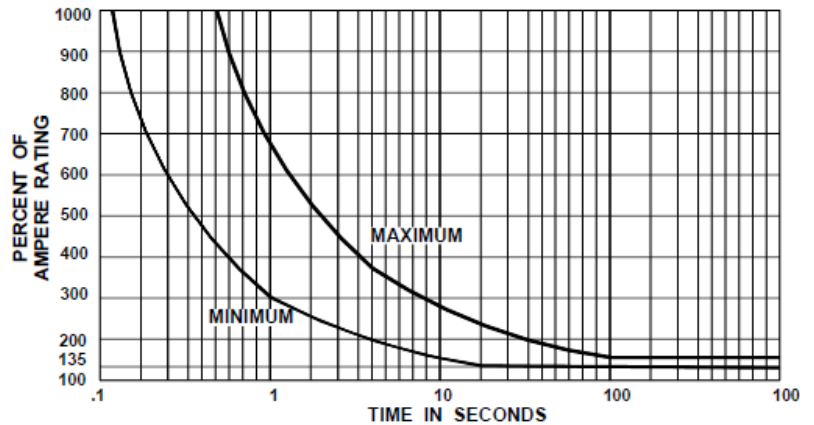

Warning:



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- Device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.
- Not intended for submersible water applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Optifuse manufacturer](#):

Other Similar products are found below :

[FSC-3.5A](#) [TSA-250MA](#) [BLR-304](#) [BLR-504](#) [BLC-05-GTA](#) [BLR-I-504](#) [BLM-304](#) [CBW57-EL4-10A](#) [FPK-10A](#) [FPK-1A](#) [FPK-30A](#) [LPM-08](#)
[LPX-23B-08R-LOOP](#) [FPK-12A](#) [FPK-15A](#) [FPK-20A](#) [FPK-25A](#) [FPK-2A](#) [FPK-3A](#) [FPK-4A](#) [FPK-5A](#) [FPK-6A](#) [FPK-7A](#) [FPK-8A](#) [FPK-R-](#)
[1.5A](#) [FPK-R-10A](#) [FPK-R-15A](#) [FPK-R-1A](#) [FPK-R-20A](#) [FPK-R-25A](#) [FPK-R-2A](#) [FPK-R-30A](#) [FPK-R-3A](#) [FPK-R-4A](#) [FPK-R-5A](#) [FPK-R-6A](#)
[FPK-R-8A](#) [LPM-01B-12R](#) [ACB-12-V-50A](#) [LPR-13C-10R](#) [ACBP4-PM-5A](#) [BLR-306](#) [ACB-12-V-30A](#) [CBW57-EL4-5A](#) [CBW57-ES-5A](#)
[CBW57-PB-10A-5X](#) [CBW57-PS-10A-5X](#) [CBW57-PS-3A-1X](#) [CBW28-1A](#) [FCD-4A](#)