

Type ANM-UL Automotive Blade Fuse Miniature w/ UL Approval



www.optifuse.com (619) 593-5050

Specifications:

- **Voltage:** 32V DC
- **Amperage:** 2A, 3A, 4A, 5A, 7.5A, 10A, 15A, 20A, 25A, 30A
- **Body:** Nylon PA66
- **Terminals:** Zinc Alloy, Tin plated
- **Interrupt Rating:** 1000A @ 32V DC

Agency Standards and Listings:




Designed to meet ISO 8820-3 Standards.

| Part Number | Amperage | Body Color | Voltage Drop |
|-------------|----------|-------------|--------------|
| ANM-UL-2A | 2A | Gray | 225 mV |
| ANM-UL-3A | 3A | Violet | 200 mV |
| ANM-UL-4A | 4A | Pink | 200 mV |
| ANM-UL-5A | 5A | Tan | 175 mV |
| ANM-UL-7.5A | 7.5A | Brown | 150 mV |
| ANM-UL-10A | 10A | Red | 140 mV |
| ANM-UL-15A | 15A | Blue | 125 mV |
| ANM-UL-20A | 20A | Yellow | 125 mV |
| ANM-UL-25A | 25A | Clear/White | 125 mV |
| ANM-UL-30A | 30A | Green | 120 mV |

| Time Characteristics: | | |
|-----------------------|---------------|---------------|
| % of Rated Current | Min Hold Time | Max Hold Time |
| 110% | 100h | |
| 135% | 750ms | 1800s |
| 200% | 150ms | 5s |
| 350% | 40ms | 500ms |
| 600% | 20ms | 200ms |

Mechanical Dimensions: mm (Inches)

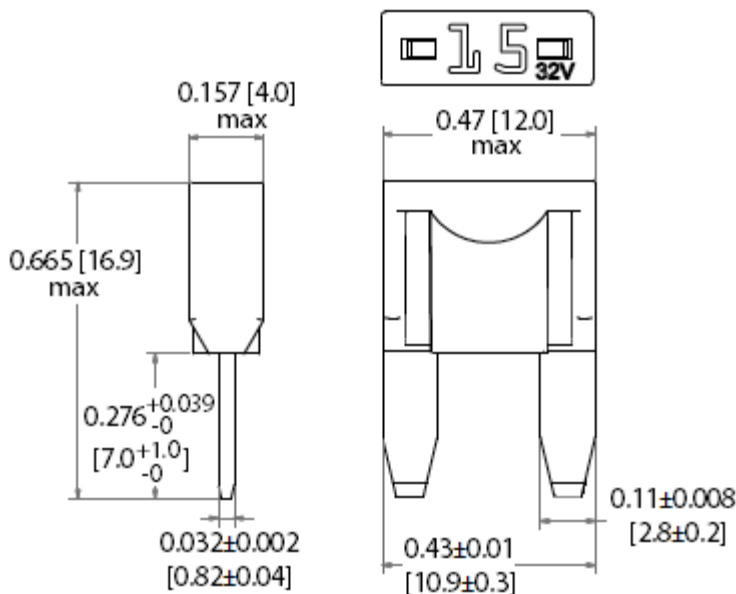

Warning:



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Optifuse manufacturer](#):

Other Similar products are found below :

[FSC-3.5A](#) [TPK-10A](#) [TSA-250MA](#) [BLR-304](#) [BLR-504](#) [BLC-05-GTA](#) [BLR-I-504](#) [BLM-304](#) [CBW57-EL4-10A](#) [FPK-10A](#) [FPK-1A](#) [FPK-30A](#) [LPM-08](#) [LPX-23B-08R-LOOP](#) [FPK-12A](#) [FPK-15A](#) [FPK-20A](#) [FPK-25A](#) [FPK-2A](#) [FPK-3A](#) [FPK-4A](#) [FPK-5A](#) [FPK-6A](#) [FPK-7A](#) [FPK-8A](#) [FPK-R-1.5A](#) [FPK-R-10A](#) [FPK-R-15A](#) [FPK-R-1A](#) [FPK-R-20A](#) [FPK-R-25A](#) [FPK-R-2A](#) [FPK-R-30A](#) [FPK-R-3A](#) [FPK-R-4A](#) [FPK-R-5A](#) [FPK-R-6A](#) [FPK-R-8A](#) [LPM-01B-12R](#) [ACB-12-V-50A](#) [LPR-13C-10R](#) [ACBP4-PM-5A](#) [BLR-306](#) [ACB-12-V-30A](#) [CBW57-EL4-5A](#) [CBW57-ES-5A](#) [CBW57-PB-10A-5X](#) [CBW57-PS-10A-5X](#) [CBW57-PS-3A-1X](#) [CBW28-1A](#)