

Type ANR-UL

Automotive Blade Fuse

Standard w/ UL Approval



www.optifuse.com (619) 593-5050

Specifications:

- **Voltage:** 32V DC
- **Amperage:** 1A, 2A, 3A, 4A, 5A, 7.5A, 10A, 15A, 20A, 25A, 30A, 35A, 40A
- **Body:** Nylon PA66
- **Terminals:** Zinc Alloy, Tin plated
- **Interrupt Rating:** 1000A @ 32V DC

Agency Standards and Listings:




Designed to meet ISO 8820-3 Standards.

Part Number	Amperage	Body Color	Voltage Drop
ANR-UL-1A	1A	Black	250 mV
ANR-UL-2A	2A	Gray	225 mV
ANR-UL-3A	3A	Violet	200 mV
ANR-UL-4A	4A	Pink	200 mV
ANR-UL-5A	5A	Tan	175 mV
ANR-UL-7.5A	7.5A	Brown	150 mV
ANR-UL-10A	10A	Red	140 mV
ANR-UL-15A	15A	Blue	125 mV
ANR-UL-20A	20A	Yellow	125 mV
ANR-UL-25A	25A	Clear/White	125 mV
ANR-UL-30A	30A	Green	120 mV
ANR-UL-35A	35A	Dark Green	120 mV
ANR-UL-40A	40A	Orange	120 mV

Time Characteristics:		
% of Rated Current	Min Hold Time	Max Hold Time
100%	100h	-
135%	750ms	1800s
200%	150ms	5s
350%	40ms	500ms
600%	20ms	200ms

Mechanical Dimensions: mm (Inches)

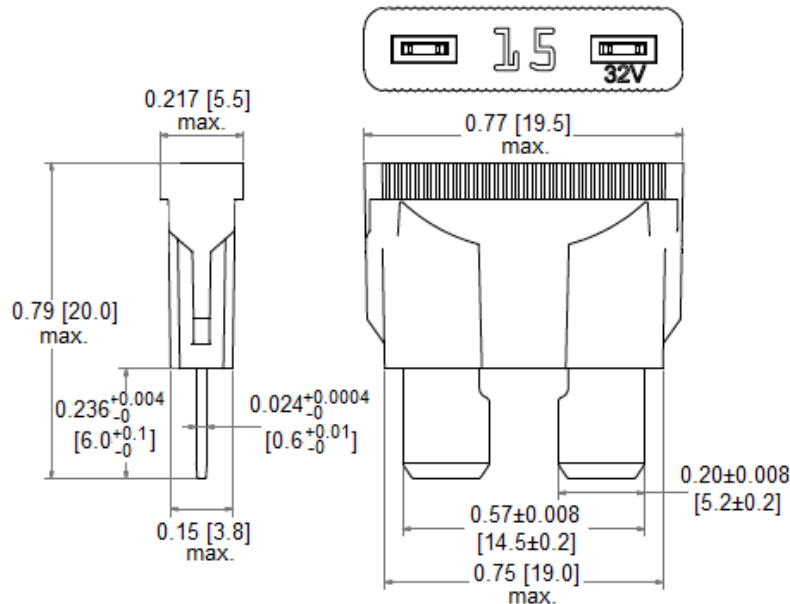

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Optifuse](#) manufacturer:

Other Similar products are found below :

[ACB-12-V-30A](#) [ACB-12-V-50A](#) [ACBP4-PM-5A](#) [ANM-2A](#) [ANM-3A](#) [ANM58-1A](#) [ANR58-UL-10A](#) [ANR58-UL-20A](#) [ANR58-UL-2A](#)
[ANR58-UL-30A](#) [ANR58-UL-3A](#) [ANR58-UL-5A](#) [ANR80-UL-40A](#) [ANR80-UL-5A](#) [APM-35A](#) [APM-5A](#) [APR-10A](#) [APR-1A](#) [APR-20A](#)
[APR-25A](#) [APR-2A](#) [APR-30A](#) [APR-3A](#) [APR-4A](#) [APR58-UL-10A](#) [APR58-UL-15A](#) [APR58-UL-1A](#) [APR58-UL-30A](#) [APR58-UL-40A](#) [APR-](#)
[7.5A](#) [APX-100A](#) [BLC-05-GTA](#) [BLC-09-GT](#) [BLC-20A](#) [BLC-20C](#) [BLM-304](#) [BLR-304](#) [BLR-306](#) [BLR-504](#) [BLR-I-301](#) [BLR-I-504](#)
[CBW28-1A](#) [CBW28-2A](#) [CBW57-EL4-10A](#) [CBW57-EL4-5A](#) [CBW57-ES-10A-5H](#) [CBW57-ES-3A](#) [CBW57-ES-5A](#) [CBW57-HS-15A-5X](#)
[CBW57-PB-10A-5X](#)