

Type CNR-01 PC Board Type Fuse Clip Standard Auto Blade Fuses



www.optifuse.com (619) 593-5050

Specifications:

Voltage Rating: 500V AC / 250V DC

Amperage Rating: See Chart

Body Material: See Chart



Finish: Bright Tin-plated

(For Matte Tin-plated add -CE at end of part number ...ie. CNR-01-PCU-CE)


For use with Type APR, ANR Fuses (Standard-Auto Blade Type)

Part number:	Material	Amperage Rating
CNR-01	Spring Bronze	15A Max.
CNR-01-PCU	Phosphor Bronze	20A Max.
CNR-01-BECU	Beryllium Bronze	40A Max.

Mechanical Dimensions: Inches [mm]

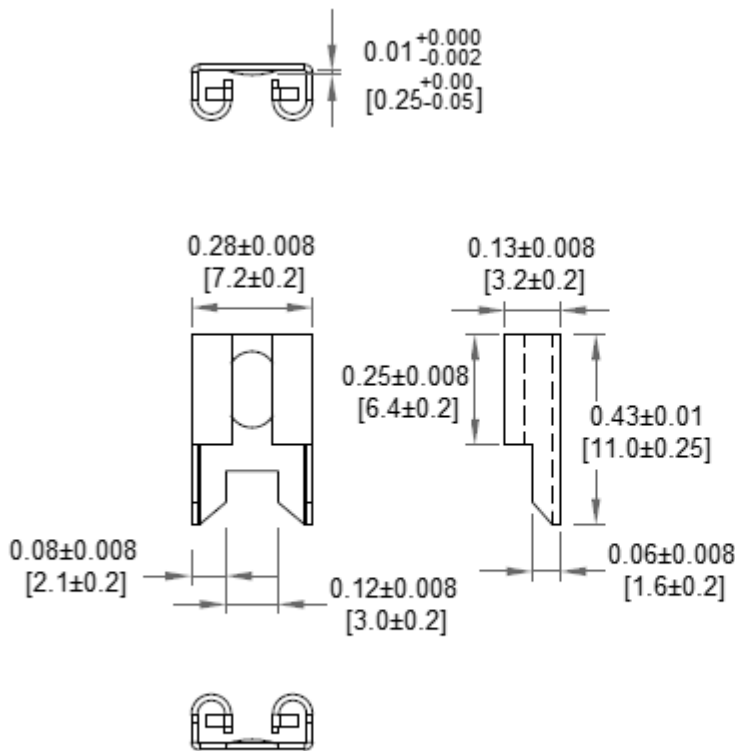

MOUNTING DETAILS

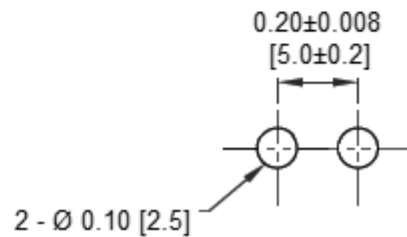

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuse Holder](#) category:

Click to view products by [Optifuse](#) manufacturer:

Other Similar products are found below :

[570-290-741P40](#) [570-290-751P40](#) [020417G](#) [020418E](#) [6R30A1B](#) [F600A3B](#) [80910030](#) [8601.2020](#) [G15A2SPQ](#) [9-3557-GP REV A](#) [HDJ-B](#)
[R6J30A3S](#) [HFH-1](#) [RF30A1S](#) [RF30A2B](#) [RF30A3SP](#) [15600-08-10](#) [BK/FHN19G](#) [BK/HHM](#) [BK/HKP-CCHH](#) [BK/HKP-JJ](#) [BK/HTJ-LES-](#)
[FUSE](#) [HMG-241](#) [HTJ-LES-FUSE](#) [C4044-1](#) [2086-1](#) [2193](#) [2602](#) [2650](#) [178.000100](#) [FHN31G1](#) [T30A2B](#) [G4PB8](#) [2660](#) [2799](#) [CQ-209V](#) [HKP-](#)
[CCHH](#) [R6F30A2S](#) [341001A](#) [345621A](#) [CVRMCC](#) [4202](#) [4407](#) [4408](#) [4413](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [BK/FHN31G1](#)